

**CASE**  
CONSTRUCTION

# CXB HYDRAULIC EXCAVATORS

CX800B



# CXB HYDRAULIC EXCAVATORS

## CX800B

Case has been at the cutting edge of the bulk earthmoving and muckshifting industry for many years. Case equipment plays a leading role in major infrastructure and construction projects around the world, with Case customers confident that they have the right machine to meet their needs

The CX800B takes Case to new levels of productivity and performance. Boasting legendary durability and reliability, the CX800B is the most powerful machine in the Case line-up.

### Power to perform

The CX800B is powered by an EU Stage IIIA compliant Isuzu engine, offering 532 hp (397 kW) of power and an incredible 2,250 Nm of torque. This electronically-controlled power plant offers proven low fuel consumption and reduced exhaust emissions, yet has class-leading performance.

### Operator satisfaction

The expansive CX-B series cab offers class-leading levels of visibility and comfort for the operator. With increased glazed area, including a single piece right hand window, the operator has a commanding view of the working area.

### Ultimate productivity

Twin variable displacement hydraulic pumps provide up to 500 litres/min each of flow, allowing a dipper arm digging force of 317 kN and a bucket breakout force of 430 kN in mass excavation layout.

### Service access

Large wide opening access doors and sturdy non-slip walkways on both sides of the machine provide ease of maintenance for technicians. All filters are centrally grouped with green oil drain facilities for engine oil. A hydraulically-driven cooling fan can be reversed on start up to blow out dust and debris.

### Mass excavation

The CX800B mass excavation is equipped with a 7.25m main boom and a extra heavy duty 2.98m dipperstick, for maximum penetration and increased loading productivity







# CXB HYDRAULIC EXCAVATORS

CX800B

## Precision control

Through the Case Intelligent Computer Command Control System (ICCCS) the operator has complete control of engine output and hydraulic power. With a choice of operating modes, the operator has a Superpower function, with automatic Power Boost, for maximum tearout and reduced cycle times.

Customer peace of mind is assured with total protection of the hydraulic system, thanks to a synthetic filter that ensures the lowest possible levels of contamination. This advanced filter provides hydraulic oil change intervals of up to 5,000 hours, reducing downtime and operating costs.

Dedicated boom and arm combinations, including a short stick mass excavation format, provide increased productivity in all operating conditions. The CX800B can handle buckets with capacities up to 5m<sup>3</sup>.





## Environmental responsibility

The CX800B uses the same well proven fuel efficient Isuzu six cylinder engine as the CX700B. However power is increased by 15% and torque is up by 13.6%, providing increased productivity and performance in all conditions. The engine is EU Stage IIIA compliant, offering low specific fuel consumption and cleaner exhaust emissions.

Pilot fuel injection and a hydraulically-driven cooling fan contribute to greatly reduced noise levels, both in the cab and outside the machine.



# CXB HYDRAULIC EXCAVATORS

CX800B



## Improved visibility

The CXB series cab offers larger glazed area and reduced pillar width for improved all round visibility. Despite the slim pillars, the cab structure is up to three times stronger, reducing noise and vibration for the operator.



## Hydraulic force

With up to 500 litres of flow from each of the system's two variable displacement hydraulic pumps the CX800B has the power to perform in the toughest environment. Through the use of the ICCCS control system, the operator can achieve the perfect balance between performance and economy.



## Premium control and comfort

Multi-mode hydraulic control with Superpower and Power Boost provides the operator with maximum performance when required. The fully adjustable levers are fine tuned for perfect control, increasing operator confidence and boosting productivity. The CX-B cab is considerably larger, with up to 60 mm of additional foot space. The footrests and controls have been positioned for maximum comfort. Climate control air-conditioning is standard, with multiple air vents providing the optimum working environment for the operator.





#### **Application specific**

A choice of general purpose dipper arms are available, with a short mass excavation arm suitable for the toughest digging and loading tasks. Dipper arm digging force is up to 317 kN with a bucket breakout force of 430 kN, providing the CX800B with the power to perform in quarry and rock applications.



#### **Increased versatility**

Not just an incredible earthmoving machine, the CX800B can be supplied with auxiliary hydraulic hoses to power a range of attachments. An 8m one piece boom is available for long reach applications and the machine has an attachment cushion control for both boom and arm.



#### **Durability and reliability**

Sturdy underbelly plates protect the underside of the machine. EMS Extended Maintenance System bushings, provide 1,000 hour greasing intervals on all pins except the attachment linkage. Anti-friction shims at the base of the boom limit friction and noise during operation.



#### **Proven driveline**

All Case track components are designed for extended durability, proven in the most arduous working conditions across the world. Heat treated sprockets, improved track guides and increased pin hardness results in extended operating life. Three-piece undercarriage covers protect hydraulic lines.



# CXB HYDRAULIC EXCAVATORS

CX800B

## Ultimate environment

The Case CXB range of hydraulic excavators feature one of the largest, most comfortable cabs in the business. Class-leading levels of visibility, thanks to larger glazed areas and slim pillars, provide the operator with an unparalleled view to the working area.

A comfortable fully reclining operator's seat, standard air conditioning with nine outlet louvres to distribute heat and ventilation ensure that the driver remains comfortable throughout the working day. Cup holders, a clock, a mobile phone holder, a built-in coolbox and numerous storage compartments make the Case cab the ideal environment to ensure maximum productivity.

The cab sits on isolating mountings that reduce noise and vibration, improving the working environment for the operator and boosting productivity.





## Service simplicity results in reduced downtime

Wide walkways and large opening doors provide easy access to the filters, making regular maintenance easier and safer for service engineers. Green engine oil drain taps are supplied to ensure that there is no risk of contamination on sensitive ground.

The machine is equipped with a high flow electric refuelling pump with auto shut-off, which in combination with a large fuel tank results in reduced downtime. Electrical switches and connections are located in a centralised sealed cabinet within the cab, ensuring that sensitive electronics are protected from dust and weather ingress.

The CX800B uses Extended Maintenance System (EMS) bushings on all pins except for the attachment linkage. EMS bushings allow 1,000 hour greasing intervals, with 250 hour intervals on the attachment pins. Anti-friction shims further reduce wear on the boom foot and head linkage, cutting noise and operating cost for the customer.



# CXB HYDRAULIC EXCAVATORS

CX800B







# CXB HYDRAULIC EXCAVATORS

CX800B

## Specifications

### Engine

Make \_\_\_\_\_ ISUZU  
Type \_\_\_\_\_ AH-6WG1XYSS-02  
Water-cooled, 4-cycle diesel, 6-cylinder in line, direct injection,  
Turbocharger with air cooled intercooler, without cooling fan  
Number of cylinders \_\_\_\_\_ 6  
Bore/Stroke \_\_\_\_\_ 147 x 154 mm  
Horsepower 80/1269/EEC \_\_\_\_\_ 532 hp (397 kW) @ 1800 rpm  
Maximum torque 80/1269/EEC \_\_\_\_\_ 2250 Nm @ 1500 rpm

### Hydraulic system

Max output \_\_\_\_\_ 2 x 500 l/min @ 1800 rpm  
2 variable displacement axial piston pumps \_\_\_\_\_ Yes  
Attachment \_\_\_\_\_ 31.4 MPa  
Swing circuit \_\_\_\_\_ 26.5 MPa  
Travel \_\_\_\_\_ 34.3 Mpa

### Swing

Max upperstructure swing speed \_\_\_\_\_ 6.4 rpm

### Travel

Travel motor \_\_\_\_\_ Variable displacement axial piston motor  
Max travel speed \_\_\_\_\_ 4.2 km/h (Automatic travel speed shifting)  
Low travel speed \_\_\_\_\_ 2.9 km/h  
Gradeability \_\_\_\_\_ 70% (35°)  
Drawbar pull \_\_\_\_\_ 565 kN

### Electrical system

Circuit \_\_\_\_\_ 24V  
Alternator \_\_\_\_\_ 50 Amp

### Undercarriage

Number of carriers rollers (each side) \_\_\_\_\_ 3  
Number of track rollers (each side) \_\_\_\_\_ 8  
Number of shoes each side \_\_\_\_\_ 51  
Type of shoe \_\_\_\_\_ Double grouser shoe

### Circuit and component capacities

Fuel tank \_\_\_\_\_ 900 l  
Hydraulic system \_\_\_\_\_ 720 l  
Engine cooling system \_\_\_\_\_ 133 l

## Bucket

### Heavy duty bucket with teeth/Toplok

SAE Heaped Capacity	2400 l	2780 l	3300 l	3700 l	4100 l	5000 l
Width	1300 mm	1450 mm	1650 mm	1800 mm	1900 mm	2300 mm

### Extreme duty bucket with Toplok

SAE Heaped Capacity	2400 l	2780 l	3300 l	3700 l	4100 l
Width	1300 mm	1450 mm	1650 mm	1800 mm	1900 mm


### Rock

SAE Heaped Capacity	4110 l
Width	1800 mm



## General dimensions

With 8.40 m standard boom

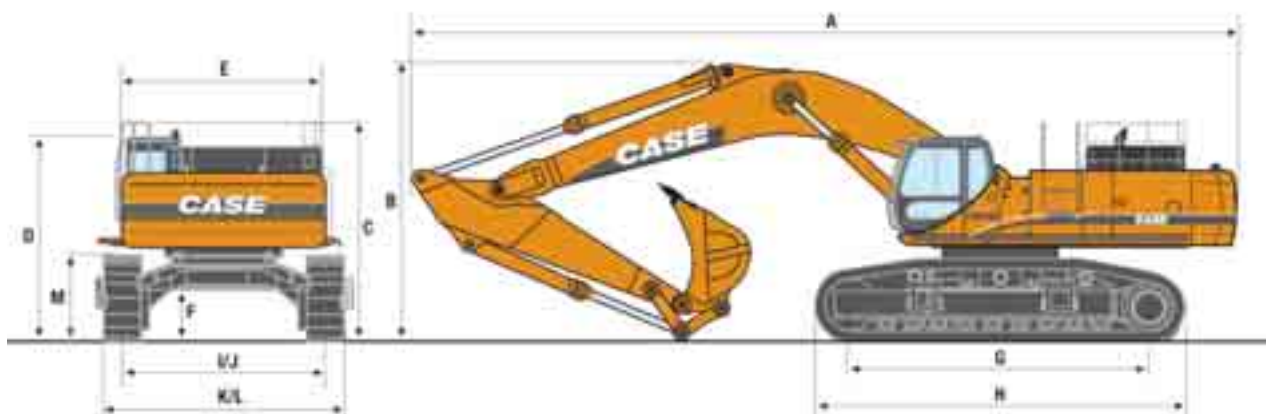

	Arm 3.66 m	Arm 4.44 m	Arm 5.62 m
Overall length (without attachment)	7640 mm	7640 mm	7640 mm
A Overall length (with attachment)	14360 mm	14320 mm	13830 mm
B Overall height (with attachment)	4810 mm	5000 mm	6300 mm
C Overall height (without attachment)	3880 mm	3880 mm	3880 mm
D Cab height	3570 mm	3570 mm	3570 mm
E Upper structure overall width (without catwalks)	3470 mm	3470 mm	3470 mm
Upper structure overall width (with catwalks)	4250 mm	4250 mm	4250 mm
Swing (rear end) radius	4300 mm	4300 mm	4300 mm
Clearance height under upper structure	1590 mm	1590 mm	1590 mm
F Minimum ground clearance	890 mm	890 mm	890 mm
G Wheel base (Center to center of wheels)	5070 mm	5070 mm	5070 mm
H Crawler overall length	6360 mm	6360 mm	6360 mm
I Track gauge (Extended)	3450 mm	3450 mm	3450 mm
J Track gauge (Retracted)	2830 mm	2830 mm	2830 mm
K Undercarriage overall width (Extended) (with 650 mm shoes)	4360 mm	4360 mm	4360 mm
L Undercarriage overall width (Retracted) (with 650 mm shoes)	3740 mm	3740 mm	3740 mm
M Crawler tracks height	1500 mm	1500 mm	1500 mm

## Weight and ground pressure

With 3.66 m Arm, 3.3 m<sup>3</sup> bucket, operator, lubricant, coolant and full fuel tank

	Weight (kg)	Ground pressure (MPa)
650 mm grouser shoe	80.300	0.11

MASS EXCAVATOR. With 2.98 m Arm, 4.1 m<sup>3</sup> bucket, operator, lubricant, coolant and full fuel tank


	Weight (kg)	Ground pressure (MPa)
650 mm grouser shoe	80.400	0.11

# CXB HYDRAULIC EXCAVATORS

CX800B

## Performance data

With 8.40 m standard boom

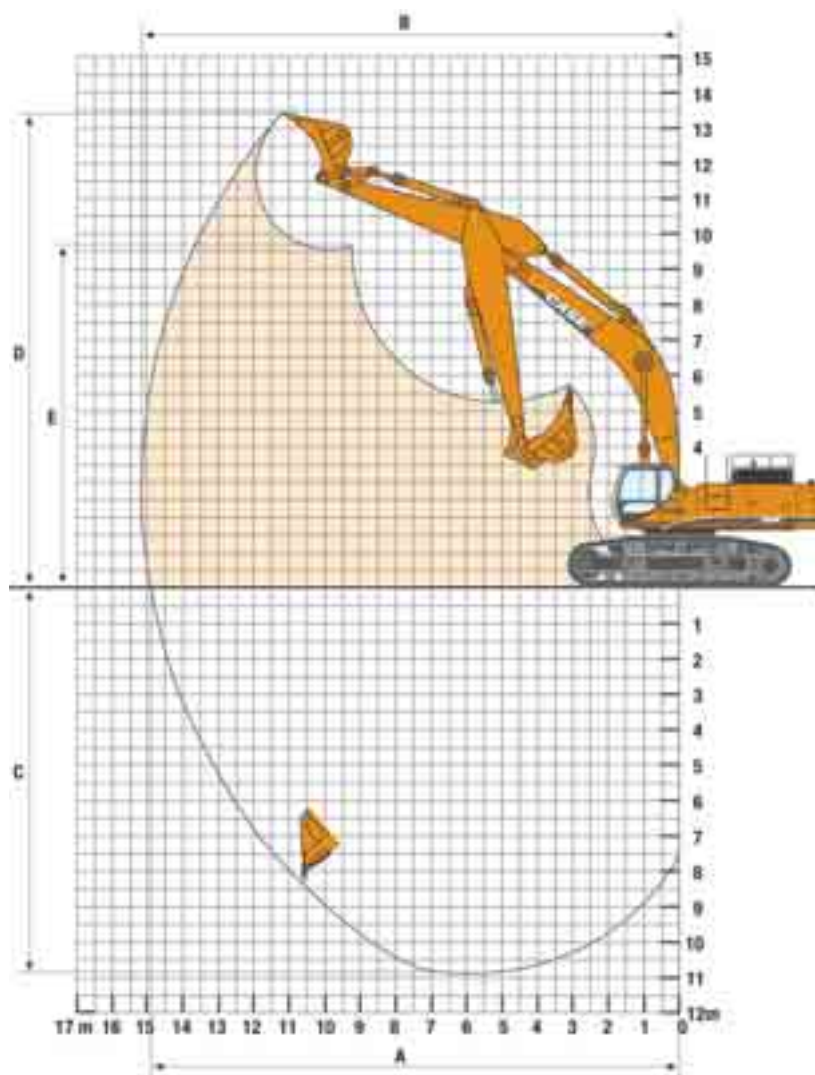

	Arm 3.66 m	Arm 4.44 m	Arm 5.62 m
Boom length	8400 mm	8400 mm	8400 mm
Bucket radius	2200 mm	2200 mm	2200 mm
Bucket wrist action	167 °	167 °	167 °
A Maximum reach at GRP	13840 mm	14680 mm	15860 mm
B Maximum reach	14120 mm	14940 mm	16110 mm
C Max. digging depth	8690 mm	9470 mm	10560 mm
D Max. digging height	12910 mm	13600 mm	14300 mm
E Max. dumping height	8920 mm	9510 mm	10170 mm
Arm digging force	274 kN	232 kN	195 kN
Bucket digging force	330 kN	330 kN	330 kN






# CXB HYDRAULIC EXCAVATORS

CX800B


## General dimensions - Mass excavator

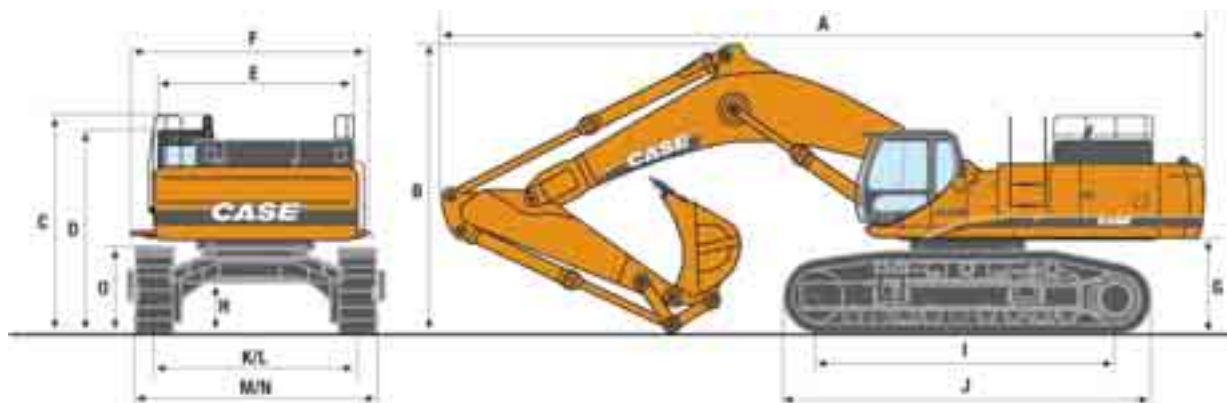

Arm 2.98 m

	Overall length (without attachment)	7640 mm
A	Overall length (with attachment)	13230 mm
B	Overall height (with attachment)	5000 mm
C	Overall height (without attachment)	3880 mm
D	Cab height	3570 mm
E	Upper structure overall width (without catwalks)	3470 mm
F	Upper structure overall width (with catwalks)	4250 mm
	Swing (rear end) radius	4300 mm
G	Clearance height under upper structure	1590 mm
H	Minimum ground clearance	890 mm
I	Wheel base (Center to center of wheels)	5070 mm
J	Crawler overall length	6360 mm
K	Track gauge (Extended)	3450 mm
L	Track gauge (Retracted)	2830 mm
M	Undercarriage overall width (Extended) (with 650 mm shoes)	4360 mm
N	Undercarriage overall width (Retracted) (with 650 mm shoes)	3740 mm
O	Crawler tracks height	1500 mm

## Performance data - Mass excavator

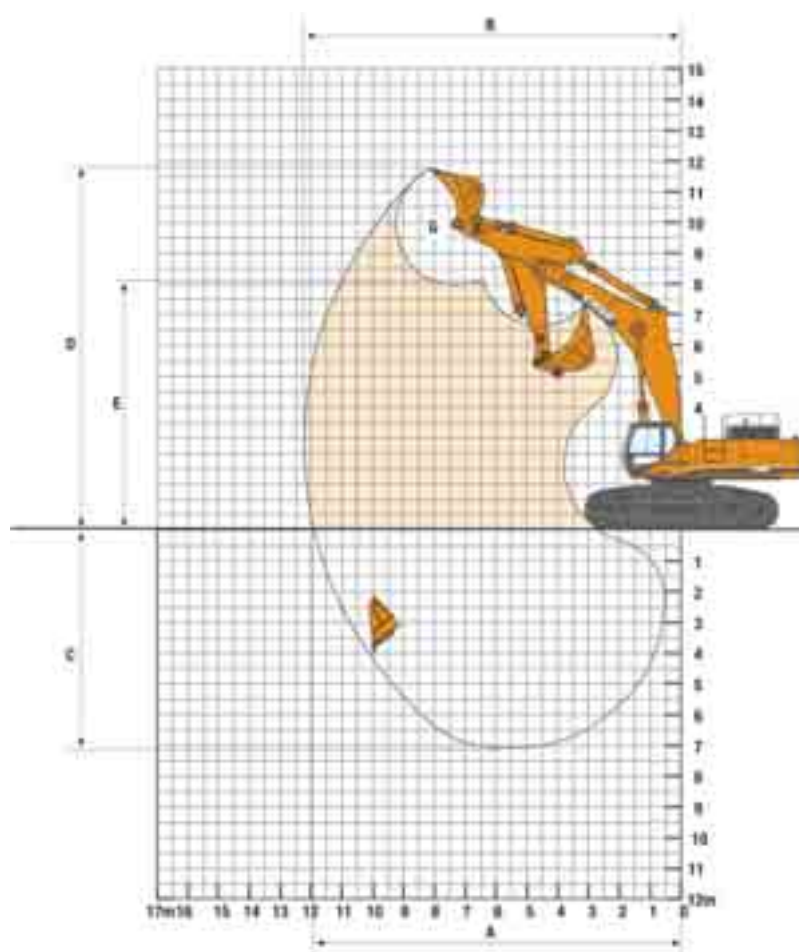

	<b>Arm 2.98 m</b>
<b>Boom length</b>	<b>7250 mm</b>
<b>Bucket radius</b>	<b>2200 mm</b>
<b>Bucket wrist action</b>	<b>162 °</b>
<b>A Maximum reach at GRP</b>	<b>11990 mm</b>
<b>B Maximum reach</b>	<b>12310 mm</b>
<b>C Max. digging depth</b>	<b>7030 mm</b>
<b>D Max. digging height</b>	<b>11760 mm</b>
<b>E Max. dumping height</b>	<b>7890 mm</b>
<b>Arm digging force</b>	<b>317 kN</b>
<b>Bucket digging force</b>	<b>430 kN</b>



# CXB HYDRAULIC EXCAVATORS

CX800B

## Versatile performance

Superpower mode provides speed priority when needed, to increase performance and optimise fuel efficiency. Class-leading digging forces ensure maximum productivity in a range of operating conditions.

Automatic high dump mode reduces cycle times while an advanced throttle control combines with the mode selector to provide the operator with total control of the machine.

Heavy duty boom and arm design, with cast boom foot and additional steel plate in stress relief points ensures maximum durability and reliability. Mass excavation dipper arm is constructed of extra thick materials with additional structural reinforcing, to provide long service life and maximum productivity.



## You can count on Case

You can count on Case and your Case dealer for full-service solutions-productive equipment, expert advice, flexible financing, genuine Case parts and fast service. We're here to provide you with the ultimate ownership experience.

### Case pride

You can take pride in the Case name on your machine. It's backed by more than a century of productivity and performance. Case and your Case dealer are here for you, not only when you buy the machine, but also after you put 1,000 or 10,000 hours on it.

### A rich, proud history

Case Construction Equipment's heritage spans more than 165 years. Growing from J.I. Case's innovations with steam-powered machinery in the late 1800s, Case developed road-building equipment that helped create early 20th century streets and highways across the world. By 1912, Case was well on its way to establishing itself as a full-line equipment manufacturer. The company continued to expand its construction equipment business over the next 45 years.

### Celebrating a tradition of innovation

In 1957, Case produced the world's first integrated loader/backhoe made and warranted by one manufacturer. Over the decades and into the 21st century, Case has continued to develop a long line of industry firsts and has taken a leadership role in pioneering new products and solutions. Today, Case produces 15 lines of equipment and more than 90 models to meet your toughest construction challenges. Supported by manufacturing and sales in more than 150 countries, Case serves the needs of our customers worldwide.

### Customer support

Case equipment is sold and serviced by more than 370 dealers and 900 outlets worldwide. No matter where you work, we're here to support and protect your investment.

To locate a Case dealer or learn more about Case equipment or customer service, go to [www.casece.com](http://www.casece.com). For flexible financing options, dependable parts and fast service, your Case dealer is here to meet your needs.

It all adds up. You can count on Case.

## Case Delivers Full-Service Solutions

**EQUIPMENT | FINANCING | PARTS & SERVICE**



# Standard equipment

## ENGINE CONTROL

Isuzu Tier III Engine EU stage IIIA  
Hydraulically driven & reversible cooling fan  
Electronic control of the injection system  
Automatic engine pre-heating  
Automatic/manual engine return to idle  
Exhaust Gas Recirculator  
Emergency stop  
Electrical refuel pump with automatic stop  
Fuel filter with water separator

## HYDRAULIC CONTROL

Auto/Heavy/Super Power working modes  
Pump torque variable control  
Automatic Power boost control  
Boom priority  
Swing brake control  
High performance "Super Fine" synthetic fiber hydraulic filter  
(High contamination catch)  
2 travel speeds with auto down shifting

## OPERATOR ENVIRONMENT

High visibility cab with safety glass  
Adjustable and retractable armrest console with position memory  
Safety lever  
Self adjusting air conditioning and heating system  
Cup holder  
High visibility side monitor display with automatic brightness

Messages (function, temperature, safety, ...) on the display  
Integrated diagnostic system  
Working modes (Auto/Heavy/Super Power) combined with engine throttle  
Anti-theft device  
Hourmeter  
Selectable auxiliary hydraulic flow pre-settings  
RH front console with clock and cell phone holder  
High capacity shock absorbers on cab with 4 points fluid mountings  
Rain deflector  
Windscreen with lockable opening  
Windscreen washer and wiper  
Removable lower front windscreen with storage location in cab  
Glass cab roof window and sliding sun shade  
ISO control pattern low effort & short joysticks  
Adjustable sun visor  
Washable cab floor mat  
Rear view mirror and safety mirrors  
Storage compartments  
Integrated cool box  
12V and 24V DC accessory sockets  
Hammer/Shear change selected from the cab  
Fore & aft adjustment of the whole seat & console

## OPERATOR SEAT

Fully adjustable low frequency mechanical suspension seat including double

acting hydraulic damper  
Weight adjustment  
Height / fore & aft adjustment  
Adjustable head rest  
Adjustable seat back angle with fully flat seat reclining  
Adjustable arm rest  
Safety belt

## ELECTRICAL SYSTEM

Water proof connectors  
Double horn  
2 working lights on the cab  
1 working light on the uppercarriage  
2 working lights on the boom

## UNDERCARRIAGE

Retractable Chassis  
Sealed and long life lubricated tracks  
Track guides

## EQUIPMENT

EMS (Extended Maintenance System) pins and bushings as Standard  
1000 hours lubrication interval for all, except buckets pins at 250 hours)  
Low friction resin side shims on boom and dipper  
Large tool box  
Pre-disposal for the optional cab protection  
Catwalks

# Options

8.40 m standard boom  
7.25 m mass excavation boom  
3.66 m or 4.44 m or 5.62 m dipperstick  
2.98 m mass excavation dipper  
Counterweight removal device  
Hydraulic safety valves on boom and dipper

Bucket/clamshell hydraulic circuit  
Hammer hydraulic circuit  
Hammer/shear hydraulic circuit  
Full length track guide  
Track width 650 mm - 750 mm - 900 mm (depending on the version)

Cab protection FOPS level 2  
Choice of windscreen protections  
GPS (Global Positioning System) by satellite  
Centralized greasing system automatically actuated by an electrical grease pump

*Standard and optional equipment shown can vary by country.*

*Pictures are not contractual.*

## Worldwide Case Construction Equipment Contact Information

### EUROPE/AFRICA/MIDDLE EAST:

Centre D'affaires EGB  
5, Avenue Georges Bataille - BP 40401  
60671 Le Plessis-Belleville - FRANCE

### NORTH AMERICA/MEXICO:

700 State Street  
Racine, WI 53404 U.S.A.

### LATIN AMERICA:

Av. General David Sarnoff 2237  
32210 - 900 Contagem - MG  
Belo Horizonte BRAZIL

### ASIA PACIFIC:

Unit 1 - 1 Foundation Place - Prospect  
New South Wales - 2148 AUSTRALIA

### CHINA:

No. 29, Industrial Premises, No. 376,  
De Bao Road, Waigaoqiao Ftz, Pudong,  
SHANGHAI, 200131, P.R.C.

## CASE Construction Equipment

CNH UK Ltd  
Unit 4,  
Hayfield Lane Business Park,  
Field Lane, Auckland,  
Doncaster,  
DN9 3FL  
Tel. 00800-2273-7373  
Fax +44 1302 802829

**CASE** Customer  
Assistance  
**00800-2273-7373**

The call is free from a land line. Check in advance with your Mobile Operator if you will be charged.



NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 98/37/CE

