


## Dimensions

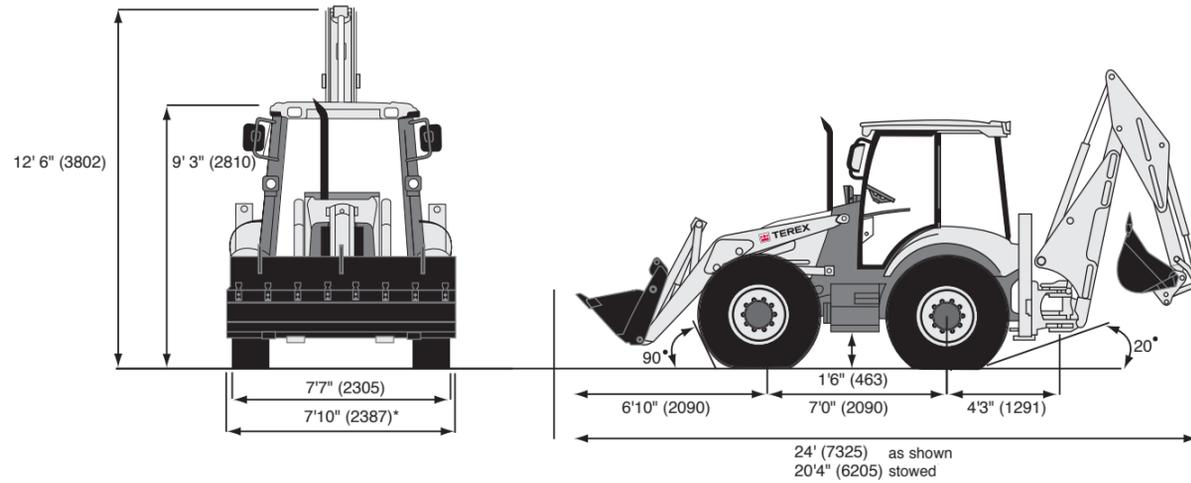

## Specifications

Cab	
Low internal noise level of just 78 dBA	Air re-circulation enables quick warm up on cold days
Large areas of tinted glass allow superb all round visibility	Two front and two rear defrosting vents
Low line curved hood enhances forward visibility	Powerful 3 speed heater supplies a further two forward and three rear vents
Full depth rear window for comprehensive visibility to the trench	Air conditioning option available
In the raised position the rear window provides ventilation yet gives protection from rain	Extensive stowage facilities
Door windows can be partially or fully opened for maximum ventilation	Heavy duty easy to clean rubber floor mat
Cab is ROPS and FOPS approved for operator comfort	Twin externally mounted rear view mirrors
Well laid out controls for ease of operation	Hazard warning and full lighting controls
Touch operated switches for operator convenience	Audible/visual warning covering park brake, transmission oil temp, engine coolant, engine oil pressure, hydraulic oil filter and air cleaner
Instrumentation easy to clean	Visual indication on 4wd engagement, hazard lights, main beam, battery charge, direction indicators and front / rear wipers
Spacious interior giving ample room to the operator at both work stations	Adjustable rear working lights
Wide door opening, self-cleaning steps and large grab rails make access easy	Electronic loader control and mechanical backhoe controls
Adjustable tilt steering wheel to suit all operating styles	
Fully adjustable suspension seat with lap belt maximises operator comfort	

Effective Date: 01 November 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. © 2008 Terex Corporation. Printed on material using 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre from sustainable forests. 970-980 1109-EN

Terex United Kingdom Limited  
Central Boulevard, ProLogis Park, Coventry, England CV6 4BX  
Tel +44 (0) 2476 339400 Fax +44 (0) 2476 339500  
Email enquiries@terexce.com www.terex.co.uk



## BACKHOE LOADER



### 970 ELITE 980 ELITE

Specification	
Operating Weight	7,537 kg
Gross Engine Power	74.5 kW (100 hp)
Dig Depth	4,431 – 5,775 mm

### Benefits

- Engine emission compliant to EU Stage 3A, US EPA Tier 3
- 500 hours service period
- 4 speed powershift gearbox
- High transport speed for reduced highway journey times
- Foot operated differential lock for ease of operation
- High capacity long life sealed wet disc brakes
- Selectable 2 or 4 wheel braking
- Closed centre flow sharing hydraulics
- Cleanable hydraulic oil coolers
- 4 wheel steer, with 3 steering modes

**Specification**

Engine	
Engine Model	1104D-44T
Capacity	269 (4.4) <sup>3</sup> (litr)
Rated Speed	2200 rpm
Gross Power @ 2200 rpm Cert. Rating to UN/ECE R120	74 (100*) kW (hp)
Derived Net Rating @ 2200 rpm to ISO/80/1269/EC	70.3* (94*) kW (hp)
Max Torque @ 1400 rpm UN/ECE R120 ISO 80/1269/EC	392 (289*) Nm (lbfft) 395* (290*) Nm (lbfft)

\*Nominal Non-Certified Values

Transmission		
Tyres	Front:	Rear:
	16.9 x 24	16.9 x 24
Travel Speeds	Forward:	Reverse:
1st	6.2 (3.8) Km/h (mph)	7.3 (4.5) Km/h (mph)
2nd	11.6 (7.2) Km/h (mph)	14.8 (9.2) Km/h (mph)
3rd	21 (13) Km/h (mph)	
4th	39.7 (24.7) Km/h (mph)	

Loader Performance		
	Standard Shovel	7-in1 Shovel
Shovel Breakout	5559 (12256) kgf (lbf)	5390 (11861) kgf (lbf)
Arms Breakout	5264 (11605) kgf (lbf)	4923 (10853) kgf (lbf)
Lift Capacity To Full Height	3959 (8728) kg (lb)	3563 (7855) kg (lb)

Loader Attachments		
	Standard Shovel	7-in1 Shovel
Width	2387 (7' 10") mm (ft)	2387 (7' 10") mm (ft)
Capacity	1.2 (1.56) m <sup>3</sup> (yd <sup>3</sup> )	1.2 (1.56) m <sup>3</sup> (yd <sup>3</sup> )
Weight	430 (946) kg (lb)	767 (1687) kg (lb)

Backhoe Attachments			
Attachments	Width	Capacity	Weight
Trench Bkts	12in (305mm)	2.94ft <sup>3</sup> (83ltrs)	207lb (94kg)
	18in (450mm)	4.37ft <sup>3</sup> (124ltrs)	247lb (112kg)
	24in (600mm)	6.51ft <sup>3</sup> (184ltrs)	295lb (134kg)
	24in (600mm)	8.22ft <sup>3</sup> (233ltrs)	295lb (143kg)
	30in (750mm)	8.74ft <sup>3</sup> (248ltrs)	342lb (155kg)
	36in (900mm)	11.03ft <sup>3</sup> (312ltrs)	390lb (177kg)
Ditch cleaning	60in (1525mm)	8.0ft <sup>3</sup> (220ltrs)	320lb (145kg)
	72in (1830mm)	10.0ft <sup>3</sup> (300ltrs)	388lb (176kg)
Sq hole bucket	36in (900mm)	4.41ft <sup>3</sup> (125ltrs)	353lb (160kg)

Backhoe Performance			
	Standard Dipper	Deep Dig Dipper	
		Ret	Ext
Slew Torque	16100 (11875) Nm (lbfft)	16100 (11875) Nm (lbfft)	16100 (11875) Nm (lbfft)
Dipper Tearout	3946 (8670) kgf (lbf)	3946 (8670) kgf (lbf)	2644 (5829) kgf (lbf)
Bucket Tearout	5260 (11596) kgf (lbf)	5260 (11596) kgf (lbf)	5260 (11596) kgf (lbf)
Hydraulic Lift Capacity (Including Bucket)	1564 (3448) kg (lb)	1297 (2859) kg (lb)	918 (2024) kg (lb)

Total Machine Weight	
Total Machine Weight	16581 (7537) lb (kg)
<i>Add/Delete</i>	
7 in 1 Multi - Purpose	+741 (337) lb (kg)
7 in 1 Multi - Purpose Fork Kit	+336 (153) lb (kg)
Deep Dig Dipper	+477 (217) lb (kg)

Axles and Brakes	
Outboard planetary final drives for easier servicing.	
Foot operated hydraulically actuated differential lock.	
16° front axle oscillation to maintain maximum ground contact and traction.	
Self-equalizing and self adjusting.	
Independent brake operation.	
Selectable 2 or 4 wheel braking.	


Hydraulics	
Main Pump @ 2200 rpm	17.7/80 gpm (lpm)
Secondary Pump @ 2200 rpm	17.7/80 gpm (lpm)
System Main Relief Setting @ 2200 rpm	3250/225 psi (bar)
Unloader Settings @ 2200 rpm	3000/207 psi (bar)
Combined flow	160 l/min

Electrics	
12 volt system	
Battery step mounted for good access	
Low maintenance battery	
100 A alternator	
Connectors sealed against water and dust	
33 circuit fuses	
25 circuit relays	
Battery isolator	

Forks	
Fork Length	1067 (3' 6") mm (ft)
Section Width	80 (3") mm (ins)
Assembly Weight	153 (336) kg (lb)
Max. Operating Height	3199 (10' 6") mm (ft)
Reach at Ground Level	2660 (8' 9") mm (ft)
Reach at Full Height	2251 (7' 5") mm (ft)
S.W.L. At 500mm Load Centre	1000 (2204) kg (lb)

Turning Circles		
	Over Tyres	Over Bucket
2 Wheel Steer	11.4 (37' 4") m (ft)	13.1 (43') m (ft)
4 Wheel Steer	7.3 (23' 9") m (ft)	9.3 (30' 5") m (ft)
With Brakes	6.7 (22') m (ft)	8.8 (28' 9") m (ft)

Depending on tyre size

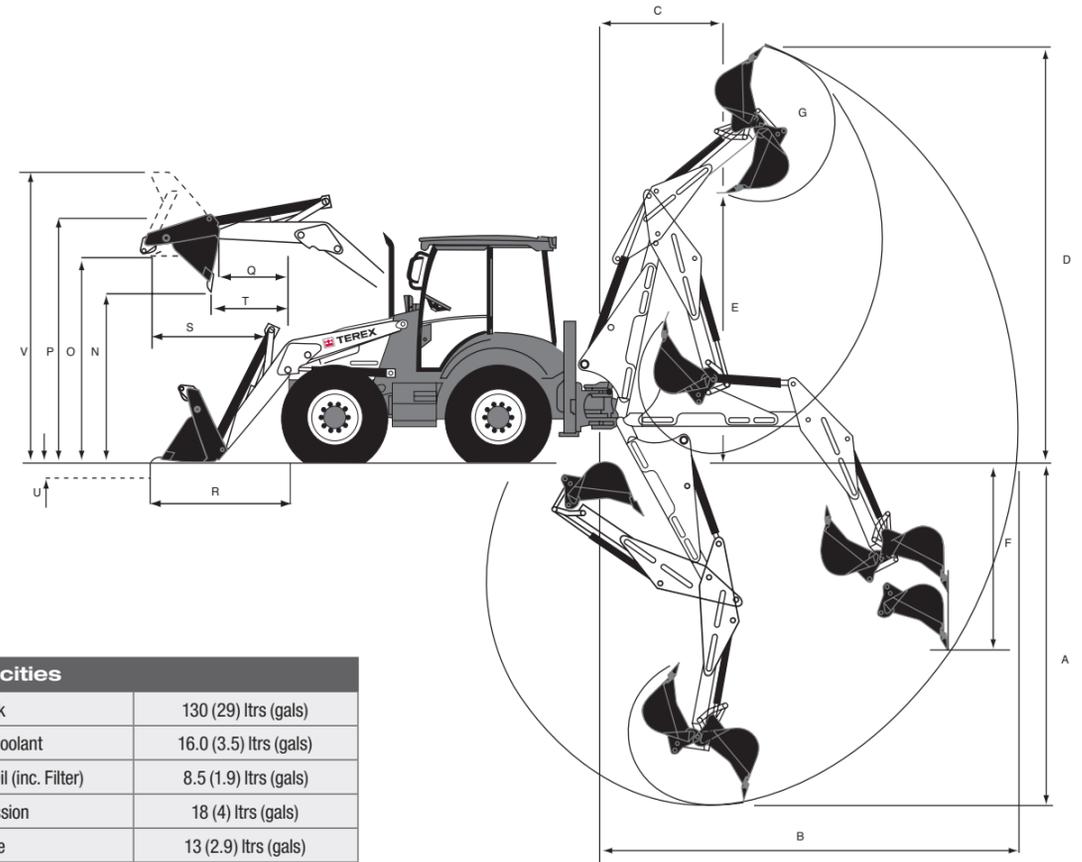**Working Ranges**


Capacities	
Fuel Tank	130 (29) ltrs (gals)
Engine Coolant	16.0 (3.5) ltrs (gals)
Engine Oil (inc. Filter)	8.5 (1.9) ltrs (gals)
Transmission	18 (4) ltrs (gals)
Rear Axle	13 (2.9) ltrs (gals)
Front Axle	12 (2.6) ltrs (gals)
Hydraulic System	143 (31.7) ltrs (gals)

Backhoe Dimensions			
	Standard Dipper	Deep Dig Dipper	
		Ret	Ext
<b>A</b> Dig Depth - Maximum SAE 2ft Flat Bottom SAE	4431 (14' 6") mm (ft) 4415 (14' 5") mm (ft)	4431 (14' 6") mm (ft) 4415 (14' 5") mm (ft)	5775 (18' 11") mm (ft) 5764 (18' 11") mm (ft)
<b>B</b> Reach - Ground Level to Slew	5725 (18' 9") mm (ft)	5725 (18' 9") mm (ft)	7016 (23') mm (ft)
<b>C</b> Loading Reach	1996 (6' 7") mm (ft)	1996 (6' 7") mm (ft)	2924 (9' 7") mm (ft)
<b>D</b> Operating Height	5699 (18' 8") mm (ft)	5699 (18' 8") mm (ft)	5699 (18' 8") mm (ft)
<b>E</b> Loading Height SAE Max Load Height	3593 (11' 9") mm (ft) 3911 (12' 10") mm (ft)	3593 (11' 9") mm (ft) 3911 (12' 10") mm (ft)	4571 (15') mm (ft) 4889 (16' 1") mm (ft)
<b>F</b> Maximum Straight Wall Dig Depth	2562 (8' 5") mm (ft)	2562 (8' 5") mm (ft)	3951 (13') mm (ft)
<b>G</b> Bucket - Rotation	194°	194°	194°
Total Side Shift	1286 (4' 3")	1286 (4' 3")	1286 (4' 3")
Stabiliser Spread	2115 (6' 11")	2115 (6' 11")	2115 (6' 11")
Max Levelling Angle	8°	8°	8°

Loader Dimensions		
	Standard 7 Shovel	7-in-1 Shovel
<b>N</b> Dump Clearance at 45° Dump Height (Fully Dumped)	2748 (9') mm (ft) 2669 (8' 9") mm (ft)	2748 (9') mm (ft) 2669 (8' 9") mm (ft)
<b>O</b> Loadover Height	3350 (11') mm (ft)	3350 (11') mm (ft)
<b>P</b> Hinge Pin Height	3590 (11' 9") mm (ft)	3590 (11' 9") mm (ft)
<b>Q</b> Pin Forward Reach	352 (1' 2") mm (ft)	352 (1' 2") mm (ft)
<b>R</b> Reach at Ground	1582 (5' 2") mm (ft)	1582 (5' 2") mm (ft)
<b>S</b> Max. Reach at Full Height	1282 (4' 3") mm (ft)	1282 (4' 3") mm (ft)
<b>T</b> Reach at Full Height- 45° Reach at Full Height- Fully Dumped	829 (2' 9") mm (ft) 645 (2' 1") mm (ft)	829 (2' 9") mm (ft) 645 (2' 1") mm (ft)
<b>U</b> Dig Depth Rollback at Ground Max Dump Angle	116 (5") mm (in) 45° 57°	116 (5") mm (in) 45° 57°
<b>U</b> Overall Operating Height	4338 (14' 3") mm (ft)	4388 (14' 5") mm (ft)