

- High power, high torque, emission-certified engine for maximum performance
- Automatic transmission with manual over-ride for optimum shifting
- Automatic limited slip differentials in each axle for superior traction
- Refined, quiet cab for greater operator comfort
- Maximum Payload - 25 tonne (27.5 US ton)
- Heaped Capacity - 15.5m³ (20.3 yd³)
- Gross Power - 246 kW (330 hp)

FRAME

Front and rear frames are all-welded high grade steel fabrications with rectangular box-section beams forming the main side and cross members. Inter-frame oscillation is provided by a large diameter cylindrical coupling which houses nylon bushings. Frames articulate 45° to either side for steering by means of two widely-spaced pivot pins in back-to-back sealed taper roller bearings.

ENGINE

Make/ModelCummins QSL 9

Type....Four cycle, emission certified, direct injection diesel, 6 cylinder, in line, water-cooled, turbocharged with air to air charge cooling, water cooled.

Piston Displacement8.9 litres (543 in³)

Bore x Stroke114 x 144 mm (4.49 x 5.69 in)

Gross Power at 2100 rev/min246 kW
.....(330 hp, 335 PS)

Net Power at 2100 rev/min ..234 kW(314 hp, 318 PS)

Maximum Torque1532 Nm (1 130 lbf ft)
.....at 1400 rev/min

Gross Power rated to SAE J1995 Jun 90.

Engine emission meets USA EPA Tier 2 /CARB MOH 40 CFR 89 Tier 2 and proposed EUNRMM (non-road mobile machinery directive) Tier 2.

24 volt electric start. 70A alternator. Two 12 volt 175 Ah batteries.

Dry-type air cleaner with safety element, automatic dust ejector and restriction indicator.

Modulating fan reduces noise level and consumes engine power only when required.

TRANSMISSION

ZF 6WG 260 RPC Fully automatic transmission with manual override.

The transmission assembly consists of a torque converter close-coupled to a countershaft type gearbox with integral output transfer gearing. Automatic shifting throughout the range, with kick-down feature. Lockup in all forward gears. A torque-proportioning output differential transmits drive permanently to front and rear axles. This differential may be locked by the driver for use in difficult traction conditions.

	Forward						Reverse		
Gear	1	2	3	4	5	6	1	2	3
km/h	5.6	8.7	13.6	21.1	31.0	51.0	5.6	13.6	31.0
mile/h	3.5	5.4	8.5	13.1	19.3	31.7	3.5	8.5	19.3

AXLES

Three axles in permanent all-wheel drive (6 x 6) with differential coupling between each axle to prevent driveline wind-up. Heavy duty axles with fully-floating axle shafts and outboard planetary reduction gearing.

Automatic limited slip differentials in each axle. Leading rear axle incorporates a through-drive differential to transmit drive to the rearmost axle. This differential and the transmission output differential are locked simultaneously using one switch selected by the driver.

Differential ratio3.44:1

Planetary reduction6.35:1

Overall Drivetrain reduction21.85:1

TYRES AND WHEELS

Tyres: Standard 23.5 R 25 two star radial. Optional 750/65 R25

Rims: Standard 25 x 19.50. For optional tyre, 25 x 22.00

Wheels: .5-piece earthmover rims with 12 stud fixing

SUSPENSION

Front: Axle is carried on the leading arms of a sub-frame which pivots on the main frame. Suspension by rubber elements with four heavy duty hydraulic dampers.

Rear: Each axle is coupled to the frame by three rubber-bushed links with lateral restraint by a transverse link. Pivoting inter-axle balance beams equalise load on each rear axle. Suspension movement is cushioned by rubber/ metal laminated compression units between each axle and underside of balance beam ends.

Pivot points on leading and trailing links are rubber-bushed and maintenance-free.

BRAKES

All hydraulic braking system with dry disc on each wheel and double heavy-duty calipers per disc. Independent circuits for front and rear brake systems.

Parking: Spring-applied, hydraulic-released disc on rear driveline.

Secondary: Secondary brake control actuates service and parking brakes.

Brake system conforms to ISO 3450, SAE J1473.

Retardation: Guillotine-type engine exhaust brake is standard and operates automatically should engine approach overspeed condition.

STEERING

Hydrostatic power steering by two double-acting cushioned steering cylinders with pressure supplied by a variable displacement / load sensing piston pump. Secondary steering pressure is provided by a ground driven pump mounted on the transmission. An audible alarm and warning light indicates should the secondary system activate.

System conforms to ISO 5010, SAE J53

Steering components are protected by full flow filtration on the return line.

Steering angle to either side.....45°

Lock to lock turns, steering wheel.....4

System pressure.....241 bar (3 500 lbf/in²)

HOIST

Two single-stage, double-acting hoist cylinders, cushioned at both ends of stroke. Variable displacement / load sensing piston pump driven from power take-off on transmission. Full flow return line filtration. Full electro-hydraulic hoist control, with electronic detent in power down.

System pressure.....220 bar (3 200 lbf/in²)

Pump output flow rate 4.9 litre/sec (77.6 US gal/min)

Raise time, loaded 12 sec. Power down 7.5 sec.

BODY

All welded construction, fabricated from high hardness (min. 360 BHN) 1 000 MPa (145 000 lbf/in²) yield strength steel.

Dual slope tailchute improves material ejection from body.

Plate thicknesses:Floor and tailchute 14 mm
..... (0.55 in)

Sides12 mm (0.47 in)

Front.....8 mm (0.31 in)

Volume: Struck (SAE)12.5 m³ (16.4 yd³)

Heaped 2:1 (SAE).....15.5 m³ (20.3 yd³)

STANDARD EQUIPMENT

<p>Cab:</p> <ul style="list-style-type: none"> Air Conditioner 8kW Cigar Lighter, 24v Coathook Engine Diagnostic Facility Heater and Demister 9.5kW Hydraulic Diagnostic Facility RS232 Inspection Lamp Socket, 24v Insulation, Thermal and Acoustic Interior Light Mirrors, Rear View, 4 Mug Holder Radio/Cassette Seat, Passenger ROPS/FOPS Protection <ul style="list-style-type: none"> ISO 3471/3449 SAE J1040 Apr 88/J231 Seat Belts, Retractable J386 Seat, Operator, air suspension Steering Wheel, tilt / telescopic Storage Compartment Sun Blind Tinted Glass Transmission Visual Display Unit Window Protection Grille, rear Wiper and Washer, <ul style="list-style-type: none"> front and rear windows <p>Gauges:</p> <ul style="list-style-type: none"> Fuel Level Hourmeter Speedometer/Odometer Tachometer 	<ul style="list-style-type: none"> Transmission Temperature Water Temperature <p>Indicator Lights:</p> <ul style="list-style-type: none"> Turn Signals Headlight High Beam <p>Audible Alarm:</p> <ul style="list-style-type: none"> Brakes Tractor, Low Pressure Brakes Trailer, Low Pressure Engine Stop Transmission stop Steering, Low Pressure <p>Warning Lights:</p> <ul style="list-style-type: none"> Alternator Charging Body Up Brake Pressure - Front and Rear Engine Check Engine 'Stop' Fuel, Low Level Diff. Locks 'On' Maintenance (Engine) Parking Brake 'On' Steering Pressure Transmission 'Stop' <p>General:</p> <ul style="list-style-type: none"> Air Filter, Dual Element with Restriction Indicator Articulation Locking Bar and Oscillation Lock Pin Battery Master Switch 	<ul style="list-style-type: none"> Body Prop Brake Splash Guards Diagnostic Test Points Downshift Inhibitor Engine Underguard, hinged Fan, Modulating Headlamp Guards Horn, Electronic <p>Lights:</p> <ul style="list-style-type: none"> Headlamps, 4, Halogen. Side, Tail, Stop, Reverse. Hazard Warning and Direction Indicators Work Lights, roof-mounted <ul style="list-style-type: none"> Light Guards, Rear Mudflaps, Front Neutral Start Interlock Pivot Protection Guard Reverse Alarm, audible J994 Servo Body Hoist Security Kit Tow Points, front and rear Transmission Oil Cooler, with Modulating Fan Transmission Sump Guard Tyre Inflation, nitrogen (6 tyres)
---	--	--

OPTIONAL EQUIPMENT

<p>Body Options:</p> <ul style="list-style-type: none"> Exhaust Heating Liner Plates Side Extensions Spillguard Extension Tailgate–Scissor chain operated Tailgate–Underhinged <p>Cold Start Kit</p> <ul style="list-style-type: none"> Engine Brakes (Jacobs) Fast Fuel Adaptor Fire Extinguisher 	<ul style="list-style-type: none"> First Aid Kit <p>Lights:</p> <ul style="list-style-type: none"> Beacon, flashing Fog, rear Reverse, flashing Working, rear facing <ul style="list-style-type: none"> Mirror, front mounted Mirror, Safety (with wide angle) Mirrors, heated Mud Flaps, in front of leading rear wheels 	<ul style="list-style-type: none"> Parking Brake Guard Retarder, transmission Seat heated Television Monitor, rear view Tool Kit, Hand Tyres, 750/65 R25
---	---	--

SERVICE DATA



Fuel Tank390 litres (103.0 US gal)	Transmission (inc filters and cooler)54 litres (14.3 US gal)
Hydraulic System (steering & body)202 litres (53.4 US gal)	Differentials - Front & Rear (each).....17 litres (4.5 US gal)
Engine Crankcase20 litres (5.3 US gal)	Differential - Centre.....18.5 litres (4.9 US gal)
Cooling System.....55 litres (14.5 US gal)	Planetaries (each).....3 litres (0.8 US gal)







Performance Data

Unit equipped with 23.5 R 25 tyres

Graphs based on 2% Rolling Resistance

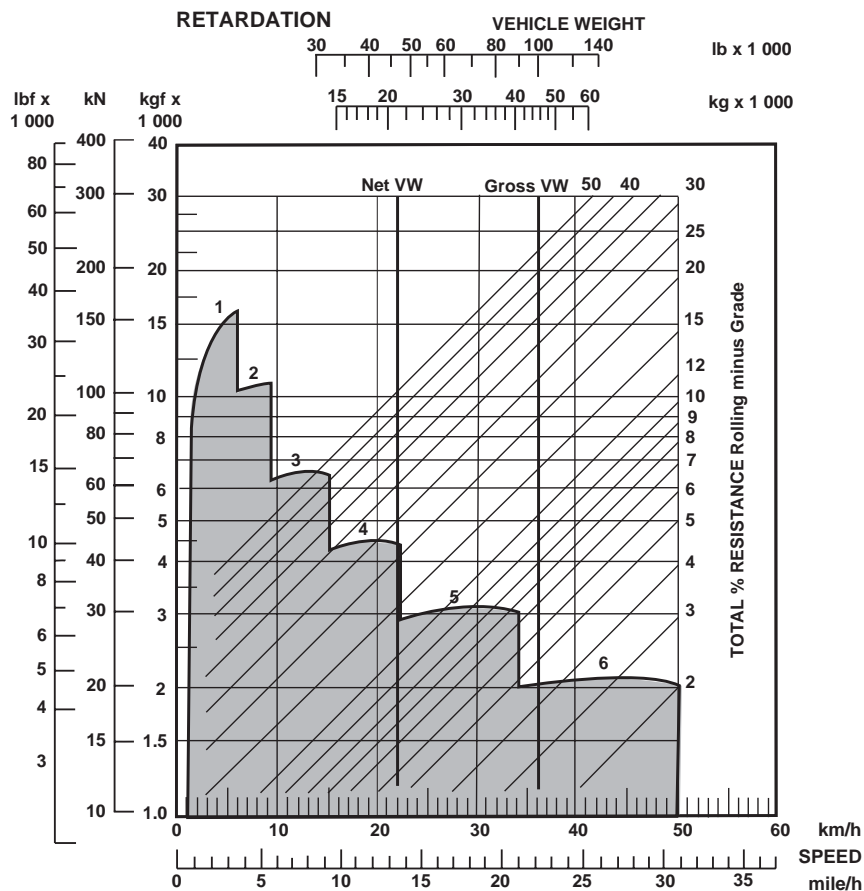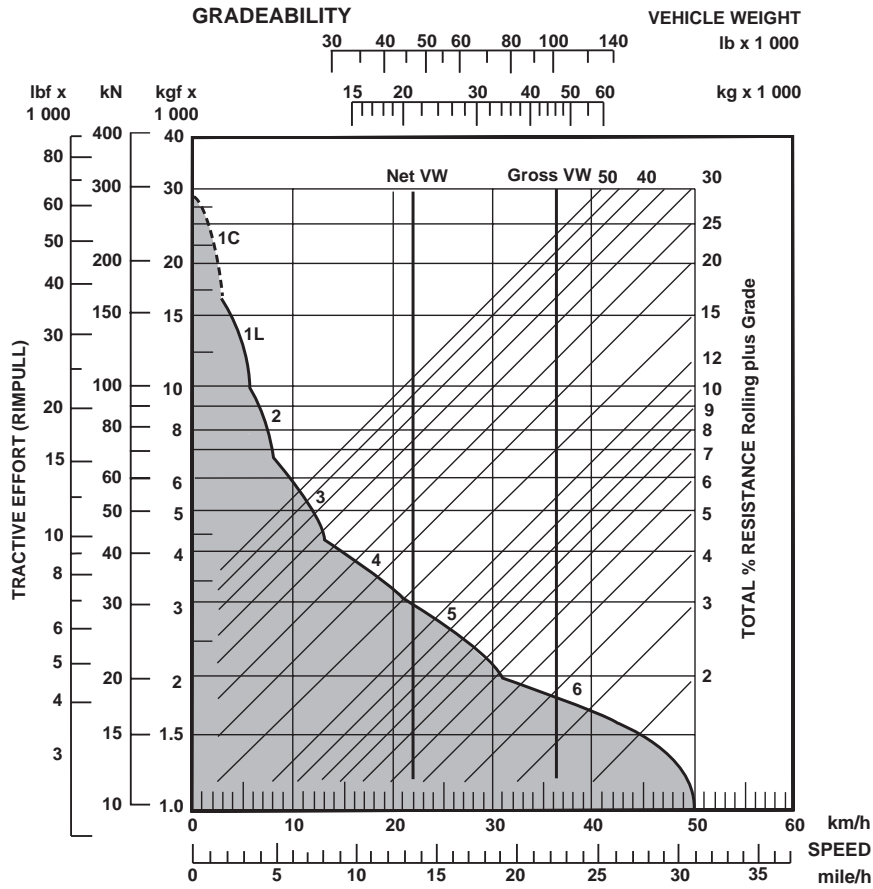

Instructions: From intersection of Vehicle Weight with Percentage Resistance line read across to determine maximum Gear attainable, and then downwards for Speed.

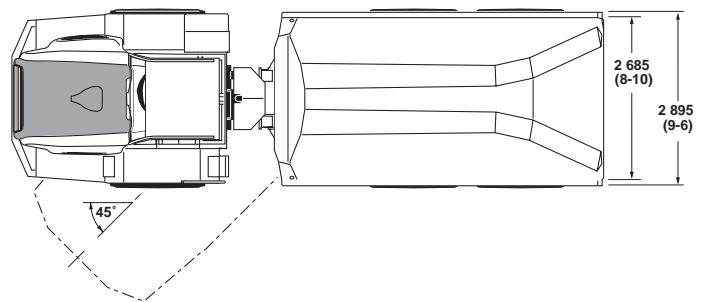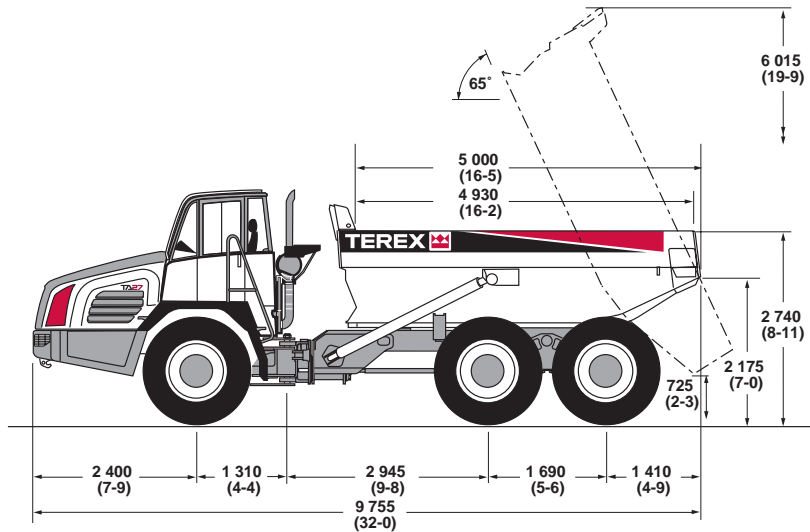

WEIGHTS

Standard unit	kg	lb
Net Distribution		
Front Axle	11 450	25 240
Bogie Axle Leading	5 190	11 400
Bogie Axle Trailing	5 280	11 640
Vehicle, Net	21 900	48 280
Payload	25 000	55 115
Gross Distribution		
Front Axle	15 620	34 435
Bogie Axle Leading	15 570	34 325
Bogie Axle Trailing	15 710	34 635
Vehicle Gross	46 900	103 395
Bare Chassis	17 270	38 070
Body	4 100	9 040
Hoists, pair	530	1 170

DISTRIBUTOR:



Terex Equipment Limited

Motherwell, Scotland ML1 5RY Tel: 01698 732 121 Fax: 01698 734 046

www.terex.com