


SL 4840



Dimensions		SL 4840
A	Overall operation height-fully raised	3.818 mm
B	Height of hinge pin-fully raised	2.967 mm
C	Overall height	2.025 mm
D	Ground Clearance	224 mm
E	Overall length (with bucket)	3.208 mm
F	Overall length (less bucket)	2.370 mm
G	Wheel base	1.054 mm
H	Dump reach	701 mm
I	Rollback at ground	27°
J	Dump angle	40°
K	Overall width	12.00x16,5=1.690 mm
L	Bucket width	1.730 mm
M	Clearance circle-rear	1.448 mm
N	Clearance circle-front (less bucket)	1.194 mm
O	Clearance circle-front (with bucket)	2.019 mm
P	Seat to ground height	986 mm
Q	Rollback at full height	86°
R	Dump height	2.276 mm
S	Departure angle	28°

Gehlmax Nederland b.v.
 Bruningsstraat 1-3
 4251 LA WERKENDAM
 Tel. 0183 -502311

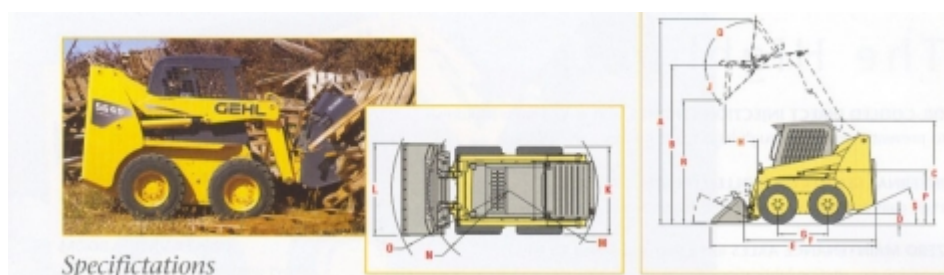

Machine	SL 4840
Operating weight	2.939 kg
Tip capacity	1.542 kg / 1.678 kg
Operating capacity	771 kg / 839 kg
Breakout force	2.064 kg
Hydraulic	SL 4840
Loader circuit pump	72 / 114 l/min
Loader circuit pressure	190 / 172 bar
Hydraulic reservoir	45 litre
Max. travel speed	0 – 13 km/h
2-Speed-optional-	0 – 18 km/h
Standard buckets- width/volume	SL 4840
Standard bucket	1.730 mm / 0,43 m ³
Utility bucket	1.730 mm / 0,59 m ³
Lightmaterial bucket	1.730 mm / 0,62 m ³
Engine	SL 4840
Manufacturer	Deutz
Diesel	F4M2011
Power output max.	60 HP / 45 KW
At rpm	2.500 rpm
Cylinder / displacement	4/3.100 cm ³
Fuel capacity	56 litre