


# SL 5640



Dimensions		SL 5640
A	Overall operation height-fully raised	4.115 mm
B	Height of hinge pin-fully raised	3.124 mm
C	Overall height	2.057 mm
D	Ground Clearance	203 mm
E	Overall length (with bucket)	3.327 mm
F	Overall length (less bucket)	2.426 mm
G	Wheel base	1.080 mm
H	Dump reach	833 mm
I	Rollback at ground	30°
J	Dump angle	40°
K	Overall width	12.00x16,5=1.702 mm
L	Bucket width	1.730 mm
M	Clearance circle-rear	1.679 mm
N	Clearance circle-front (less bucket)	1.283 mm
O	Clearance circle-front (with bucket)	2.083 mm
P	Seat to ground height	1.067 mm
Q	Rollback at full height	84°
R	Dump height	2.375 mm
S	Departure angle	26°

Gehlmax Nederland b.v.  
 Bruningsstraat 1-3  
 4251 LA WERKENDAM  
 Tel. 0183 -502311

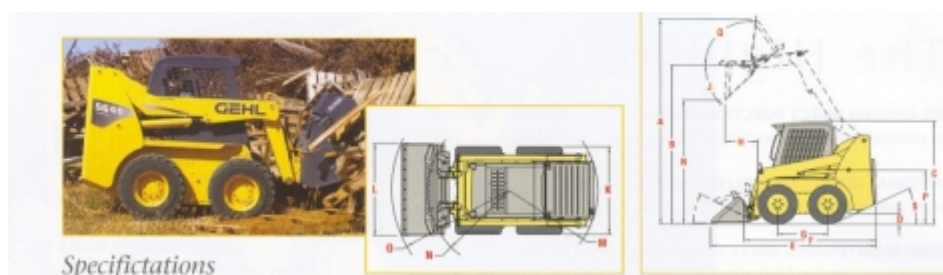

<b>Machine</b>	<b>SL 5640</b>
Operating weight	3.348 kg
Tip capacity	1.814 kg / 2.086 kg
Operating capacity	907 kg / 1.043 kg
Breakout force	2.676 kg
<b>Hydraulic</b>	<b>SL 5640</b>
Loader circuit pump	87 / 136 l/min
Loader circuit pressure	206 / 200 bar
Hydraulic reservoir	61 litre
Max. travel speed	0 – 13,5 km/h
2-Speed-optional-	0 – 20,0 km/h
<b>Standard buckets- width/volume</b>	<b>SL 5640</b>
Standard bucket	1.730 mm / 0,54 m <sup>3</sup>
Utility bucket	1.730 mm / 0,72 m <sup>3</sup>
Lightmaterial bucket	1.730 mm / 0,81 m <sup>3</sup>
<b>Engine</b>	<b>SL 5640</b>
Manufacturer	Deutz Turbo
Diesel	BF4M2011
Power output max.	82 HP / 61 KW
At rpm	2.500 rpm
Cylinder / displacement	4/3.100 cm <sup>3</sup>
Fuel capacity	72 litre