


SL 6640

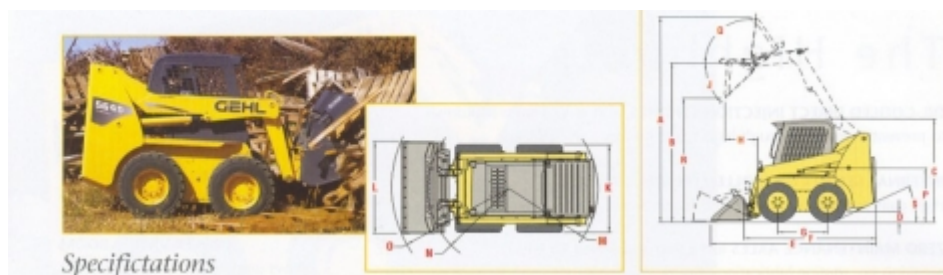

Dimensions		SL 6640
A	Overall operation height-fully raised	4.275 mm
B	Height of hinge pin-fully raised	3.157 mm
C	Overall height	2.083 mm
D	Ground Clearance	231 mm
E	Overall length (with bucket)	3.594 mm
F	Overall length (less bucket)	2.565 mm
G	Wheel base	1.229 mm
H	Dump reach	871 mm
I	Rollback at ground	30°
J	Dump angle	40°
K	Overall width	12.00x16,5=1.841 mm
L	Bucket width	1.880 mm
M	Clearance circle-rear	1.753 mm
N	Clearance circle-front (less bucket)	1.372 mm
O	Clearance circle-front (with bucket)	2.299 mm
P	Seat to ground height	1.100 mm
Q	Rollback at full height	84°
R	Dump height	2.408 mm
S	Departure angle	29°

Machine	SL 6640
Operating weight	3.538 kg
Tip capacity	2.187 kg / 2.450 kg
Operating capacity	1.089 kg / 1.225 kg
Breakout force	2.676 kg
Hydraulic	SL 6640
Loader circuit pump	87 / 136 l/min
Loader circuit pressure	206 / 200 bar
Hydraulic reservoir	61 litre
Max. travel speed	0 – 13,5 km/h
2-Speed-optional-	0 – 20,0 km/h
Standard buckets- width/volume	SL 6640
Standard bucket	1.730 mm / 0,54 m ³
Utility bucket	1.830 mm / 0,77 m ³
Lightmaterial bucket	1.830 mm / 0,89 m ³
Engine	SL 6640
Manufacturer	Deutz Turbo
Diesel	BF4M2011
Power output max.	82 HP / 61 KW
At rpm	2.500 rpm
Cylinder / displacement	4/3.100 cm ³
Fuel capacity	91 litre