


# SL 7710

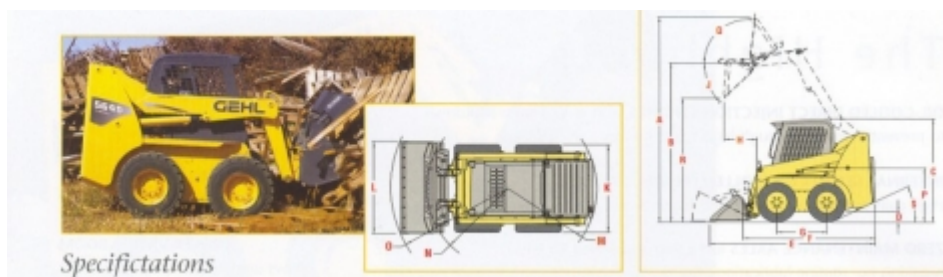

Dimensions		SL 7710
A	Overall operation height-fully raised	4.770 mm
B	Height of hinge pin-fully raised	3.607 mm
C	Overall height	2.057 mm
D	Ground Clearance	231 mm
E	Overall length (with bucket)	4.089 mm
F	Overall length (less bucket)	3.099 mm
G	Wheel base	1.397 mm
H	Dump reach	970 mm
I	Rollback at ground	28,5°
J	Dump angle	38°
K	Overall width	14.00x17,5=2.057 mm
L	Bucket width	2.140 mm
M	Clearance circle-rear	2.045 mm
N	Clearance circle-front (less bucket)	1.539 mm
O	Clearance circle-front (with bucket)	2.583 mm
P	Seat to ground height	1.041 mm
Q	Rollback at full height	85°
R	Dump height	2.718 mm
S	Departure angle	21°

<b>Machine</b>	<b>SL 7710</b>
Operating weight	4.654 kg
Tip capacity	3.610 kg
Operating capacity	1.805 kg
Breakout force	3.574 kg
<b>Hydraulic</b>	<b>SL 7710</b>
Loader circuit pump	110 / 151 l/min
Loader circuit pressure	228 / 214 bar
Hydraulic reservoir	57 litre
Max. travel speed	0 – 12,7 km/h
2-Speed-optional-	0 – 20,0 km/h
<b>Standard buckets- width/volume</b>	<b>SL 7710</b>
Standard bucket	2.140 mm / 0,89 m <sup>3</sup>
Utility bucket	2.140 mm / 1,06 m <sup>3</sup>
Lightmaterial bucket	2.200 mm / 1,29 m <sup>3</sup>
<b>Engine</b>	<b>SL 7710</b>
Manufacturer	Perkins Turbo
Diesel	1104C-44
Power output max.	99 HP / 73,8 KW
At rpm	2.400 rpm
Cylinder / displacement	4/4.400 cm <sup>3</sup>
Fuel capacity	109,3 litre