


# SL 4240



<b>Dimensions</b>		<b>SL 4240</b>
A	Overall operation height-fully raised	3.584 mm
B	Height of hinge pin-fully raised	2.794 mm
C	Overall height	1.826 mm
D	Ground Clearance	211 mm
E	Overall length (with bucket)	2.952 mm
F	Overall length (less bucket)	2.314 mm
G	Wheel base	932 mm
H	Dump reach	574 mm
I	Rollback at ground	29°
J	Dump angle	42°
K	Overall width	10.00x16,5=1.485 mm
L	Bucket width	1.520 mm
M	Clearance circle-rear	1.484 mm
N	Clearance circle-front (less bucket)	1.102 mm
O	Clearance circle-front (with bucket)	1.758 mm
P	Seat to ground height	853 mm
Q	Rollback at full height	99°
R	Dump height	2.197 mm
S	Departure angle	

Gehlmax Nederland b.v.  
 Bruningsstraat 1-3  
 4251 LA WERKENDAM  
 Tel. 0183 -502311

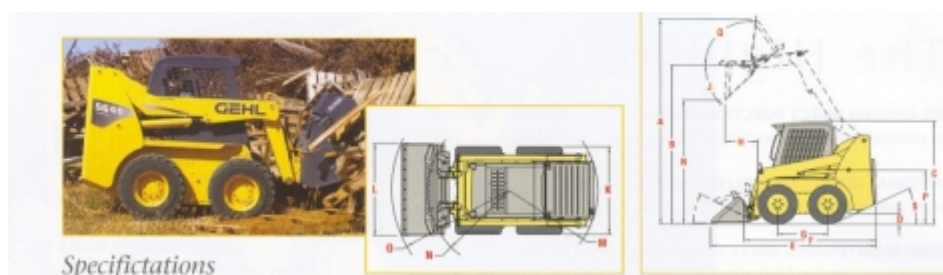

<b>Machine</b>	<b>SL 4240</b>
Operating weight	2.096 kg
Tip capacity	1.340 kg
Operating capacity	670 kg
Breakout force	1.270 kg
<b>Hydraulic</b>	<b>SL 4240</b>
Loader circuit pump	58 l/min
Loader circuit pressure	190 bar
Hydraulic reservoir	38 litre
Max. travel speed	0 – 10,9 km/h
2-Speed-optional-	no
<b>Standard buckets- width/volume</b>	<b>SL 4240</b>
Standard bucket	1.520 mm / 0,31 m <sup>3</sup>
Utility bucket	1.520 mm / 0,40 m <sup>3</sup>
Lightmaterial bucket	1.520 mm / 0,48 m <sup>3</sup>
<b>Engine</b>	<b>SL 4240</b>
Manufacturer	Yanmar
Diesel	4TNV88
Power output max.	46 HP / 34 KW
At rpm	2.500 rpm
Cylinder / displacement	4/2.190 cm <sup>3</sup>
Fuel capacity	47 litre