



SKID STEER LOADERS

2041



BREAKTHROUGH THE CONFINES

SPECIFICATIONS



MOVE MORE ▲ with an increased rated operating capacity of 1,475 lbs. with optional counterweight adds strength to your compact fleet.



UNIQUE ▲ patented Mustang radial-lift design is engineered for fast cycle times, strong breakout forces and high operating capacities.

HIGH LIFT HEIGHT ▲ up to 100 inches makes loading and material handling in small, confined spaces easy.




DRIVE MOTORS ▲ utilize SAHR (spring applied, hydraulic release) brakes as standard equipment; Activated by the Hydraloc® system or a switch on the instrument panel.



STURDY ▲ Level II-certified ROPS/FOPS structure provides protection, yet allows an unobstructed view to the attachment and surrounding work area.

		2041
DIMENSIONS	A. Overall Operating Height - Fully Raised (mm)	141.1" (3584)
	B. Height to Hinge Pin - Fully Raised (mm)	110" (2794)
	C. Overall Height to Top of ROPS (mm)	71.9" (1826)
	D. Ground Clearance to Chassis (mm)	8.3" (211)
	E. Overall Length with Bucket (mm)	116.2" (2952)
	F. Overall Length without Bucket (mm)	91.1" (2314)
	G. Wheelbase (mm)	36.7" (932)
	H. Dump Reach at Full Height (mm)	22.6" (574)
	I. Bucket Rollback at Ground	29°
	J. Dump Angle	42°
	K. Overall Width (mm)	53" (1346)
	L. Bucket Width (mm)	55.3" (1404)
	M. Clearance Circle - Rear (mm)	58.4" (1484)
	N. Clearance Circle - Front without Bucket (mm)	43.4" (1102)
	O. Clearance Circle - Front with Bucket (mm)	69.2" (1758)
	P. Seat to Ground Height (mm)	33.6" (853)
	Q. Rollback at Full Height	99°
R. Dump Height (mm)	86.5" (2197)	
S. Departure Angle	29°	
Standard Specification Tire Size		10.00 x 16.5 HD
ENGINE	Make	Yanmar
	Model	4TNV88 - Interim Tier IV
	Power (kW) @ rpm	46 hp (34.2) @ 2600
	Displacement (L)	134 cu.in. (2.2)
	Maximum Torque (Nm) @ rpm	106 ft.-lbs. (145) @ 1680
HYDRAULIC SYSTEM	Auxiliary Hydraulics - Standard (L/min)	16.5 gpm (62)
	System Relief Pressure (bar)	2750 psi (190)
	Reservoir Capacity (L)	8 gal. (30.3)
CAPACITIES / WEIGHT	Rated Operating Capacity ^A (kg)	1350 lbs. (612)
	With Optional Counterweight ^A (kg)	1475 lbs. (669)
	Tipping Load (kg)	2700 lbs. (1225)
	Fuel Tank (L)	12.4 gal. (47)
	Travel Speed - Maximum (km/hr)	5.4 mph (8.7)
	Operating Weight ^B - Approximate (kg)	4600 lbs. (2087)

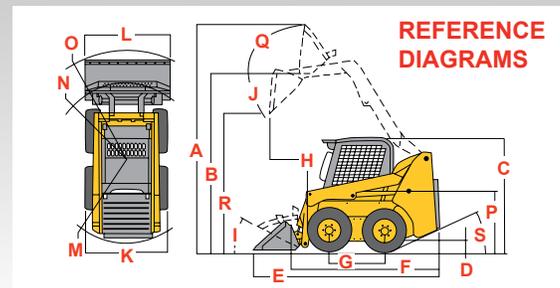

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank



For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

1-800-628-0491

or visit mustangmfg.com

West Bend, WI USA
Tel: 262-334-9461
Fax: 262-338-7517