



SKID STEER LOADERS

2056 SERIES II



RAW POWER & MANEUVERABILITY



HIGH-REACHING ▲ radial-lift design reaches heights up to 122 inches with 12.00 tires.



WORK HARDER ▲ with a rated operating capacity of 1,900 pounds, or 2,050 pounds with optional counterweight.



POWERFUL ▲ 68-hp Interim Tier IV-certified diesel engine, means this machine provides extra strength when needed.




FAST SERVICE ▲ is achieved with the tilt-back ROPS and large engine cover that exposes internal components quickly for easy maintenance.

GET IN CONTROL ▲ with three control options: Joystick, Hand-foot, and Dual-hand controls available with standard or optional high-flow auxiliary hydraulics.

SPECIFICATIONS

	2056 Series II	
DIMENSIONS	A. Overall Operating Height - Fully Raised (mm)	153.5" (3899)
	B. Height to Hinge Pin - Fully Raised (mm)	121.5" (3086)
	C. Overall Height to Top of ROPS (mm)	79.4" (2017)
	D. Ground Clearance to Chassis (mm)	7.5" (191)
	E. Overall Length with Bucket (mm)	126.3 (3208)
	F. Overall Length without Bucket (mm)	95.1" (2416)
	G. Wheelbase (mm)	42" (1067)
	H. Dump Reach at Full Height (mm)	22.8" (578)
	I. Bucket Rollback at Ground	23°
	J. Dump Angle	43°
	K. Overall Width (mm)	63" (1600)
	L. Bucket Width (mm)	66" (1676)
	M. Clearance Circle - Rear (mm)	57.3" (1454)
	N. Clearance Circle - Front without Bucket (mm)	44" (1111)
	O. Clearance Circle - Front with Bucket (mm)	79.5" (2019)
	P. Seat to Ground Height (mm)	37.5" (953)
	Q. Rollback at Full Height	88°
	R. Dump Height (mm)	91.8" (2330)
	S. Departure Angle	23°
Standard Tire Size	12.00 x 16.5 HD	
ENGINE	Make	Yanmar
	Model	4TNV98 - Interim Tier IV
	Net Power (kW) @ rpm	68 hp (50.7) @ 2500
	Displacement (L)	203 cu.in. (3.3)
	Maximum Torque (Nm) @ rpm	180.0 ft.-lbs. (244) @ 1650
HYDRAULIC SYSTEM	Auxiliary Hydraulics - Standard (L/min)	19 gpm (72)
	High-Flow Hydraulics - Optional (L/min)	30 gpm (114)
	System Relief Pressure (bar)	2750 psi (190)
	Reservoir Capacity (L)	15 gal. (56.8)
CAPACITIES / WEIGHT	Rated Operating Capacity ^A (kg)	1900 lbs. (862)
	With Optional Counterweight ^A (kg)	2050 lbs. (930)
	Tipping Load (kg)	3800 lbs. (1724)
	Fuel Tank (L)	15 gal. (56.8)
	Travel Speed - Maximum (km/hr)	12.6 mph (19.9)
	Operating Weight ^B - Approximate (kg)	6700 lbs. (3039)

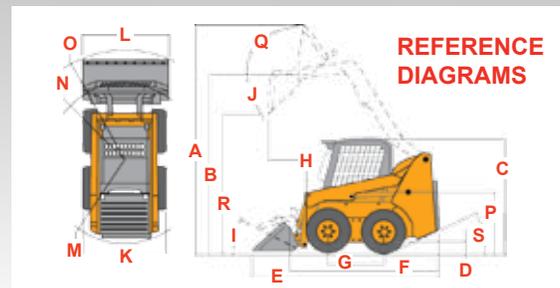

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank



For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

1-800-628-0491

or visit mustangmf.com

West Bend, WI USA
Tel: 262-334-9461
Fax: 262-338-7517