



# SKID STEER LOADERS

2076



# SERIOUS MUSCLE FOR SERIOUS WORK

## SPECIFICATIONS



**ADVANCED** ▲ 70.7-hp Yanmar Interim Tier IV-certified turbocharged diesel engine keeps this machine powered up and ready to work.



**COMPACT** ▲ machine width of only 69 inches brings extra power to small, cramped work spaces.




**EXCEPTIONAL** ▲ hydraulic power and high breakout forces drive a variety of attachments.



**FAST** ▲ travel speeds up to 12.3 mph when equipped with the two-speed drive option. Hydraglide® ride control is standard.

**ROOMY CABS** ▲ come standard with a suspension seat, work lights and choice of controls.

		2076
<b>DIMENSIONS</b>	A. Overall Operating Height - Fully Raised (mm)	162" (4115)
	B. Height to Hinge Pin - Fully Raised (mm)	123" (3124)
	C. Overall Height to Top of ROPS (mm)	81" (2057)
	D. Ground Clearance to Chassis (mm)	8.0" (203)
	E. Overall Length with Bucket (mm)	131" (3327)
	F. Overall Length without Bucket (mm)	100.5" (2553)
	G. Wheelbase (mm)	42.5" (1080)
	H. Dump Reach at Full Height (mm)	32" (813)
	I. Bucket Rollback at Ground	28°
	J. Dump Angle	37°
	K. Overall Width (mm)	69" (1753)
	L. Bucket Width (mm)	70" (1778)
	M. Clearance Circle - Rear (mm)	66" (1676)
	N. Clearance Circle - Front without Bucket (mm)	50.5" (1283)
	O. Clearance Circle - Front with Bucket (mm)	82" (2083)
	P. Seat to Ground Height (mm)	42" (1067)
	Q. Rollback at Full Height	97°
	R. Dump Height (mm)	93.5" (2375)
	S. Departure Angle	26°
Standard Specification Tire Size		12.00 x 16.5 HD
<b>ENGINE</b>	Make	Yanmar
	Model	4TNV98T - Interim Tier IV
	Power (kW) @ rpm	70.7 hp (52.7) @ 2500
	Displacement (L)	203 cu.in. (3.3)
	Maximum Torque (Nm) @ rpm	206 ft.-lbs. (279.3) @1700
<b>HYDRAULIC SYSTEM</b>	Auxiliary Hydraulics - Standard (L/min)	21.8 gpm (82.5)
	High-Flow Hydraulics - Optional (L/min)	36.9 gpm (139.7)
	System Relief Pressure (bar)	3000 psi (207)
	Reservoir Capacity (L)	16 gal. (60.6)
<b>CAPACITIES / WEIGHT</b>	Rated Operating Capacity <sup>A</sup> (kg)	2200 lbs. (998)
	With Optional Counterweight <sup>A</sup> (kg)	2500 lbs. (1134)
	Tipping Load (kg)	4400 lbs. (1996)
	Fuel Tank (L)	19 gal. (71.9)
	Travel Speed - Maximum (km/hr)	12.3 mph (19.8)
	Operating Weight <sup>B</sup> - Approximate (kg)	7610 lbs. (3452)

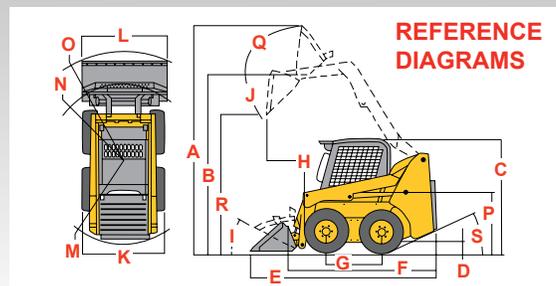

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank



For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

**1-800-628-0491**

or visit [mustangmfg.com](http://mustangmfg.com)

West Bend, WI USA  
Tel: 262-334-9461  
Fax: 262-338-7517