

HITACHI

HYDRAULIC CRAWLER CRANE

CX500/CX550

Max. Rated Load: CX500/50 000 kg at 3.8 m working radius
CX550/55 000 kg at 3.7 m working radius

Basic Boom Length: 10 m


Max. Boom Length: 52 m

Engine Rated Power: 132.4 kW (180 PS) at 2 000 min⁻¹ (2 000 rpm)

Operating Weight: CX500/49 500 kg
CX550/52 300 kg




Dependable, Operator-friendly and Comfortable. That's the Basic Design Concept.

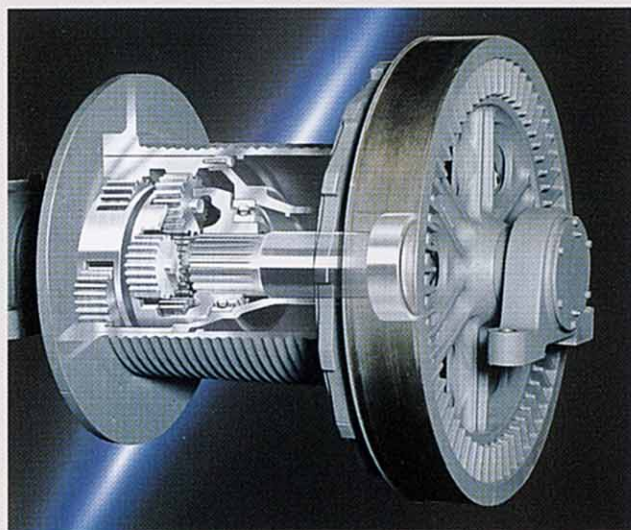


● Improved Simple-to-Use Winch System

Improved winch with built-in planetary reduction gear and wide hoist drum. This winch enhances controllability and productivity, and can meet diversified job needs, such as high lift, deep crane operation under the ground, and civil engineering works.

- 1 Speedy operation and quick mobility for increased job efficiency
- 2 Fast hoisting and lowering line speeds (100 m/min)
- 3 Wide main and auxiliary hoist drums for ample winding capacity (215m long rope wound in five layers)
- 4 Boosted heat dissipation for the brake and increased rope diameter enable more efficient bucket operation.
- 5 Improved cab design for added operator comfort and convenience

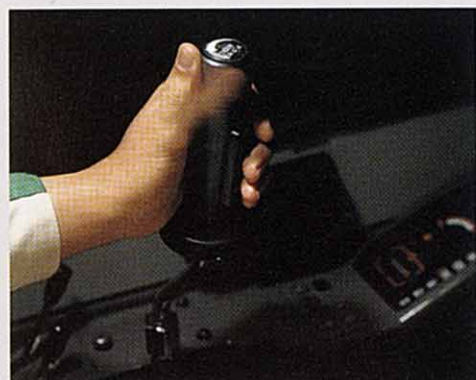

Electronic fuel control accelerator—finger-touch grip atop the swing lever—has been added to the conventional fuel control lever and accelerator pedal.

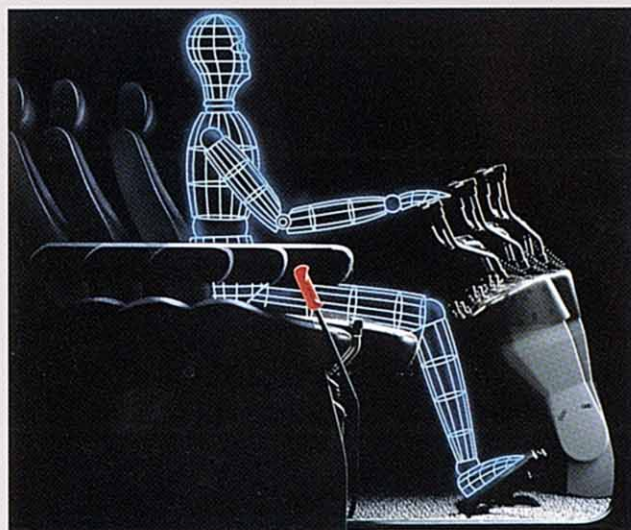

Tilt type lever stand and adjustable deluxe seat. The operator can suit his position to various job requirements.



Newly developed drum rotation sensor allows the operator to feel the starting of the drum with his hand. This is especially effective in inching when the lifting load is not visible.



CX500/CX550 (Japanese Version) at work in Japan.

●BS rating (Main Boom in 360° Working Area.)

The rated loads are determined according to BS (British Standard, 1981) and the machine is stationed on firm level ground.

Units: 10³ kg

Working Radius (m)	Boom Length (m)														
	10	13	16	19	22	25	28	31	34	37	40	43	46	49	
3.5	50.00	3.8m×50.00													
4.0	48.05	47.85	4.4m×41.05												
4.5	40.10	39.80	39.75												
5.0	33.75	33.70	33.60	33.60											
5.5	29.25	29.15	29.10	29.05	28.70										
6.0	25.75	25.70	25.60	25.60	25.50	6.1m×24.80	6.7m×21.75								
7.0	20.75	20.70	20.60	20.55	20.50	20.45	20.35	7.3m×19.35	7.8m×17.30						
8.0	17.35	17.25	17.20	17.15	17.05	17.00	16.95	16.90	16.80	8.4m×15.65					
9.0	14.90	14.80	14.70	14.65	14.55	14.50	14.45	14.45	14.30	14.20	14.20	9.6m×13.00			
10.0	9.8m×12.65	12.90	12.80	12.75	12.65	12.60	12.50	12.50	12.40	12.30	12.30	12.20	10.1m×11.95	10.7m×10.70	
12.0		10.25	10.10	10.05	9.95	9.90	9.80	9.80	9.70	9.60	9.60	9.50	9.40	9.35	
14.0		12.4m×9.80	8.30	8.25	8.15	8.10	8.00	7.95	7.85	7.75	7.75	7.65	7.55	7.50	
16.0			15.0m×7.60	6.95	6.85	6.80	6.70	6.65	6.55	6.45	6.40	6.30	6.20	6.10	
18.0				17.6m×6.15	5.85	5.80	5.70	5.65	5.55	5.40	5.40	5.30	5.20	5.10	
20.0					5.10	5.05	4.90	4.85	4.70	4.65	4.60	4.50	4.35	4.30	
22.0					20.2m×5.05	4.40	4.30	4.20	4.10	4.00	3.95	3.85	3.75	3.65	
24.0						22.8m×4.20	3.75	3.70	3.60	3.50	3.40	3.30	3.25	3.15	
26.0							25.4m×3.45	3.25	3.10	3.05	3.00	2.90	2.80	2.70	
28.0								2.90	2.75	2.65	2.60	2.50	2.40	2.30	
30.0									2.45	2.35	2.30	2.20	2.05	2.00	
32.0										30.6m×2.30	2.10	2.00	1.90	1.70	
34.0											33.2m×1.85	1.75	1.70	1.55	1.50


NOTE:

- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as main hook, from figures shown above.
- Working radius is the horizontal distance from the swing center to the center of gravity of a lifted load.
- The counterweight is 16 900 kg. (Two pieces)
- Be sure to fully extend the side frames before operating the machine.

5. Correlations between the number of falls, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (kg)	Hook Weight (kg)	Maximum Rated Load (10 ³ kg)							
		8	7	6	5	4	3	2	1
55 000	610	50.0	45.5	39.0	32.5	26.0	19.5	13.0	—
30 000	360				30.0	26.0	19.5	13.0	—
15 000	320						15.0	13.0	—
6 500	260								6.5

Front-end Attachments Available.

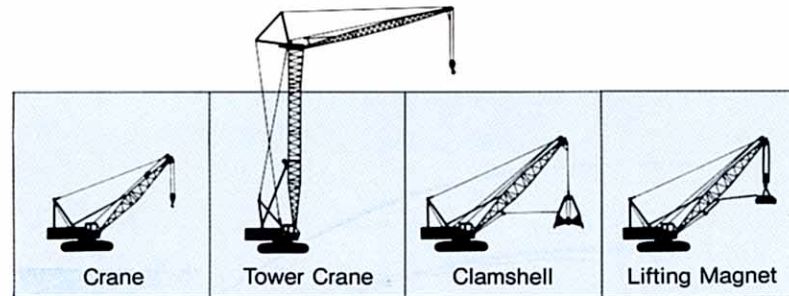

Crane Rated Loads

●JIS rating (Main Boom in 360° Working Area.)

The rated loads shown don't exceed 78% of tipping loads with the machine on firm level ground.

Units: 10³ kg

Working Radius (m)	Boom Length (m)															
	10	13	16	19	22	25	28	31	34	37	40	43	46	49	52	
3.5	55.00	3.7m×55.00														
4.0	51.20	51.00	4.4m×43.80													
4.5	42.30	42.20	42.15													
5.0	35.80	35.75	35.65	35.65												
5.5	31.05	30.95	30.85	30.85	30.45											
6.0	27.35	27.25	27.20	27.15	27.10	6.1m×26.30	6.7m×23.10									
7.0	22.05	21.95	21.85	21.85	21.75	21.70	21.65	7.3m×20.50	7.8m×18.40							
8.0	18.45	18.30	18.25	18.20	18.10	18.05	18.00	17.95	17.85	8.4m×16.60						
9.0	15.30	15.70	15.60	15.55	15.45	15.40	15.30	15.25	15.20	15.10	15.00	9.6m×13.80				
10.0	9.8m×12.55	13.70	13.60	13.50	13.45	13.40	13.30	13.25	13.15	13.10	13.00	12.95	10.1m×12.65	10.7m×10.70	11.3m×9.35	
12.0		10.70	10.75	10.65	10.60	10.55	10.45	10.40	10.30	10.20	10.10	10.10	10.00	9.90	9.15	
14.0		12.4m×9.90	8.80	8.75	8.65	8.60	8.50	8.45	8.35	8.25	8.15	8.15	8.05	7.95	7.85	
16.0			15.0m×8.00	7.35	7.25	7.20	7.10	7.05	6.95	6.85	6.75	6.75	6.65	6.55	6.45	
18.0				17.6m×6.50	6.25	6.15	6.05	6.00	5.90	5.80	5.70	5.65	5.60	5.50	5.40	
20.0					5.45	5.35	5.25	5.15	5.10	5.00	4.90	4.85	4.75	4.65	4.55	
22.0					20.2m×5.35	4.70	4.60	4.50	4.40	4.30	4.20	4.20	4.10	4.00	3.90	
24.0						22.8m×4.50	4.05	4.00	3.90	3.80	3.70	3.65	3.55	3.45	3.35	
26.0							25.4m×3.75	3.55	3.45	3.35	3.25	3.20	3.10	3.00	2.90	
28.0								3.15	3.05	2.95	2.85	2.80	2.70	2.55	2.45	
30.0									2.75	2.65	2.50	2.45	2.30	2.20	2.10	
32.0										30.6m×2.65	2.35	2.20	2.10	2.00	1.75	
34.0											33.2m×2.15	1.95	1.85	1.75	1.50	
36.0												35.8m×1.75	1.60	1.50	1.35	1.25

For notes, refer to those on page 8.

●PCSA rating (Main Boom in 360° Working Area.)

The rated loads, listed are determined according to PCSA (Power Crane and Shovel Association in U.S.A.) and do not exceed 75% of tipping load on condition that the machine is stationed on firm, level ground.

Units: 10³ kg

Working Radius (m)	Boom Length (m)															
	10	13	16	19	22	25	28	31	34	37	40	43	46	49	52	
3.5	55.00	3.7m×55.00														
4.0	49.25	49.05	4.4m×42.10													
4.5	40.65	40.60	40.50													
5.0	34.40	34.40	34.30	34.30												
5.5	29.85	29.75	29.65	29.65	29.30											
6.0	26.30	26.20	26.15	26.10	26.05	6.1m×25.30	6.7m×22.20									
7.0	21.20	21.10	21.00	21.00	20.90	20.85	20.80	7.3m×19.70	7.8m×17.70							
8.0	17.75	17.60	17.55	17.50	17.40	17.35	17.30	17.25	17.15	8.4m×15.95						
9.0	14.70	15.10	15.00	14.95	14.85	14.80	14.70	14.65	14.60	14.50	14.45	9.6m×13.25				
10.0	9.8m×12.05	13.15	13.10	13.00	12.95	12.90	12.80	12.75	12.65	12.60	12.50	12.45	10.1m×12.15	10.7m×10.30	11.3m×9.00	
12.0		10.30	10.35	10.25	10.20	10.15	10.05	10.00	9.90	9.80	9.70	9.70	9.60	9.50	8.80	
14.0		12.4m×9.50	8.45	8.40	8.30	8.25	8.15	8.15	8.05	7.95	7.85	7.85	7.75	7.65	7.55	
16.0			15.0m×7.70	7.05	6.95	6.90	6.85	6.80	6.70	6.60	6.50	6.50	6.40	6.30	6.20	
18.0				17.6m×6.25	6.00	5.90	5.80	5.75	5.65	5.60	5.50	5.45	5.35	5.30	5.20	
20.0					5.25	5.15	5.05	4.95	4.90	4.80	4.70	4.65	4.55	4.45	4.40	
22.0					20.2m×5.15	4.50	4.40	4.35	4.25	4.15	4.05	4.05	3.95	3.85	3.75	
24.0						22.8m×4.30	3.90	3.85	3.75	3.65	3.55	3.50	3.40	3.30	3.20	
26.0							25.4m×3.60	3.40	3.30	3.20	3.10	3.10	3.00	2.90	2.80	
28.0								3.05	2.95	2.85	2.75	2.70	2.60	2.50	2.40	
30.0									2.65	2.55	2.40	2.40	2.25	2.20	2.10	
32.0										30.6m×2.55	2.25	2.15	2.10	2.00	1.75	
34.0											33.2m×2.10	1.95	1.85	1.75	1.50	
36.0												35.8m×1.75	1.60	1.50	1.35	1.25

For notes, refer to those on page 8.

●BS rating (Main Boom in 360° Working Area.)

The rated loads are determined according to BS (British Standard, 1981) and the machine is stationed on firm level ground.

Units: 10³ kg

Working Radius (m)	Boom Length (m)													
	10	13	16	19	22	25	28	31	34	37	40	43	46	49
3.5	55.00	3.7m×55.00												
4.0	51.20	51.00	4.4m×43.80											
4.5	42.30	42.20	42.15											
5.0	35.80	35.75	35.65	35.65										
5.5	31.50	30.95	30.85	30.85	30.45									
6.0	27.35	27.25	27.20	27.15	27.10	6.1m×26.30	6.7m×23.10							
7.0	22.05	21.95	21.85	21.85	21.75	21.70	21.65	7.3m×20.50	7.8m×18.40					
8.0	18.45	18.30	18.25	18.20	18.10	18.05	18.00	17.95	17.85	8.4m×16.60				
9.0	15.30	15.70	15.60	15.55	15.45	15.40	15.30	15.25	15.20	15.10	15.00	9.6m×13.80		
10.0	9.8m×12.55	13.70	13.60	13.50	13.45	13.40	13.30	13.25	13.15	13.10	13.00	12.95	10.1m×12.65	10.7m×10.70
12.0		10.70	10.75	10.65	10.60	10.55	10.45	10.40	10.30	10.20	10.10	10.10	10.00	9.90
14.0		12.4m×9.90	8.80	8.75	8.65	8.60	8.50	8.45	8.35	8.25	8.15	8.15	8.05	7.95
16.0			15.0m×8.00	7.35	7.25	7.20	7.10	7.05	6.95	6.85	6.75	6.75	6.60	6.50
18.0				17.6m×6.50	6.25	6.15	6.05	6.00	5.90	5.80	5.65	5.60	5.55	5.45
20.0					5.45	5.35	5.25	5.15	5.05	4.95	4.85	4.80	4.70	4.50
22.0					20.2m×5.35	4.70	4.55	4.45	4.35	4.25	4.15	4.10	4.00	3.90
24.0						22.8m×4.45	4.00	3.95	3.85	3.70	3.60	3.55	3.45	3.35
26.0							25.4m×3.70	3.45	3.35	3.25	3.15	3.10	3.00	3.85
28.0								3.10	2.95	2.85	2.75	2.70	2.60	2.45
30.0									2.65	2.55	2.40	2.35	2.20	2.15
32.0									30.6m×2.55	2.25	2.10	2.05	1.95	1.85
34.0										33.2m×2.05	1.90	1.80	1.70	1.55
36.0											35.8m×1.70	1.60	1.50	1.35


NOTE:

- To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as main hook, from figures shown above.
- Working radius is the horizontal distance from the swing center to the center of gravity of a lifted load.
- The counterweight is 18 700 kg. (Two pieces)
- Be sure to fully extend the side frames before operating the machine.

5. Correlations between the number of falls, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (kg)	Hook Weight (kg)	Maximum Rated Load (10 ³ kg)								
		9	8	7	6	5	4	3	2	1
55 000	700	55.0	52.0	45.5	39.0	32.5	26.0	19.5	13.0	—
30 000	360					30.0	26.0	19.5	13.0	—
15 000	320							15.0	13.0	—
6 500	260									6.5

Front-end Attachments Available.

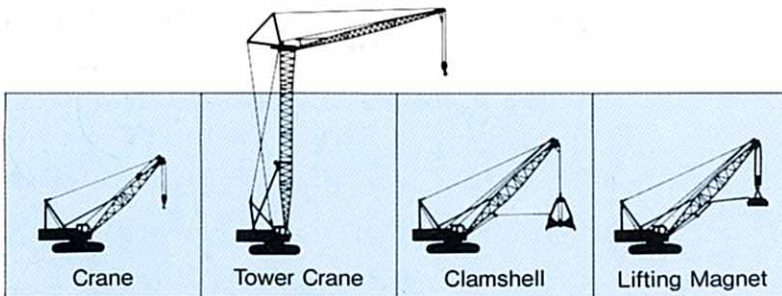

This catalog is not applicable to the European area. The machine shown may vary according to territory Specifications. Specifications are subject to change without notice.

© Hitachi Construction Machinery Co., Ltd.

Head Office: Nippon Bldg., 6-2, 2-chome, Ohtemachi, Chiyoda-ku, Tokyo 100, Japan
 Telephone: Tokyo (03) 3245-6388
 Facsimile: Tokyo (03) 3246-2609
 Telex: J32539 HITACONJ
 Cable Address: "TOKHITACHIKENKI"