


Powder Binder Spreader

α alpha
8,5 B
10 B
12 B

**With conveyor belt
Chassis mounted**

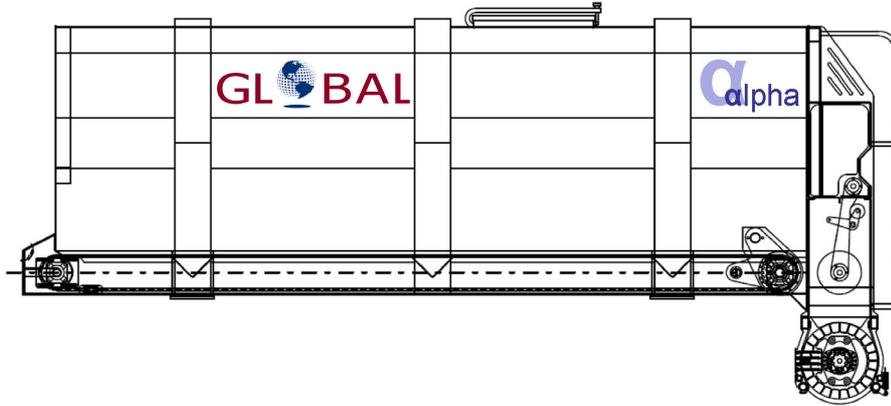

To be mounted on existing truck- or dumper chassis equipped with power take-off, operating at engine speed, with a 400 Nm torque

Modern concept, offering following features

- Binder transfer by means of a conveyor belt, width 1 m
- Product delivery rate in proportion to the drive speed
- Adjustable product delivery rate from 3 to 60 kg/m², depending on the drive speed
- Spreading by means of stainless steel cellular rotor, diameter 520 mm
- Rotor of 4 separate sections, each with independent drive and operation
- Access to spreading compartment
- Computer management in Can-Bus configuration, mounted inside anti-choc box with monochrome 3,8" display
- Fast and watertight high-quality electric connexions
- Moulded plugs
- Predisposition for filter cartridges for venting during filling procedure
- Very limited dust dispersion
- Hydraulic pumps driven by tractor PTO
- Manhole

Capacity
α 8,5 B: **8,5 m³**
α 10 B: **10 m³**
α 12 B: **12 m³**

Spreading width
α 8,5 B: **2.200 mm**
α 10 B: **2.200 mm**
α 12 B: **2.400 mm**

Total Width
α 8,5 B: **2.500 mm**
α 10 B: **2.500 mm**
α 12 B: **2.725 mm**

Height
α 8,5 B: **1.600 mm**
α 10 B: **1.600 mm**
α 12 B: **1.675 mm**

Length
α 8,5 B: **4.600 mm**
α 10 B: **5.150 mm**
α 12 B: **5.150 mm**

OPTIONS

Complete filtering device including air compressor
Air compressor
Sprinkling system with water tank and pump
Integrated weighing system
Printer