


Powder Binder Spreader



**Self-propelled,
conveyor screws,
3 axles**

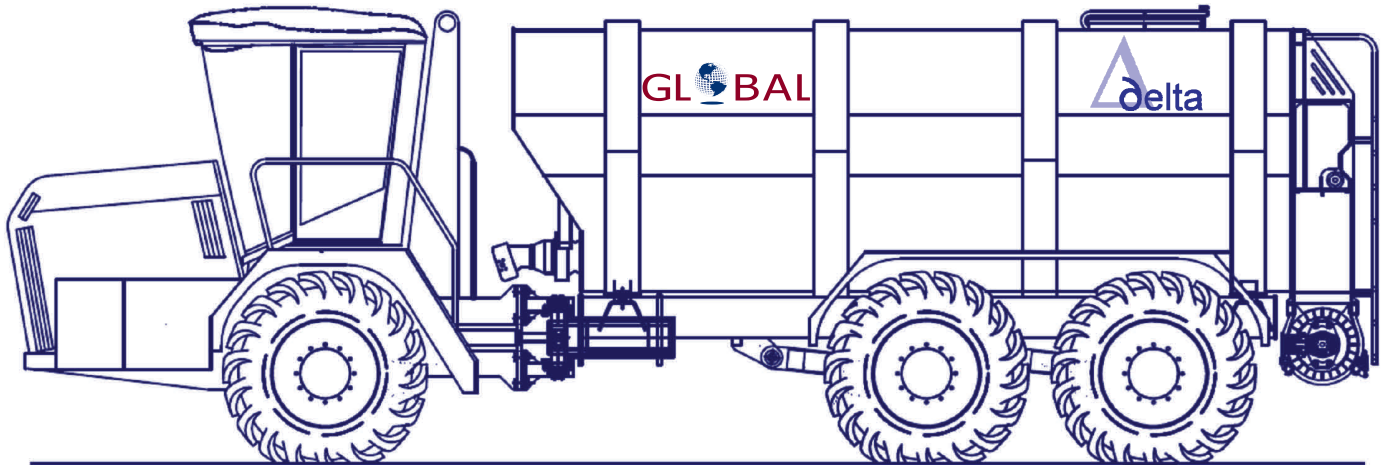

Modern concept, offering following features

- Articulated frame
- Hydrostatic drive
- Powered by Cummins - Tier III - 325 HV
- Drive speed 0 to 40 km/h
- Binder transfer by means of 2 horizontal conveyor screws
- Hydraulically driven conveyor screws
- Delivery rate in proportion to the drive speed
- Adjustable delivery rate from 3 to 60 kg/m², depending on the drive speed
- Spreading by means of stainless steel cellular rotor, diameter 520 mm
- Rotor of 4 separate sections, each with independent drive and operation
- Access to spreading compartment
- Computer management in Bus-can configuration, mounted inside shock proof box, with
- Predisposition for filter cartridges for venting during filling procedure
- Very limited dust dispersion
- Manhole
- Pressurised panoramic cabin
- Tyres 800/45 x 30,5

Capacity
∅ 15 V: **15 m³**
∅ 18 V: **18 m³**

Spreading width
2.400 mm

Width
3.000 mm

Height
3.380 mm

Length
10.000 mm

Weight
17.000 kg

OPTIONS

Complete filtering device including air compressor

Air compressor

Roll over protection

Sprinkling system with water tank and pump

Integrated weighing system

Printer

All specs are subject to change without notice or obligation
DELTA 15 18 V 04.09.E