



SELF LOADING SITE DUMPER DX 25 SL DX 25 SI AJAX FIOR AJAX (10)A)





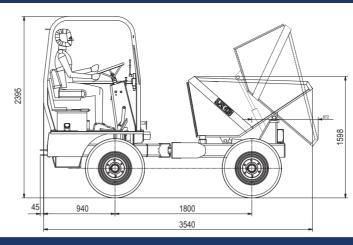

Short turning radius: 4.2 meters



Ergonomic Controls





Articulation angle: 30 degrees



Hydraulic powered self loading



Loading shovel

FNGINF:

Mahindra & Mahindra water cooled 4 stroke diesel engine - 28.7 kw @2600 rpm BS III CEV Emission Certified.

CHASSIS:

Articulated, High tensile steel welded "C" type construction.

TRANSMISSION:

4 wheel drive, with hydrostatic transmission. Electro-hydraulic control for "slow" & "fast" speeds.

Vehicle speed - 0 to 6 Kmph (Low) 0 to 11 Kmph (High)

AXLES:

Full floating hypoid type fixed front and rear axle.

BRAKES

Power braking with oil cooled disc type brakes on all 4 wheels actuated by independent pump. Hand operated parking brake by cable.

ELECTRICAL SYSTEM

Battery: 12V, 80 Amp-hr. Complete lighting & signaling system as per

HYDRAULIC SYSTEM

Gear type pump control in the cylinder to lift the skip body

Output: 18.28 lpm pressure: 160 bar

CMVR standards.

STEERING

Fully powered hydraulic steering by cylinder, operated through independent gear pump.

SELF LOADING SYSTEM:

Single joystick controlled hydrostatic cylinders operated loading shovel of 165 L.

SKIP

Heaped capacity: 1585 ltrs Struck capacity: 1240 ltrs

SERVICE REFILL CAPACITIES

Fuel tank: 34 litres Hydraulic tank: 45 litres

WHEEL

Tyre : 10.0/75-15.3 - 18 PR

Rim size : 9 x 15

WEIGHT

Net vehicle weight : 2300 kgs Gross vehicle weight: 4800 kgs

Specifications are subject to change without prior notice



For Sales Queries:

AJAX FIORI ENGINEERING (INDIA) PRIVATE LIMITED

Joint Venture - FIORI S.p.A. Italy

148 / 25, Industrial Suburb, Yeshwanthpur, Bangalore - 560 022

Tel: 080 3921 1000, Fax: 080 2347 1757

Email: info@ajax-fiori.com, Website: www.ajax-fiori.com

Northern Region : 096500 36628 ↑ Eastern Region : 094331 44581 Southern Region: 098450 58628 Western Region: 099672 63628