



AVAILABLE EQUIPMENT*

- Cab**
- ROPS/FOPS certification
 - Protective rear window guard
 - Tilt cab for service access
 - Gas strut supported door
 - Tinted safety glass
 - Sliding windows
 - Rear view mirrors- regular and wide angle
 - Electrically adjustable rearview mirrors - one per side
 - Sun visor
 - Wiper/washer with intermittent control
 - Tilt and telescoping steering wheel
 - Adjustable, air suspension seat with retractable seat belt
 - Fold-away trainer seat with retractable seat belt
 - HVAC climate control system with filtered and ducted air
 - Rotating beacon
 - 12 V power outlet/12 V cigarette lighter
 - Ash tray
 - Drinks holder
 - Cooled/heated lunch box
 - I-Tip programmable bin tip
 - Sound insulated to 76 dB(A) to ISO 6396
 - Radio/CD/Tape
 - Memory Module
 - Air horn

- Other**
- (Factory or field installed)
- Groeneveld auto greasing system
 - Retractable sun visor
 - Exhaust body heating
 - Autogate
 - Body liners
 - Fleetmatic Satellite Monitoring System
 - Driver ID and immobiliser
 - Forward working lights
 - Artic reverse light
 - Fuel heater
 - External windshield visor
 - Headlight protection grills
 - Rear window wiper
 - Antenna mounting bracket
 - System for reverse camera
 - Wiggins quick fuelling system
 - Tyre pressure monitoring

- MDU Features**
- Operator / Site selected speed control
 - Tipping counter
 - Trip timer
 - Trip distance
 - On Board Weigh System (OBW)
 - Transmission gear selection
 - Fuel Consumption
 - Diagnostics
 - Intermittent wiper timing control
 - Speedo calibration for alternative tyre sizes
 - Metric /Imperial unit selection
 - Warning lights with audible buzzer

- Gauges**
- Engine coolant temperature
 - Engine oil pressure
 - Transmission oil temperature
 - Fuel
 - Tachometer
 - Battery voltage
 - Hourmeter
 - Odometer
 - System air pressure

- Vehicle**
- Ground driven emergency steering
 - Bin safety prop
 - Articulation lock
 - Integral transmission output retarder with 6 settings



What makes the B30D a great performer...

- **With a highly efficient power and drivetrain combined with low rolling resistance, The Bell B30D delivers superior fuel efficiency**
- **High performance engine with increased power and torque and long service intervals**
- **Powerful hydraulic transmission retarder drastically cuts break use, extending pad life up to a factor of five**
- **Fewer scheduled service requirements**
- **Supreme driver comfort from a nitrogen over oil strut independent suspension system**
- **Deluxe cab - setting new standards in comfort, sound levels and simplicity in operation**
- **Tight turning circle**
- **Electronic component protection**
- **Easy service access**
- **Fast tip cycles**
- **Low ground pressure to work jobs other trucks can't**

BELL INTERNATIONAL: Tel: +27 (0) 35-907 9431
 France: Tel: +33 (0) 5 55 89 23 56 Germany: Tel: +49 (0) 6631 / 91 13 - 0
 Spain: Tel: +34 91 879 60 19 South Africa: Tel: +27 (0) 11-928-9700
 UK: Tel: +44 (0) 1283 712862
 E-mail: sales@bellequipment.com • www.bellequipment.com

All dimensions are shown in millimetres, unless otherwise stated between brackets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. Photographs featured in this brochure may include optional equipment.

**Strong Reliable Machines
Strong Reliable Support**



S1C/AS/01/01 - B30D (MkVI) A3E-109

*standard specification for machines may vary according to region



Gross Power: 240 kw (322 hp)
 Gross Torque: 1 250 Nm (922 lbft)
 Rated Payload: 27 300 kg (60,186 lbs)



B30D 6x6 ARTICULATED DUMP TRUCK MKVI



ENGINE Mercedes Benz inline 6 cylinder, turbocharged, intercooled, low emission diesel engine
 240 kW (322 hp) @ 2,200 - 1,600 rpm
 232 kW (311 hp) @ 2,200 - 1,600 rpm
Gross power
Net Power
Gross torque 1,250 Nm (922 lbf) @ 1,200 - 1,600 rpm
Net torque 1,200 Nm (885 lbf) @ 1,200 - 1,600 rpm
Displacement 7,2 litres (439 cu.in)
Fuel tank capacity 340 l (90 US gal)
Auxiliary Brake Exhaust brake
 Engine Valve Brake (EVB)
Certification OM 926 LA.111/4-00 meets Europe (EU) step 2;
 OM 926 LA.E3A/1 meets Europe (EU) step 3
Non Regulated
Regulated

TRANSMISSION Engine mounted, fully automatic ZF planetary transmission with six forward gears and one reverse gear.
Torque Converter Hydrodynamic with lock-up in all gears.
Model 6HP592C Ecomat 2 Plus
Control Type Electronic

TRANSFER BOX Remote mounted
Manufacturer VGR
Model 13100
Layout Three in-line helical gears.
Output Differential 67/33 torque proportioning, Pneumatically lockable on the move.

AXLES High strength steel fabricated with spiral bevel type gears on the limited slip locking differential and heavy duty outboard planetary gears.
Model Bell 18T

BRAKING SYSTEM
SERVICE BRAKE Dual circuit, full hydraulic actuation caliper brakes on all wheels.
Maximum brake force 164 kN (36,900 lbf)
PARK & EMERGENCY Spring applied, air released driveline mounted disc.
Maximum brake force 396 kN (89,000 lbf)
AUXILIARY BRAKE Automatic exhaust brake and Engine Valve Brake (EVB)
Maximum retardation 442 kW (593 hp)

WHEELS Earthmover
 Tyre 23.5R25



FRONT SUSPENSION Semi-independent, quad rubber mounted leading arm linkages supported by nitrogen and oil filled struts.

REAR SUSPENSION Pivoting walking beams, distributing equal load through laminated rubber suspension blocks. Each axle is coupled to the chassis by four rubber-bushed links for ideal vertical movement.

HYDRAULIC SYSTEM Variable displacement with load sensing system incorporating a ground driven emergency steering pump.
Flow 184 l/min (48.6 gal/min)
Pressure 25 Mpa (3,915 psi)
Filter 10 micron

STEERING SYSTEM Hydrostatically actuated, low effort, fast acting.
 Two double-acting steering cylinders
Lock to lock turns 4.1
Steering Angle +/-45°

DUMPING SYSTEM Two double-acting, single stage, dump cylinders
Raise Time 12 s
Lowering Time 6 s
Tipping Angle 70°

PNEUMATIC SYSTEM Air drier with heater and integral unloader valve, serving park brake and auxiliary functions
System Pressure 850 kPa (123 psi)

ELECTRICAL SYSTEM
Voltage 24 V
Battery Type Two maintenance free permanently sealed
Battery Capacity 2 X 105 Ah
Alternator Rating 28 V 80 A


VEHICLE SPEEDS
 1st 8 5
 2nd 13 8
 3rd 22 14
 4th 31 19
 5th 44 28
 6th 53 33
 R 8 km/h 5 mph

B30D 6x6 ARTICULATED DUMP TRUCK MKVI


LOAD CAPACITY & GROUND PRESSURE

WEIGHTS			GROUND PRESSURE			LOAD CAPACITY		
UNLADEN	kg	lbs	UNLADEN	kPa	psi	BODY	m³	cu.yd
Front	9,710	21,407	Front	95	13.8	Struck Capacity	12,9	16.4
Middle	4,490	9,899	Middle	47	6.8	SAE 2:1 Capacity	16,6	21.7
Rear	4,490	9,899	Rear	46	6.7	SAE 1:1 Capacity	20,3	26.6
Total	18,690	41,204	Total			SAE 2:1 Capacity with Autogate	17,7	23.3
LADEN			LADEN			Rated Payload		
Front	13,350	29,432	Front	271	39			
Middle	16,320	35,979	Middle	331	48			
Rear	16,320	35,979	Rear	331	48			
Total	45,990	101,391						

GRADEABILITY/RIMPULL

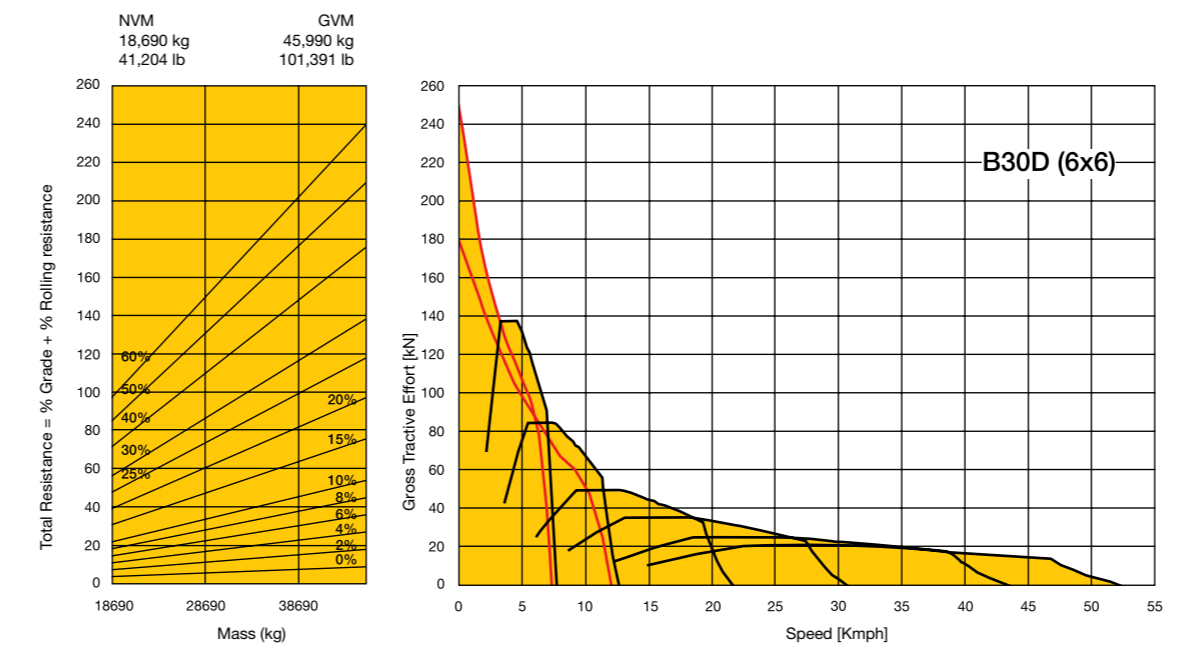

RETARDATION

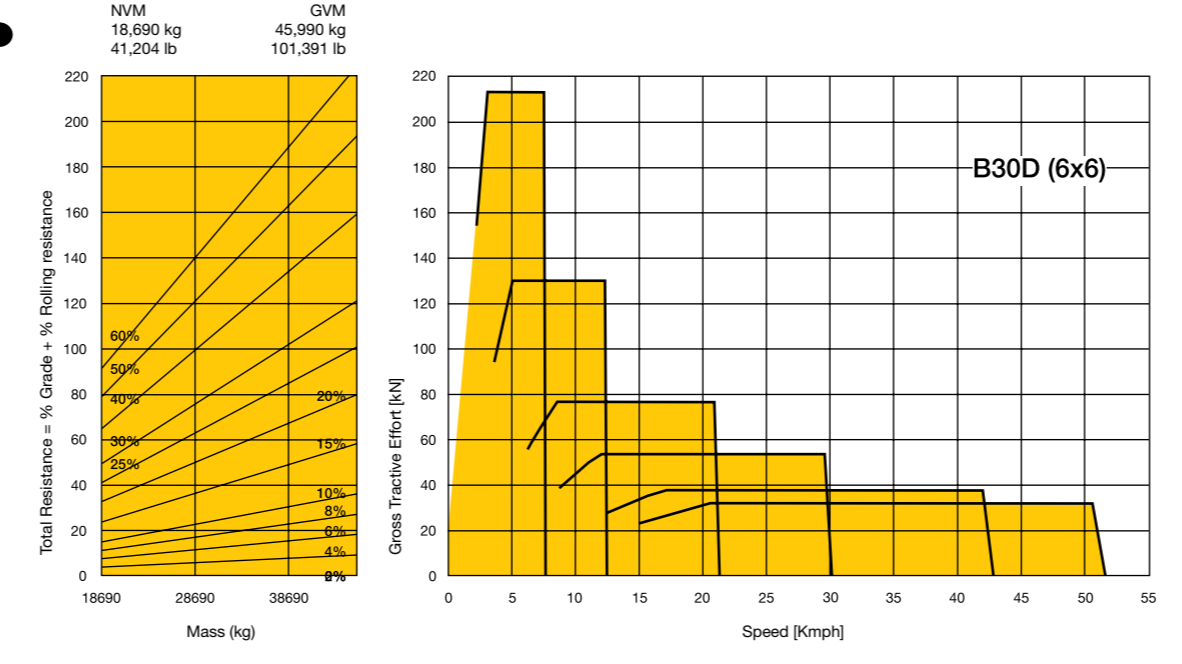

B30D 6x6 ARTICULATED DUMP TRUCK MKVI

DIMENSIONS

