

Bergmann Dumper 3009 Three-way-tip



Strong arguments for your advantage

- high stability thanks to centre articulation
- swivelling operator's stand
- electrically hydraulical spring type park brake
- compact dimensions with low dead weight

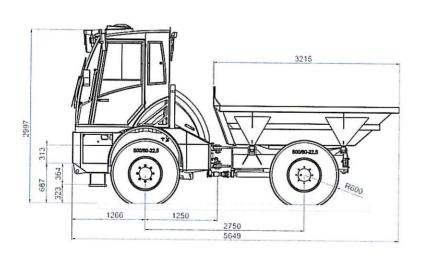





Bergmann Dumper 3009 Three-way-tip

Technical Data

Weight / Capacity	Payload		9.000 kg
	Unladen weight		6.200 kg
	Capacity struck		2.800
	Capacity heaped		4,8 m ³
	Bucket system		Hydraulical three-way-tip; changeover from reatip to three-way-tip simple by means of pins
Dimensions	Cabin height		2.997 mm
	Total length		5.650 mm
	Total width		2.420 mm
	Ground clearance 363 mm		
Transmission	Hydrostatic 4 wheel drive		
,	1. gear	speed I:	0-5 km/h
		Speed II:	0-11 km/h
	2. gear	speed I:	0-15 km/h
		Speed II:	0-30 km/h
Steering	Hydraulic artic	ulation over prio	rity valve
	Hydraulic articulation over priority valve Articulation : 35° left & right		
Axles / Brakes	Front axle rigid	l. rear axle oscilla	ting stored +/- 12°, maintenance-free-oil-bath
	multi-disc brak	e with automati	c adjustment in the front axle, hydraulically over articulated shaft on front and rear axle.
Engine	4-Zylinder Kubota Diesel engine -water cooled-		
	power 74,0 KW at 2.600 rpm.		
Tyres	Standard, all tyres 500/60-22,5		
Engine hood	Fast and easy r	naintenance and	service thanks to engine hood
	To be opened in 2 sections		
Quantity	fuel 120 L		
	hydraulic oil 8	0 L	
Electrics			
	engine oil, park	brake, direction	switch, fuel and hour counter, control lamps for indicator, battery charge control, hydraulic filte
Standard equipment	Comfortable driver's cab with air-suspended driver's seat, swivelling operator's stand, lighting system according to German traffic regulations, bucket from abraision proof fine grain steel, flashing yellow light, cigarette lighter, roller blind for front windscreen, device for radio, loudspeaker and antenna EC declaration of conformity		