
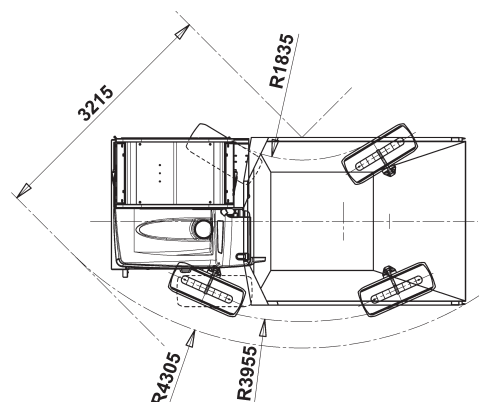


D 70SL

Transport systems with driving reversibility

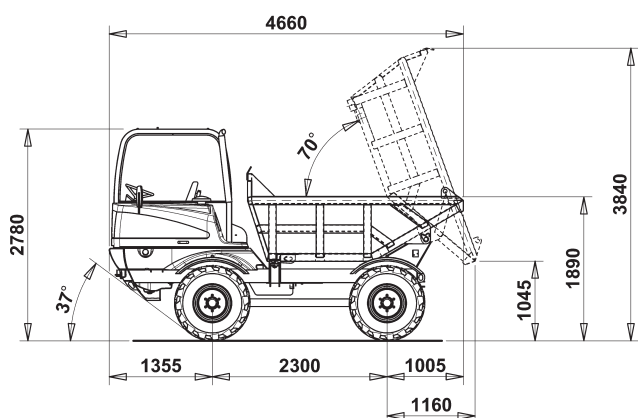

DIESEL ENGINE

PERKINS series turbo engine 1104
 Mechanical control with direct injection
 Max. power 74,5 kW - (101 Hp)
 Adj. power 70 kW (95 HP) at 2200 rpm
 Max. torque 392 Nm at 1400 rpm
 Bore/stroke: 105/127 mm
 4 cylinders - total displacement 4400 cc
 Water cooling, dry air filter

ELECTRIC SYSTEM

Alternator: 12 V - 55 A
 Battery: 12 V - 132 Ah (600 A)
 Road light and signalling system.

4X4 FOUR-WHEEL DRIVE

Hydrostatic "automotive" transmission with variable displacement pump and variable displacement hydraulic motor with electro-hydraulic control, and reverse gear control on the steering wheel. Mechanical gearbox for "working speed" and "road transfer" speed, with mechanical control.

SPEED

4 forward gears	4 reverse gears
I° 0 - 3,5 Km/h	0 - 3,5 Km/h
II° 0 - 7,6 Km/h	0 - 7,6 Km/h
III° 0 - 10,4 Km/h	0 - 10,4 Km/h
IV° 0 - 25,0 Km/h	0 - 25,0 Km/h

Traction / weight ratio 40%

AXLES AND WHEELS

Front load-bearing, oscillating ($\pm 7^\circ$) and steering with planetary reduction gears on the wheel hubs.
 Rear load-bearing and steering with planetary reduction gears on the wheel hubs and directly flanged gearbox.
 Front and rear tyres: 12.5-18 / 16 PR

BRAKES

Internal oil-bath disc service and emergency brakes acting on the 4 wheels, activation with pump on independent dual circuit.
 Drum parking brake on the front axle with lever control.

STEERING

Assisted by means of power steering on 4 steering wheels; steering selection device for: 2 steering wheels, 4 steering wheels - crab steering.

EQUIPMENT HYDRAULIC SYSTEM

Gear pump
 Max. flow rate: 45 litres/min.
 Maximum pressure: 180 bar
 1-element distributor.
 Aluminium heat exchanger for hydraulic oil cooling.
 Pressurised closed-circuit intake with oil filter replaceable from the outside.

DUMP BODY

Reinforced dump body with tilting by means of 2 double-acting jacks.
 Struck capacity 3000 litres
 SAE heaped capacity 4000 litres

CAB

Open cab in compliance with ROPS (ISO 3471) and FOPS (ISO 3449) criteria.
 180° pivoting driving post. Anatomic seat with flexible suspension and height adjustment, seat belts.
 Driving and equipment controls with ergonomic arrangement.
 LCD TV display with camera for rear visibility.

SERVICE REFILL CAPACITIES

Fuel tank in cross-linked polyethylene, 90 litres
 Total hydraulic system capacity: 90 litres
 Engine oil: 9 litres



WEIGHTS

Operating weight 4250 kg
 Max gross weight: 11250 kg
 load-carrying capacity: 7000 kg

Valid as of 01/2012. All the data are purely indicative and may change without prior notice.

D 70 BASIC

Transport systems with driving reversibility

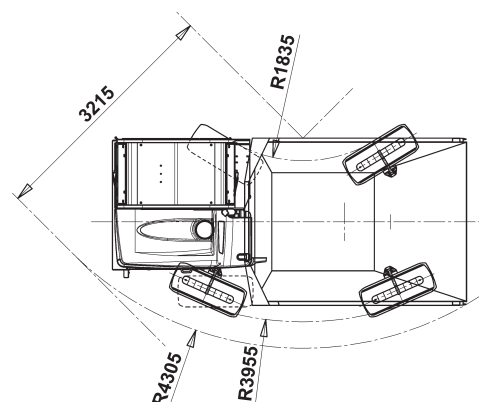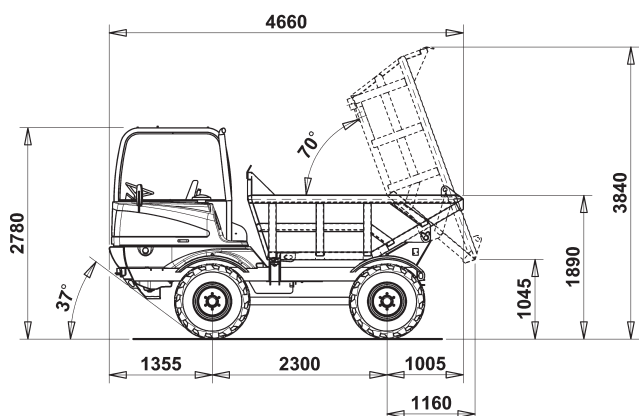

DIESEL ENGINE

PERKINS series 1104, naturally aspirated
 Mechanical control with direct injection
 Max. power 64.5 kW - (87 Hp)
 Adj. power 64 kW (87 Hp) at 2400 rpm
 Max. torque 293 Nm at 1400 rpm
 Bore/stroke: 105/127 mm
 4 cylinders - total displacement 4400 cc
 Water cooling, dry air filter
 * No emission compliance

ELECTRIC SYSTEM

Alternator: 12 V - 55 A
 Battery: 12 V - 132 Ah (600 A)
 Road light and signalling system.

4X4 FOUR-WHEEL DRIVE

Hydrostatic "automotive" transmission with variable displacement pump and variable displacement hydraulic motor with electro-hydraulic control, and reverse gear control on the steering wheel. Mechanical gearbox for "working speed" and "road transfer" speed, with mechanical control.

SPEED

4 forward gears 4 reverse gears
 I° 0 - 3,5 Km/h 0 - 3,5 Km/h
 II° 0 - 7,6 Km/h 0 - 7,6 Km/h
 III° 0 - 10,4 Km/h 0 - 10,4 Km/h
 IV° 0 - 25,0 Km/h 0 - 25,0 Km/h
 Traction / weight ratio40%

AXLES AND WHEELS

Front load-bearing, oscillating ($\pm 7^\circ$) and steering with planetary reduction gears on the wheel hubs.
 Rear load-bearing and steering with planetary reduction gears on the wheel hubs and directly flanged gearbox.
 Front and rear tyres: 12.5-18 / 16 PR

BRAKES

Internal oil-bath disc service and emergency brakes acting on the 4 wheels, activation with pump on independent dual circuit.
 Drum parking brake on the front axle with lever control.

STEERING

Assisted by means of power steering on 4 steering wheels; steering selection device for: 2 steering wheels, 4 steering wheels - crab steering.

EQUIPMENT HYDRAULIC SYSTEM

Gear pump
 Max. flow rate: 45 litres/min.
 Maximum pressure: 180 bar
 1-element distributor.
 Aluminium heat exchanger for hydraulic oil cooling.
 Pressurised closed-circuit intake with oil filter replaceable from the outside.

DUMP BODY

Reinforced dump body with tilting by means of 2 double-acting jacks.
 Struck capacity 3000 litres
 SAE heaped capacity 4000 litres

CAB

Open cab in compliance with ROPS (ISO 3471) and FOPS (ISO 3449) criteria.
 180° pivoting driving post. Anatomic seat with flexible suspension and height adjustment, seat belts.
 Driving and equipment controls with ergonomic arrangement.

SERVICE REFILL CAPACITIES

Fuel tank in cross-linked polyethylene, 90 litres
 Total hydraulic system capacity: 90 litres
 Engine oil: 9 litres

WEIGHTS

Operating weight 4250 kg
 Max gross weight: 11250 kg
 load-carrying capacity: 7000 kg

Valid as of 01/2012. All the data are purely indicative and may change without prior notice.