

Wheeled Excavators A 914 C A 924 C

Litronic®

Litronic®

Operating Weight: 20,100 - 25,600 kg
Engine Output: 120 kW / 163 HP - 135 kW / 184 HP
Bucket Capacity: 0.55 - 1.35 m³



LIEBHERR

A 914 C

Litronic®

Operating Weight: 20,100 - 22,900 kg
Engine Output: 120 kW / 163 HP
Bucket Capacity: 0.35 - 1.40 m³

A 924 C

Litronic®

Operating Weight: 20,900 - 25,600 kg
Engine Output: 135 kW / 184 HP
Bucket Capacity: 0.55 - 1.35 m³



Performance

Liebherr wheel excavators have been designed for maximum productivity. Maximum digging performances, high lift capacities and quick working cycles are prerequisite for efficient building site operation, and a wide variety of attachments optimize every excavator application.

Comfort

Largely dimensioned and ergonomically designed, the Liebherr excavator cab features an operator's seat which can be individually adjusted, as well as clearly arranged control instruments and ideal all-round view. Automatic air-conditioning guarantees an optimum temperature in the Liebherr Feel-Good cab at all times.

Economy

The Liebherr-Litronic-System increases machine performance, reduces fuel consumption and minimises service and maintenance costs. Due to Liebherr's well-balanced range, the ideal machine can always be selected to suit every application.

Reliability

Liebherr hydraulic excavators have been designed and built to withstand the toughest of conditions at the building site. Their rugged design, high-tensile materials and individual components ensure maximum availability and long life-expectancy.





Liebherr diesel engine

- Long life-expectancy, expansive cylinder capacity and increased weight
- According to level IIIA / Tier 3
- Specially designed for construction machinery operation
- Oil supply even with 100 % tilt angle



Performance

The A 914 C Litronic and the A 924 C Litronic has been designed for maximum production. Perfectly harmonized, the Liebherr-developed and Liebherr-manufactured components including diesel engine, hydraulic pump and motor, as well as swing gear and cylinders, guarantee maximum performance. Tremendous digging and breakout forces, extensive lifting capacities and quick working and travel movements are thus resulted.

Innovative solutions

Multitude of attachments

Liebherr provide an individual, application-related range of diverse attachments. Hydraulic booms, adjustable both in height and offset positions, as well as standard and offset-adjustable goosenecks, can be combined with different sticks.

Extensive lifting capacities

Canalization and the lifting of pipes are everyday tasks for rubber-tyre excavators. These requirements are endorsed via an intelligent concept of uppercarriage sectioning together with the positioning of the Liebherr engine, mounted at a transversal angle directly in front of the counterweight. Separate hoist cylinder bearing points at the upper end of the basic boom also increase the lifting capacities considerably.

Quick working cycles

High swing torque – attained as a result of the Liebherr swing ring featuring internal teeth and swing drive, specially designed to increase the torque.

Performance without compromise

Maximum performance and maximum forces are available to the operator at all times.

Liebherr Tool Control

Available as an option, immediately after the changeover of a hydraulic tool, the required pressure and oil flow values can be selected with a push of a button. Up to 10 combinations can be programmed. A tool changeover cannot be simpler and more time saving.



Rugged undercarriage

- Various undercarriage designs featuring welded, durable outriggers allow safe positioning, optimum stability, and long life-expectancy of the machine for every application.
- Prop-up blade / dozing blade in box-type design – only two bearing points for high torsional resistance



Litronic

- Increases productivity of the excavator
- Reduces fuel consumption
- Reduces service costs and eases operation
- Allows maximum sensitivity and as many overlapping movements as are required



Large-sized cab

- Adjustable steering column
- Operator's seat, adjustable in height and can also be adapted to the individual weight of the operator.
- Consoles with or without possibility of horizontal adjustment.
- Large roof window
- Sun blinds



Comfort

The excavator operator is provided with an ergonomically-arranged working area within Liebherr hydraulic excavator cabs. All switches and functions are logically laid out, and operator's seat, steering column and consoles can be adjusted individually. Conditioning and concentration can thus be maintained throughout the entire working day, guaranteeing constant, maximum productivity of the operator.

Mobile comfort

Easy access

Wide steps, ergonomically-positioned handles and adjustable steering column allow an easy access into the Liebherr operator's cab.

Optimum visibility

A well-thought-out design of the uppercarriage, featuring large glass panels and rounded edges, increase overall visibility and guarantees a safe overview of the entire working area.

Pleasant surroundings

Reduced engine speed together with elaborate sound insulation, as well as optimised hydraulic components, allow a comfortable noise level both inside and out. The noise level is comparable with that of a diesel car.

Maintenance features

Perfect lubrication

The semi-automatic lubrication system fitted as standard reliably lubricates the connected lubrication points

Ease of operation

A shut-off valve, fitted to the hydraulic tank as standard, disconnects the system and guarantees ease of maintenance to the hydraulic system.

Easy access

Large maintenance flaps allow comfortable and safe access to all maintenance points.



Storage compartment – Everything has its place

- Sufficient storage space for a commercially-approved cooler box behind the operator's seat
- Drinks holder and storage compartment in operator's cab
- Large storage box behind the operator's cab
- Two standard tool boxes in the undercarriage



Fully-automatic air-conditioning system

- The air-conditioning system, fitted as standard, offers the same comfort as that of a regular car
- Two sensors for precise temperature regulation
- Ventilation flaps are controlled via keys
- Reheat function for quick dehumidifying / defrosting of the windshield



Hydrostatic fan drive

- Accelerated warm-up period
- Guaranteed constant oil quality as a result of constant oil temperature
- Increased life-expectancy of drive components
- The fan only runs at the output required, thus conserving fuel and reducing the noise level considerably



Economy



Liebherr offer a wide range of models, guaranteeing optimum suitability for every application. Easy access to components, as well as the proven service offer allows maintenance tasks to be performed in the shortest of times, thus reducing operating costs considerably.

Low operating costs

Liebherr engine

Maximum power of the engine is generated even when running at minimum speed. This allows the necessary output without limitation, whereby the torque which is available is ample for the level required, resulting high productivity with low consumption.

Automatic idle

If no working or travel movements are being performed, the shiftable function reduces the engine speed to idle, which in turn reduces fuel consumption and emission levels.

Intelligent hydraulic management

The state-of-the-art hydraulic system allows conversion of the maximum engine output into high force or speed, as required. The maximum possible forces are available at all times.

Investment for the future

Extensive service offer

Proven service offers assured by our service personnel trained directly at the manufacturing plants, and endorsed by our tight-knit network of dealers, provide services in all required areas. Direct contact to Liebherr is guaranteed via complete integration of all service points in our own Liebherr logistics system. Electronic access to our global spare-parts management allows a 98% availability of spare-parts 24 hours a day.

High resale values

Liebherr excavators are built with high-grade materials and quality production to provide a long-term operational life-span, thus guaranteeing maximum resale values.

Service-orientated

- The semi-automatic central lubrication system fitted as standard saves on time-consuming greasing
- Long filling intervals thanks to large fuel tank
- Consistently high performance thanks to series-production fuel cooling system



Modular quick-change system made by Liebherr

- Likufix – connects all hydraulically mounted tools without having to leave the operator's cab, maximum productivity due to tool change being performed in a matter of seconds
- The suitable digging tool for every application. Your machine is a multi-functional tool carrier and will pay for itself very quickly indeed.
- Mechanic and hydraulic Liebherr quick-change adapter



Features

- High-tensile steel plates in high-stress areas for the toughest of applications
- Well-thought-out and secure bearings for attachments and cylinders
- Maximum resistance, even when lifting heavy loads



Reliability

Liebherr construction machinery is proven all over the world every day on the most diverse of building sites. Many years of experience as the world's largest manufacturer of rubber-tyre excavators, continuous development and the introduction of the latest technology are evident in every machine, guaranteeing absolute safety during applications. With its rugged design, and featuring Liebherr components, the A 914 C Litronic and the A 924 C Litronic has been designed for extremely long life-expectancy.

Quality in detail

Liebherr components

Components such as engine, hydraulic cylinders, swing gear and electric parts have been specially designed, tested and manufactured by Liebherr for construction machinery. Parts including engines and pumps for example, are already being synchronized with each other as early as the construction phase, yielding a constant standard of quality.

Functional safety

Safety-orientated components, fitted as standard, allow high availability.

The operator can thus concentrate fully on the task at hand, due to the integrated on-board electronics performing a constant balancing of pre-defined set data.

Filtering of metallic filings by the magnetic rod, fitted in the hydraulic system as standard, increases life-expectancy of the hydraulic components and the oil.

Rugged attachments

Working attachment

The durable attachments have been designed for the toughest of applications. All components are optimised to the FEM methods and the hoist cylinders feature bearings on both sides. The lifting rams are always supported by bearings on both sides and have separate bearing pins as standard.

Piping

The hydraulic lines are arranged optimally to safeguard against damage. The electric cabling is made with high-grade materials, thus guaranteeing a reliable supply to the consumer.



Liebherr hydraulic cylinders

- Specific size for each machine
- High-grade surface coating of the piston rods
- All Liebherr cylinders feature special long-life sealing systems
- Shock absorption at both sides in the working cylinders



Functional safety

- Essential operating data is stored and can be recalled at any time.
- Control and monitoring functions increase functional safety of the machine.
- Four fixed working modes for output discharge facilitate an effective and efficient operation:
 - Eco-Mode: for high output at big fuel savings
 - Power-Mode: for heavy-duty digging-and loading performance under severe conditions
 - Lift-Mode: for precise handling of heavy loads
 - Fine-Mode: for fine control at precision work

Technical Data



Engine

Rating per ISO 9249

A 914 C Litronic 120 kW (163 HP) at 1,800 RPM

A 924 C Litronic 135 kW (184 HP) at 1,800 RPM

Model

A 914 C Litronic Liebherr D 934 S according to level IIIA/Tier 3

A 924 C Litronic Liebherr D 934 L according to level IIIA/Tier 3

Type

4 cylinder in-line

Bore/Stroke

A 914 C Litronic 122/136 mm

A 924 C Litronic 122/150 mm

Displacement

A 914 C Litronic 6.4 l

A 924 C Litronic 7.0 l

Engine operation

4-stroke diesel

unit pump system

turbocharged and after-cooled

reduced emissions

Cooling system

water-cooled and integrated motor oil cooler

Air cleaner

dry-type air cleaner with pre-cleaner, primary and safety elements

Fuel tank

400 l

Engine idling

sensor controlled

Electrical system

Voltage 24 V

Batteries 2 x 135 Ah/12 V

Alternator three phase current 28 V/80 A



Swing Drive

Drive swashplate motor with torque control and integrated brake valve

Liebherr compact planetary reduction gear

Swing ring Liebherr sealed single race ball bearing swing ring, internal teeth

Swing speed

A 914 C Litronic 0 – 9.0 RPM stepless

A 924 C Litronic 0 – 8.0 RPM stepless

Swing torque

A 914 C Litronic 66 kNm

A 924 C Litronic 74 kNm

Holding brake wet discs (spring applied – pressure released)

Option pedal controlled positioning brake



Operator's Cab

Cab resiliently mounted, sound insulated, tinted windows, front window stores overhead, door with sliding window, large roof window, sun visor fully adjustable, shockabsorbing suspension, adjustable to operator's weight and size, 6-way

adjustable Liebherr seat

Joysticks integrated into adjustable seat consoles

Monitoring menu driven query of current operating conditions via the LCD display. Automatic monitoring, display, warning (acoustical and optical signal) and saving machine data, for example, engine overheating, low engine oil pressure or low hydraulic oil level

Air conditioning standard air conditioning, combined cooler/heater, additional dust filter in fresh air/recirculated

Noise emission ISO 6396 L_{PA} (inside cab) = 74 dB(A)

2000/14/EC L_{WA} (surround noise) = 103 dB(A)



Undercarriage

Drive variable flow swashplate motor with automatic brake valve

Transmission oversized two speed power shift transmission with additional creeper speed

Travel speed 0 – 2.5 km/h (creeper speed off road)

0 – 5.0 km/h (off road)

0 – 9.0 km/h (creeper speed on road)

0 – 20.0 km/h (road travel)

Axes 40 t excavator axles; automatic or operator controlled front axle oscillation lock

Brakes steering and rigid axle with wet, maintenance-free multi disc brakes with minimized backlash.

Spring applied/pressure released parking brake

integrated into gear box

Stabilization stabilizing blade (adjustable during travel for dozing)

2 point outriggers

stabilizing blade, front + 2 pt. outriggers, rear

4 point outriggers



Attachment

Hydraulic cylinders Liebherr cylinders with special seal system.

Shock absorption

sealed, low maintenance

Lubrication Liebherr semi-automatic central lubrication system



Hydraulic Controls

Power distribution via control valve with integrated safety valves, simultaneous and independent operation of travel drive, swing drive and work

Control type


Attachment and swing proportional via joystick levers

Travel proportional via foot pedal

Additional functions via switch and/or proportional foot pedals

Option Liebherr-Proportional-Controls, proportionally acting transmitters on the joysticks for additional hydraulic functions

Dimensions

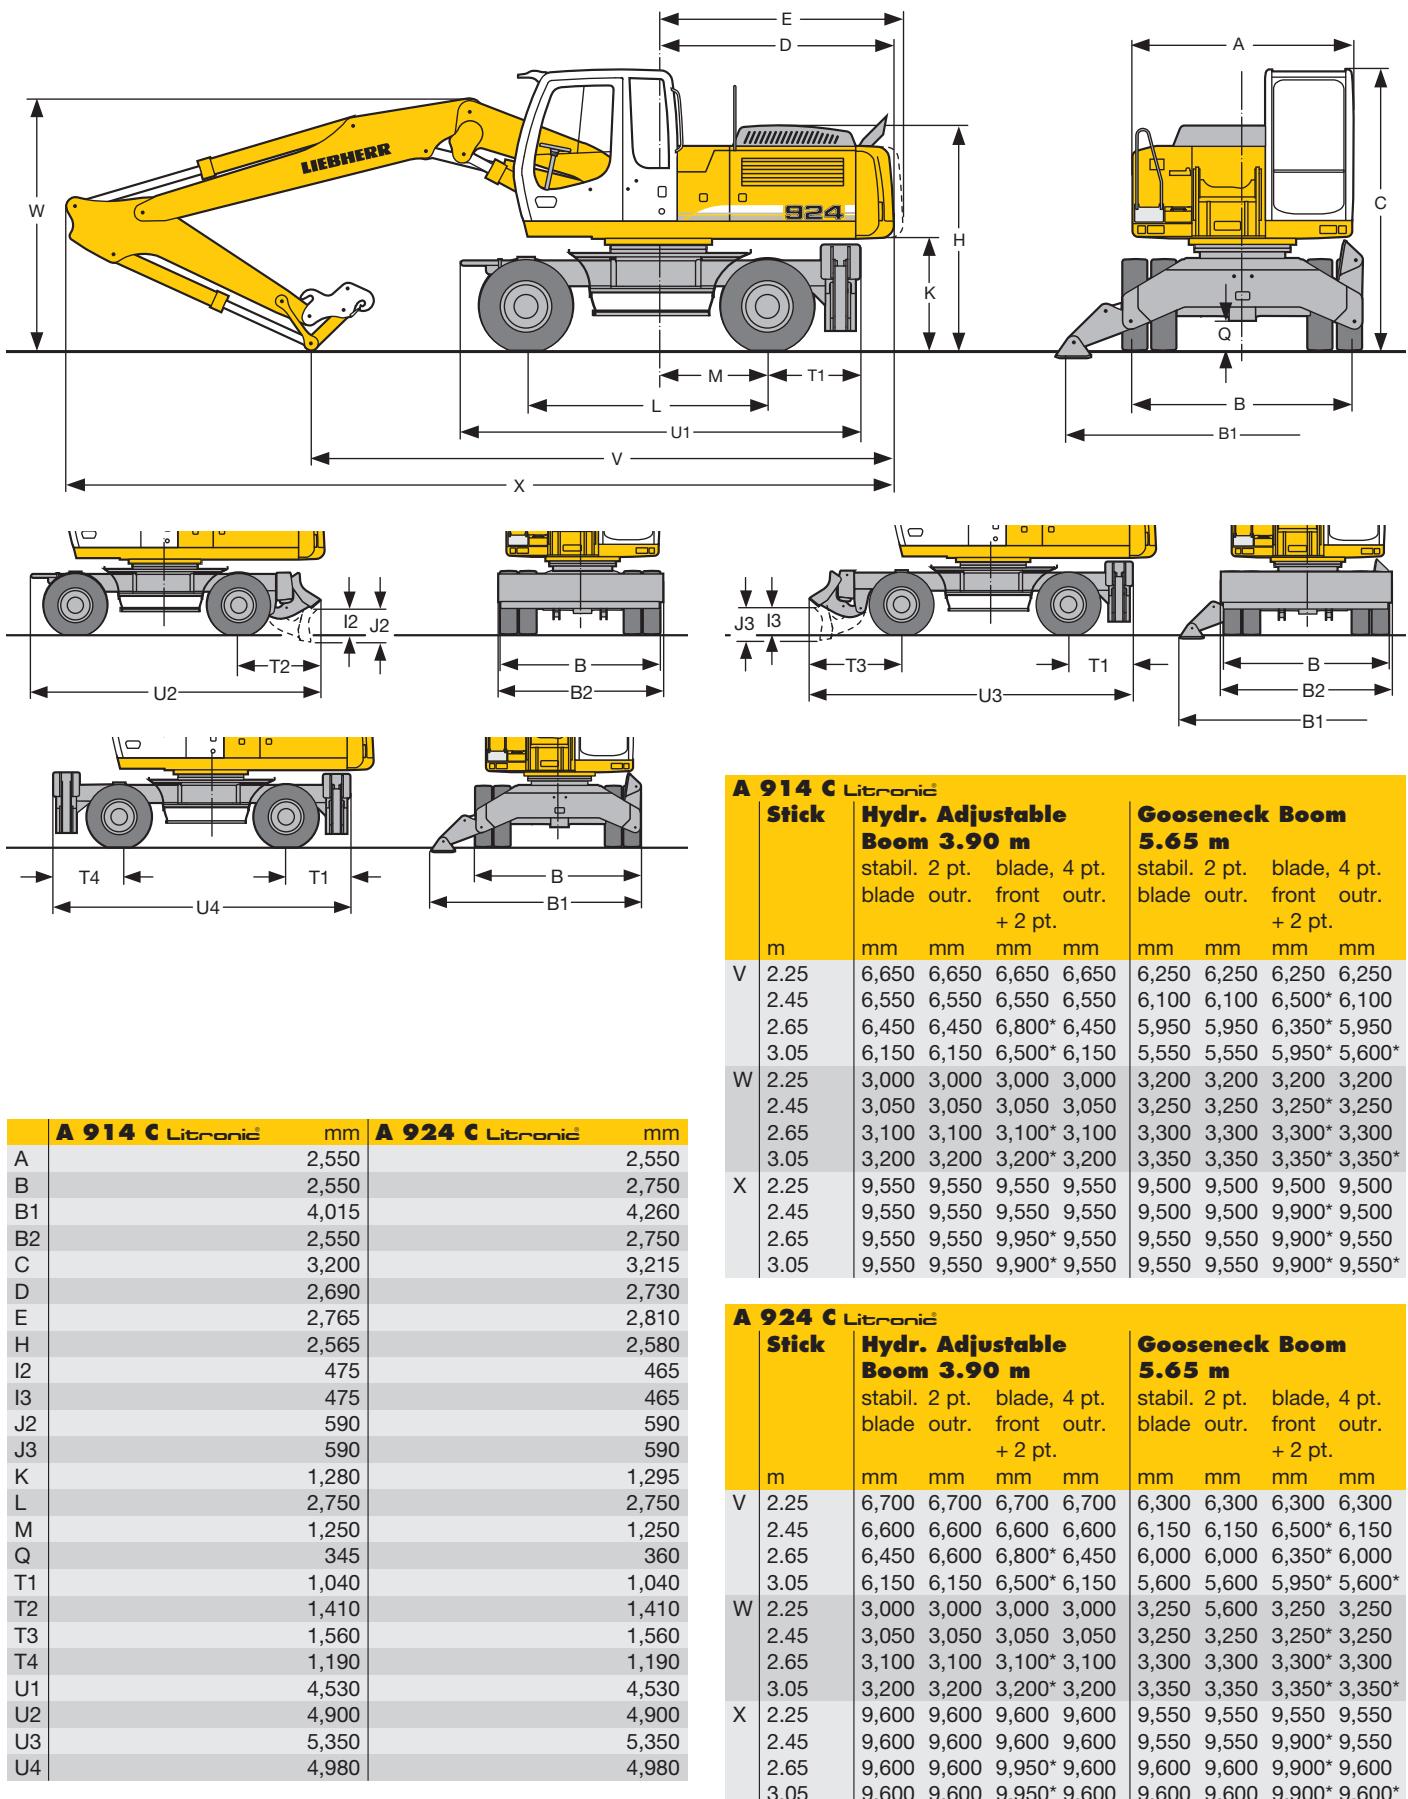

A 914 C Litronic

Stick | Hydr. Adjustable Boom 3.90 m

stabl. 2 pt. blade, 4 pt. blade outr. front outr. + 2 pt.

	m	mm							
V	2.25	6,650	6,650	6,650	6,650	6,250	6,250	6,250	6,250
	2.45	6,550	6,550	6,550	6,550	6,100	6,100	6,500*	6,100
	2.65	6,450	6,450	6,800*	6,450	5,950	5,950	6,350*	5,950
	3.05	6,150	6,150	6,500*	6,150	5,550	5,550	5,950*	5,600*

A 924 C Litronic

Stick | Hydr. Adjustable Boom 3.90 m

stabl. 2 pt. blade, 4 pt. blade outr. front outr. + 2 pt.

	m	mm							
V	2.25	6,700	6,700	6,700	6,700	6,300	6,300	6,300	6,300
	2.45	6,600	6,600	6,600	6,600	6,150	6,150	6,500*	6,150
	2.65	6,450	6,600	6,800*	6,450	6,000	6,000	6,350*	6,000
	3.05	6,150	6,150	6,500*	6,150	5,600	5,600	5,950*	5,600*
W	2.25	3,000	3,000	3,000	3,000	3,250	5,600	3,250	3,250
	2.45	3,050	3,050	3,050	3,050	3,250	3,250	3,250*	3,250
	2.65	3,100	3,100	3,100*	3,100	3,300	3,300	3,300*	3,300
	3.05	3,200	3,200	3,200*	3,200	3,350	3,350	3,350*	3,350*
X	2.25	9,600	9,600	9,600	9,600	9,550	9,550	9,550	9,550
	2.45	9,600	9,600	9,600	9,600	9,550	9,550	9,900*	9,550
	2.65	9,600	9,600	9,950*	9,600	9,600	9,600	9,900*	9,600
	3.05	9,600	9,600	9,950*	9,600	9,600	9,600	9,900*	9,600*

Dimensions are with attachment over steering axle


* Attachment over digging axle for shorter transport dimensions

Tires 10.00-20

Tires 11.00-20

Backhoe Attachment A 914 C Litronic®

with Hydr. Adjustable Boom 3.90 m

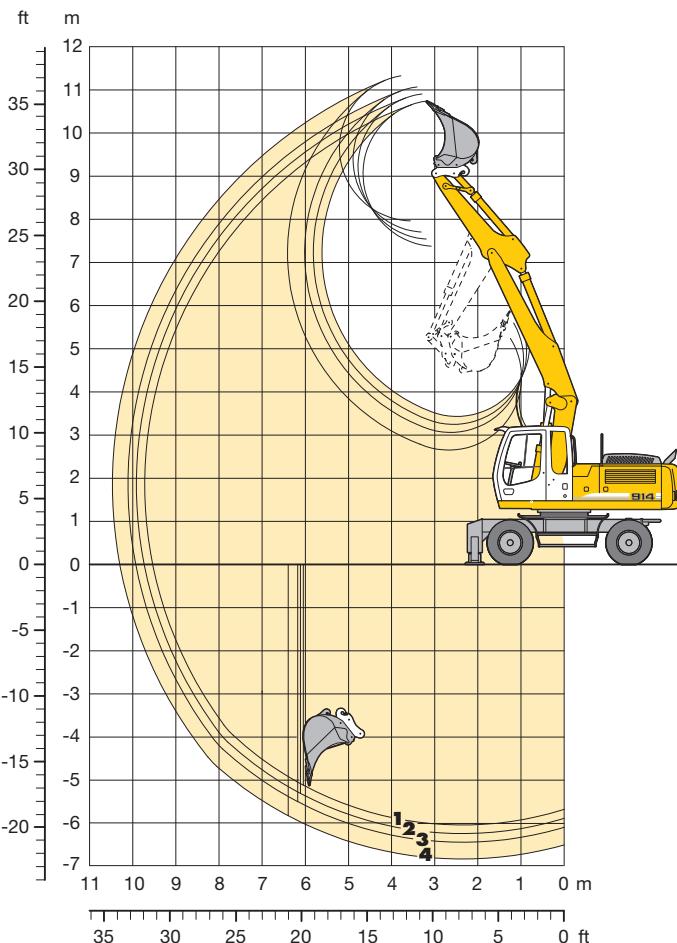

Digging Envelope with Quick Change Adapter

	1	2	3	4
Stick length m	2.25	2.45	2.65	3.05
Max. digging depth m	6.05	6.25	6.45	6.85
Max. reach at ground level m	9.55	9.75	9.95	10.30
Max. dumping height m	7.40	7.55	7.70	7.95
Max. teeth height m	10.75	10.90	11.05	11.30
Min. attachment radius m	3.30	3.15	3.10	3.10

Digging Forces

without Quick Change Adapter

Max. digging force (ISO 6015)	kN	1	2	3	4
t	13.0	12.2	11.5	10.4	
Max. breakout force (ISO 6015)	kN	144.4	144.4	144.4	144.4
t	14.7	14.7	14.7	14.7	14.7
Max. breakout force with ripper bucket	186.0 kN (19.0 t)				
Max. possible digging force (stick 1.70 m)	154.6 kN (15.8 t)				

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, hydr. adjustable boom 3.90 m, stick 2.25 m, quick change adapter 48 and bucket 1,050 mm/0.95 m³.

Undercarriage versions	Weight
A 914 C Litronic® with stabilizer blade	20,700 kg
A 914 C Litronic® with 2 pt. outriggers	21,100 kg
A 914 C Litronic® with stabilizer blade + 2 pt. outriggers	22,200 kg
A 914 C Litronic® with 4 pt. outriggers	22,600 kg

Buckets Machine stability per ISO 10567° (75% of tipping capacity)

Cutting width mm	Capacity ISO 7451) m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
650 ²⁾	0.55	540	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ²⁾	0.75	620	■	■	■	▲	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ²⁾	0.95	710	▲	▲	▲	▲	■	■	▲	▲	□	□	△	△	□	□	□	□	□	□	□	□
1,250 ²⁾	1.15	810	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	■	□	□	□	□	□	□	□	□
1,400 ²⁾	1.35	850	▲	▲	▲	▲	▲	▲	▲	▲	■	■	▲	▲	□	△	△	△	□	□	□	□
650 ³⁾	0.55	600	□	□	△	■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ³⁾	0.75	690	■	■	▲	▲	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ³⁾	0.95	800	▲	▲	▲	▲	■	■	▲	▲	□	△	△	■	□	□	□	□	□	□	□	□
1,250 ³⁾	1.15	910	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	▲	□	□	□	□	△	□	□	□
1,400 ³⁾	1.35	960	▲	▲	▲	▲	▲	▲	▲	▲	■	▲	▲	▲	□	△	△	■	□	□	□	□
650 ⁴⁾	0.60	530	□	□	△	■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ⁴⁾	0.80	630	■	■	▲	▲	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ⁴⁾	1.05	720	▲	▲	▲	▲	▲	▲	▲	▲	△	△	△	■	□	□	□	□	□	□	□	□
1,250 ⁴⁾	1.30	800	▲	▲	▲	▲	▲	▲	▲	▲	■	■	■	▲	□	△	△	□	□	□	□	□
1,400 ⁴⁾	1.50	870	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	△	■	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75 % of tipping or 87 % of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ comparable with SAE (heaped)


²⁾ Bucket with teeth ³⁾ Bucket with teeth in HD-version ⁴⁾ Bucket with cutting lip (also available in HD-version)

Max. material weight □ = ≤ 1.8 t/m³, △ = ≤ 1.5 t/m³, ■ = ≤ 1.2 t/m³, ▲ = not authorized

Backhoe Attachment A 924 C

Litronic®

with Hydr. Adjustable Boom 3.90 m

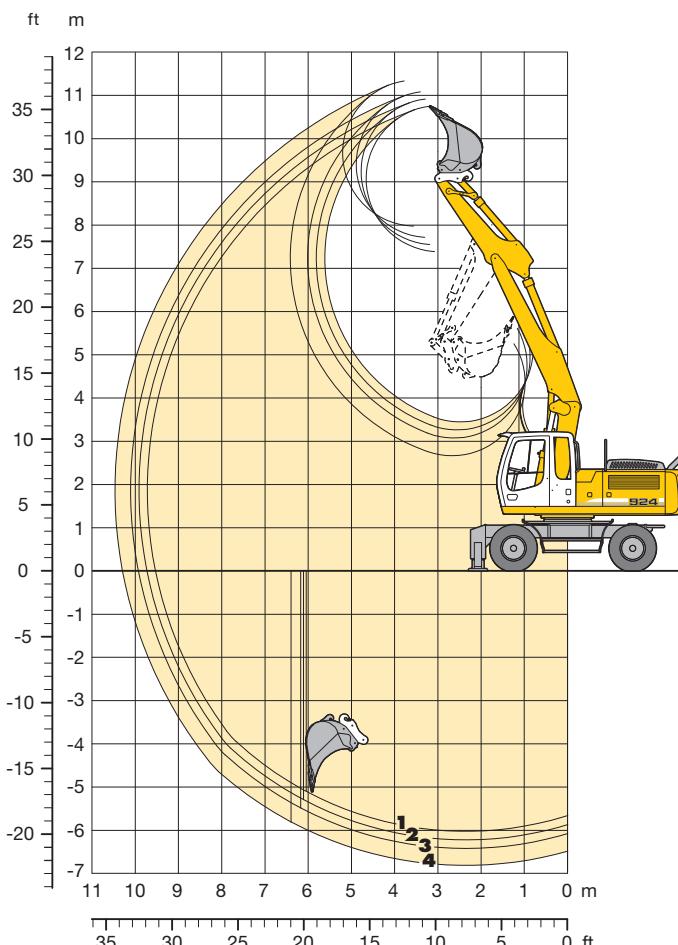

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	6.00	6.20	6.40	6.80
Max. reach at ground level	m	9.55	9.75	9.95	10.30
Max. dumping height	m	7.40	7.55	7.70	8.00
Max. teeth height	m	10.75	10.90	11.10	11.35
Min. attachment radius	m	3.30	3.15	3.10	3.10

Digging Forces

without Quick Change Adapter

	1	2	3	4	
Max. digging force (ISO 6015)	kN	127.5	119.9	113.3	102.0
	t	13.0	12.2	11.5	10.4
Max. breakout force (ISO 6015)	kN	144.4	144.4	144.4	144.4
	t	14.7	14.7	14.7	14.7
Max. breakout force with ripper bucket					186.0 kN (19.0 t)
Max. possible digging force (stick 1.70 m)					154.6 kN (15.8 t)

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, hydr. adjustable boom 3.90 m, stick 2.25 m, quick change adapter 48 and bucket 1,250 mm/1.15 m³.

Undercarriage versions	Weight
A 924 C Litronic with stabilizer blade	23,200 kg
A 924 C Litronic with 2 pt. outriggers	23,600 kg
A 924 C Litronic with stabilizer blade + 2 pt. outriggers	24,900 kg
A 924 C Litronic with 4 pt. outriggers	25,400 kg

Buckets Machine stability per ISO 10567* (75% of tipping capacity)

Cutting width mm	Capacity ISO 7451) m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
650 ²⁾	0.55	540	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ²⁾	0.75	620	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ²⁾	0.95	710	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,250 ²⁾	1.15	810	△	△	△	■	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□	□
1,400 ²⁾	1.35	850	■	■	■	▲	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□	□
650 ³⁾	0.55	600	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ³⁾	0.75	690	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ³⁾	0.95	800	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,250 ³⁾	1.15	910	△	△	■	■	□	△	△	△	□	□	□	□	□	□	□	□	□	□	□	□
1,400 ³⁾	1.35	960	■	■	■	▲	△	■	■	■	□	□	□	□	□	□	□	□	□	□	□	□
650 ⁴⁾	0.60	530	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ⁴⁾	0.80	630	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ⁴⁾	1.05	720	□	□	△	△	□	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□
1,250 ⁴⁾	1.30	800	△	■	■	■	△	△	△	■	□	□	□	□	□	□	□	□	□	□	□	□
1,400 ⁴⁾	1.50	870	■	■	▲	▲	■	■	■	■	▲	□	□	□	□	□	□	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75% of tipping or 87% of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ comparable with SAE (heaped)

²⁾ Bucket with teeth ³⁾ Bucket with teeth in HD-version ⁴⁾ Bucket with cutting lip (also available in HD-version)


Buckets with cutting width 1,500 mm/1,600 mm available on request

Max. material weight □ = ≤ 1.8 t/m³, △ = ≤ 1.5 t/m³, ■ = ≤ 1.2 t/m³, ▲ = not authorized

Backhoe Attachment A 914 C

with Gooseneck Boom 5.65 m

Litronic®

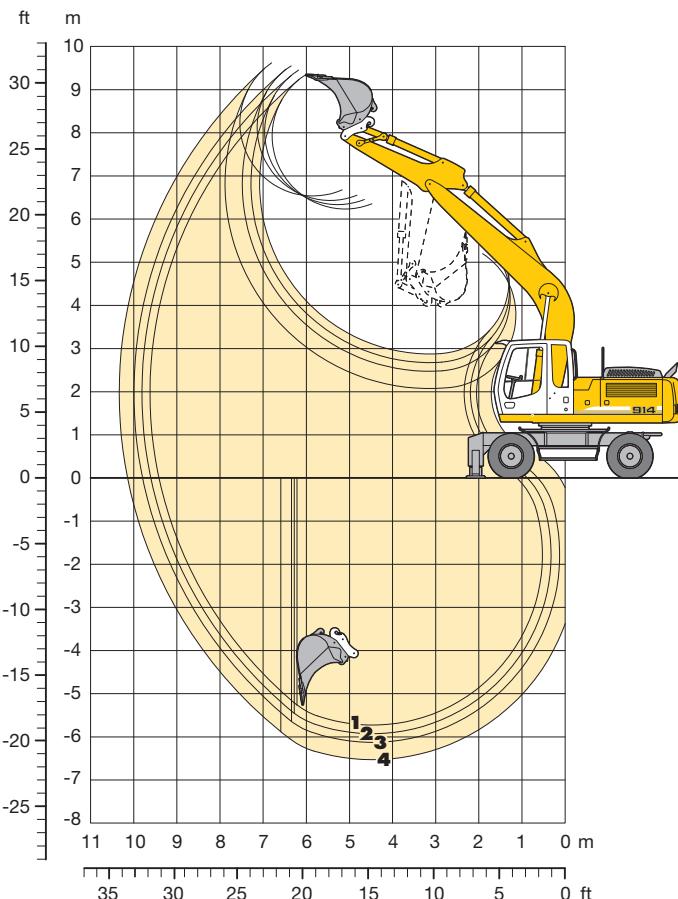

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	5.75	5.95	6.15	6.55
Max. reach at ground level	m	9.40	9.60	9.80	10.15
Max. dumping height	m	6.35	6.45	6.55	6.70
Max. teeth height	m	9.35	9.45	9.55	9.60
Min. attachment radius	m	4.00	3.80	3.50	3.20

Digging Forces

without Quick Change Adapter

	1	2	3	4	
Max. digging force (ISO 6015)	kN	127.5	119.9	113.3	102.0
t	t	13.0	12.2	11.5	10.4
Max. breakout force (ISO 6015)	kN	144.4	144.4	144.4	144.4
t	t	14.7	14.7	14.7	14.7
Max. breakout force with ripper bucket					186.0 kN (19.0 t)
Max. possible digging force (stick 1.70 m)					154.6 kN (15.8 t)

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, gooseneck boom 5.65 m, stick 2.25 m, quick change adapter 48 and bucket 1,050 mm/0.95 m³.

Undercarriage versions	Weight
A 914 C Litronic® with stabilizer blade	20,100 kg
A 914 C Litronic® with 2 pt. outriggers	20,500 kg
A 914 C Litronic® with stabilizer blade + 2 pt. outriggers	21,600 kg
A 914 C Litronic® with 4 pt. outriggers	21,900 kg

Buckets Machine stability per ISO 10567° (75% of tipping capacity)

Cutting width mm	Capacity ISO 7451 ¹⁾ m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
650 ²⁾	0.55	540	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ²⁾	0.75	620	△	■	■	▲	△	△	△	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ²⁾	0.95	710	▲	▲	▲	▲	■	■	▲	▲	□	□	△	△	□	□	□	□	□	□	□	□
1,250 ²⁾	1.15	810	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	■	□	□	□	□	□	□	□	□
1,400 ²⁾	1.35	850	▲	▲	▲	▲	▲	▲	▲	▲	■	■	▲	▲	□	□	△	△	□	□	□	□
650 ³⁾	0.55	600	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ³⁾	0.75	690	■	■	▲	▲	▲	△	△	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ³⁾	0.95	800	▲	▲	▲	▲	■	▲	▲	▲	□	□	△	△	□	□	□	□	□	□	□	□
1,250 ³⁾	1.15	910	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	▲	□	□	□	△	□	□	□	□
1,400 ³⁾	1.35	960	▲	▲	▲	▲	▲	▲	▲	▲	■	▲	▲	▲	□	△	△	■	□	□	□	□
650 ⁴⁾	0.60	530	□	□	△	■	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□
850 ⁴⁾	0.80	630	■	■	▲	▲	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ⁴⁾	1.05	720	▲	▲	▲	▲	▲	▲	▲	▲	□	△	△	■	□	□	□	□	□	□	□	□
1,250 ⁴⁾	1.30	800	▲	▲	▲	▲	▲	▲	▲	▲	■	■	▲	▲	□	□	△	△	□	□	□	□
1,400 ⁴⁾	1.50	870	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	△	△	■	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75 % of tipping or 87 % of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ comparable with SAE (heaped)


²⁾ Bucket with teeth ³⁾ Bucket with teeth in HD-version ⁴⁾ Bucket with cutting lip (also available in HD-version)

Max. material weight □ = ≤ 1.8 t/m³, △ = ≤ 1.5 t/m³, ■ = ≤ 1.2 t/m³, ▲ = not authorized

Backhoe Attachment A 924 C

Litronic®

with Gooseneck Boom 5.65 m

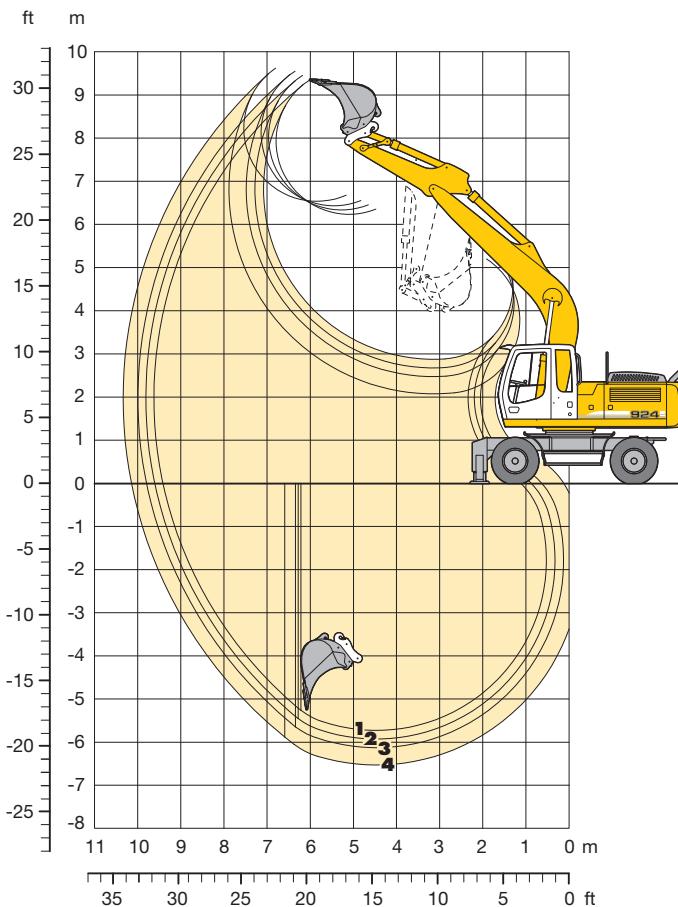

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	5.70	5.90	6.10	6.50
Max. reach at ground level	m	9.40	9.60	9.80	10.15
Max. dumping height	m	6.35	6.45	6.55	6.70
Max. teeth height	m	9.35	9.45	9.55	9.65
Min. attachment radius	m	3.95	3.70	3.45	3.15

Digging Forces

without Quick Change Adapter

	1	2	3	4	
Max. digging force (ISO 6015)	kN	127.5	119.9	113.3	102.0
	t	13.0	12.2	11.5	10.4
Max. breakout force (ISO 6015)	kN	144.4	144.4	144.4	144.4
	t	14.7	14.7	14.7	14.7

Max. breakout force with ripper bucket 186.0 kN (19.0 t)
Max. possible digging force (stick 1.70 m) 154.6 kN (15.8 t)

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, gooseneck boom 5.65 m, stick 2.25 m, quick change adapter 48 and bucket 1,250 mm/1.15 m³.

Undercarriage versions	Weight
A 924 C Litronic with stabilizer blade	22,700 kg
A 924 C Litronic with 2 pt. outriggers	23,100 kg
A 924 C Litronic with stabilizer blade + 2 pt. outriggers	24,400 kg
A 924 C Litronic with 4 pt. outriggers	24,900 kg

Buckets Machine stability per ISO 10567* (75% of tipping capacity)

Cutting width mm	Capacity ISO 7451) m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
650 ²⁾	0.55	540	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ²⁾	0.75	620	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ²⁾	0.95	710	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,250 ²⁾	1.15	810	△	△	△	■	□	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□
1,400 ²⁾	1.35	850	■	■	■	▲	△	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□
650 ³⁾	0.55	600	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ³⁾	0.75	690	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ³⁾	0.95	800	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,250 ³⁾	1.15	910	△	△	■	■	□	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□
1,400 ³⁾	1.35	960	■	■	■	▲	△	△	△	■	■	□	□	□	□	□	□	□	□	□	□	□
650 ⁴⁾	0.60	530	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
850 ⁴⁾	0.80	630	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,050 ⁴⁾	1.05	720	□	□	△	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,250 ⁴⁾	1.30	800	△	■	■	■	■	△	△	△	■	□	□	□	□	□	□	□	□	□	□	□
1,400 ⁴⁾	1.50	870	■	■	▲	▲	■	■	■	■	■	□	□	□	□	□	□	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75 % of tipping or 87 % of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ comparable with SAE (heaped)

²⁾ Bucket with teeth ³⁾ Bucket with teeth in HD-version ⁴⁾ Bucket with cutting lip (also available in HD-version)


Buckets with cutting width 1,500 mm/1,600 mm available on request

Max. material weight □ = ≤ 1.8 t/m³, △ = ≤ 1.5 t/m³, ■ = ≤ 1.2 t/m³, ▲ = not authorized

Clamshell Attachment A 914 C

Litronic®

with Hydr. Adjustable Boom 3.90 m

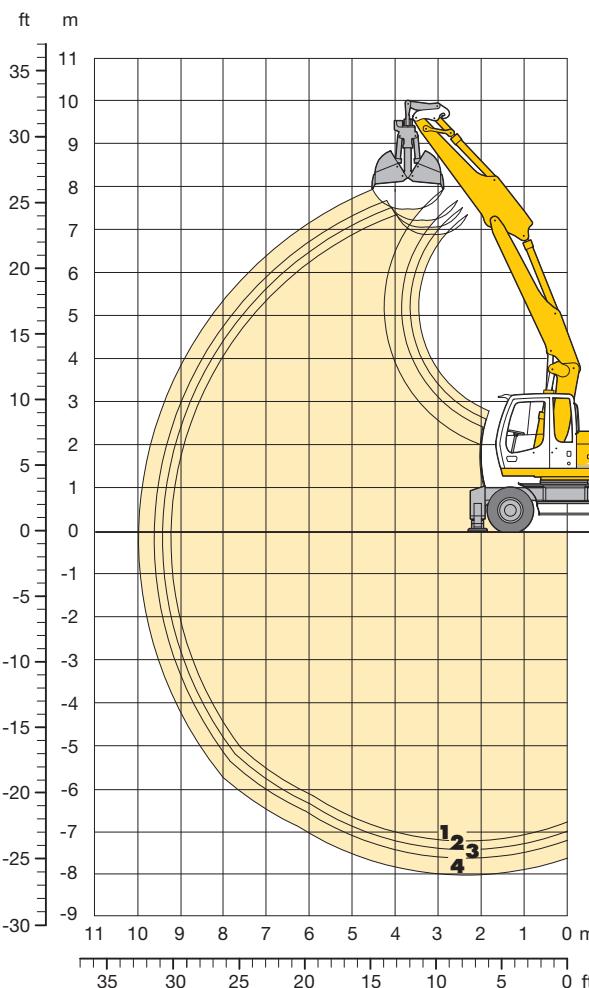

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	7.15	7.35	7.55	7.95
Max. reach at ground level	m	9.20	9.40	9.60	9.95
Max. dumping height	m	6.90	7.10	7.25	7.50

Clamshell Model

10 B

Max. tooth force	73 kN (7.4 t)
Max. torque of hydr. swivel	1.76 kNm

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, hydr. adjustable boom 3.90 m, stick 2.25 m, quick change adapter 48 and clamshell model 10 B/0.60 m³ (1,000 mm without ejector).

Undercarriage versions	Weight
A 914 C Litronic with stabilizer blade	21,000 kg
A 914 C Litronic with 2 pt. outriggers	21,400 kg
A 914 C Litronic with stabilizer blade + 2 pt. outriggers	22,500 kg
A 914 C Litronic with 4 pt. outriggers	22,900 kg

Clamshell Model 10 B Machine stability per ISO 10567* (75% of tipping capacity)

Width of shells mm	Capacity m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
320 ¹⁾	0.17	770	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ¹⁾	0.22	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ¹⁾	0.35	860	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ¹⁾	0.45	910	□	□	△	■	□	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	0.60	970	■	■	▲	▲	△	▲	▲	■	▲	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	1.00	1,040	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	△	■	■	□	□	□	□	□	□	□
1,500 ¹⁾	1.50	1,160	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	■	□	□	△
1,800 ¹⁾	1.80	1,280	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	■	▲	▲	▲	△	△	■
320 ²⁾	0.17	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ²⁾	0.22	880	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ²⁾	0.35	950	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ²⁾	0.45	1,010	□	△	■	▲	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75% of tipping or 87% of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ without ejector


²⁾ with ejector

- = ≤ 1.8 t/m³ max. material weight
- △ = ≤ 1.5 t/m³ max. material weight
- = ≤ 1.2 t/m³ max. material weight
- ▲ = not authorized

Clamshell Attachment A 924 C

Litronic®

with Hydr. Adjustable Boom 3.90 m

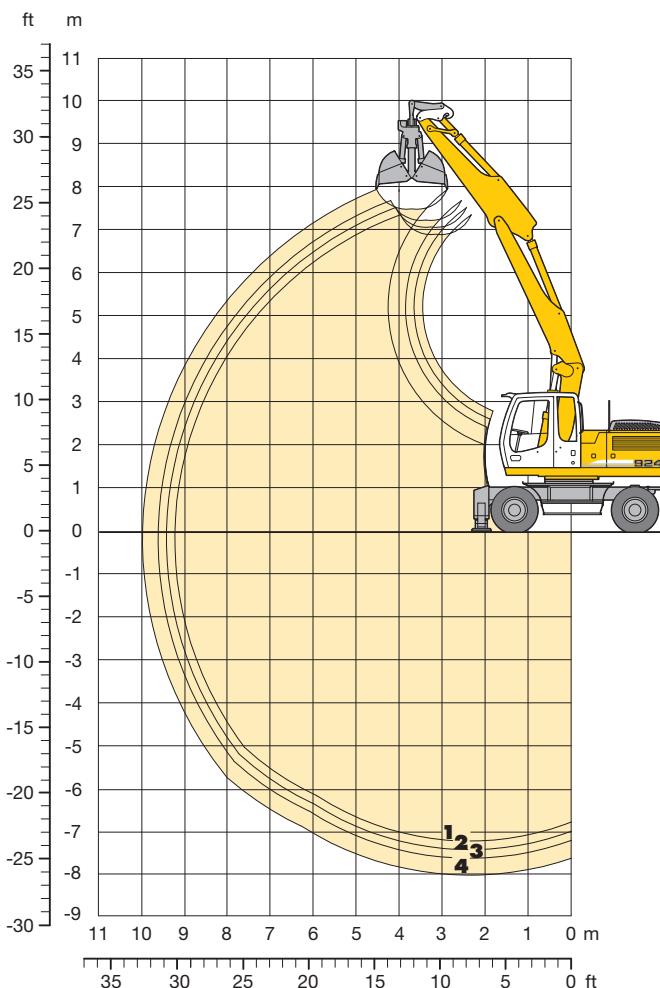

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	7.10	7.30	7.50	7.90
Max. reach at ground level	m	9.20	9.40	9.60	9.95
Max. dumping height	m	6.95	7.10	7.25	7.50

Clamshell Model

10 B

Max. tooth force	73 kN (7.4 t)
Max. torque of hydr. swivel	1.76 kNm

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, hydr. adjustable boom 3.90 m, stick 2.25 m, quick change adapter 48 and clamshell model 10 B/0.60 m³ (1,000 mm without ejector).

Undercarriage versions	Weight
A 924 C Litronic with stabilizer blade	23,400 kg
A 924 C Litronic with 2 pt. outriggers	23,800 kg
A 924 C Litronic with stabilizer blade + 2 pt. outriggers	25,100 kg
A 924 C Litronic with 4 pt. outriggers	25,600 kg

Clamshell Model 10 B Machine stability per ISO 10567* (75% of tipping capacity)

Width of shells mm	Capacity m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
320 ¹⁾	0.17	770	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ¹⁾	0.22	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ¹⁾	0.35	860	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ¹⁾	0.45	910	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	0.60	970	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	1.00	1,040	□	△	△	■	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□
1,500 ¹⁾	1.50	1,160	▲	▲	▲	▲	■	■	▲	▲	□	△	△	△	□	□	□	□	△	□	□	△
1,800 ¹⁾	1.80	1,280	▲	▲	▲	▲	▲	▲	▲	▲	■	■	■	■	□	△	△	□	□	△	△	■
320 ²⁾	0.17	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ²⁾	0.22	880	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ²⁾	0.35	950	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ²⁾	0.45	1,010	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75% of tipping or 87% of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

1) without ejector

2) with ejector

□ = ≤ 1.8 t/m³ max. material weight

△ = ≤ 1.5 t/m³ max. material weight


■ = ≤ 1.2 t/m³ max. material weight

▲ = not authorized

Clamshell Attachment A 914 C

Litronic®

with Gooseneck Boom 5.65 m

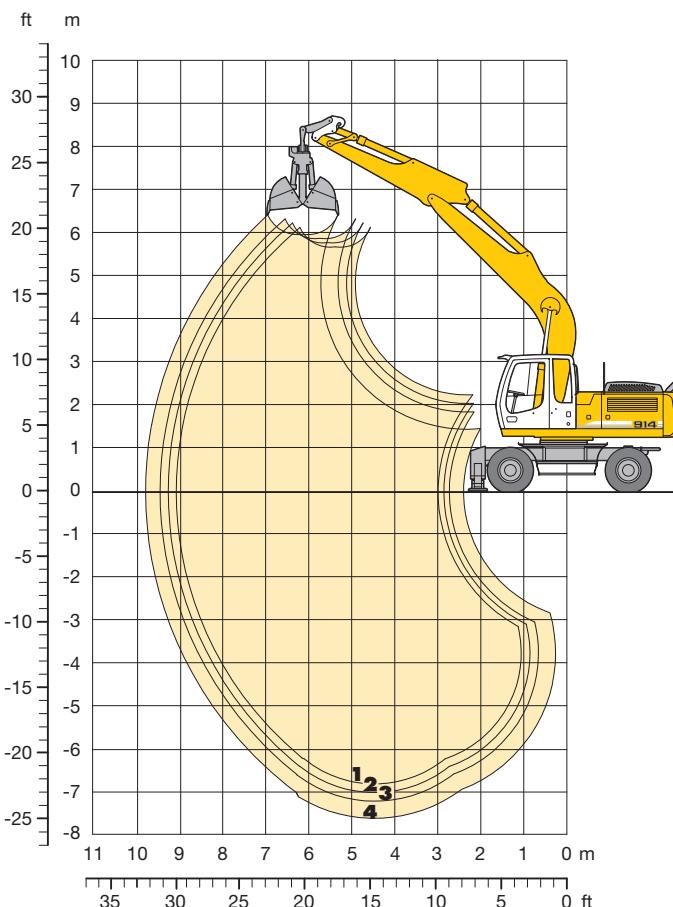

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	6.80	7.00	7.20	7.60
Max. reach at ground level	m	9.10	9.25	9.45	9.80
Max. dumping height	m	5.65	5.75	5.85	5.95

Clamshell Model

10 B

Max. tooth force	73 kN (7.4 t)
Max. torque of hydr. swivel	1.76 kNm

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, gooseneck boom 5.65 m, stick 2.25 m, quick change adapter 48 and clamshell model 10 B/0.60 m³ (1,000 mm without ejector).

Undercarriage versions	Weight
A 914 C Litronic with stabilizer blade	20,400 kg
A 914 C Litronic with 2 pt. outriggers	20,800 kg
A 914 C Litronic with stabilizer blade + 2 pt. outriggers	21,900 kg
A 914 C Litronic with 4 pt. outriggers	22,200 kg

Clamshell Model 10 B Machine stability per ISO 10567* (75% of tipping capacity)

Width of shells mm	Capacity m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down				
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	
320 ¹⁾	0.17	770	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
400 ¹⁾	0.22	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
600 ¹⁾	0.35	860	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
800 ¹⁾	0.45	910	□	□	△	■	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	
1,000 ¹⁾	0.60	970	■	■	▲	▲	△	▲	△	■	■	□	□	□	□	□	□	□	□	□	□	□	
1,000 ¹⁾	1.00	1,040	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	△	■	■	□	□	□	□	□	□	□	
1,500 ¹⁾	1.50	1,160	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	■	□	□	△	
1,800 ¹⁾	1.80	1,280	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	■	▲	▲	▲	△	□	△	■
320 ²⁾	0.17	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
400 ²⁾	0.22	880	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
600 ²⁾	0.35	950	□	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
800 ²⁾	0.45	1,010	□	△	■	▲	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□	□	

* Indicated loads are based on ISO 10567 and do not exceed 75% of tipping or 87% of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

¹⁾ without ejector


²⁾ with ejector

- = ≤ 1.8 t/m³ max. material weight
- △ = ≤ 1.5 t/m³ max. material weight
- = ≤ 1.2 t/m³ max. material weight
- ▲ = not authorized

Clamshell Attachment A 924 C

Litronic®

with Gooseneck Boom 5.65 m

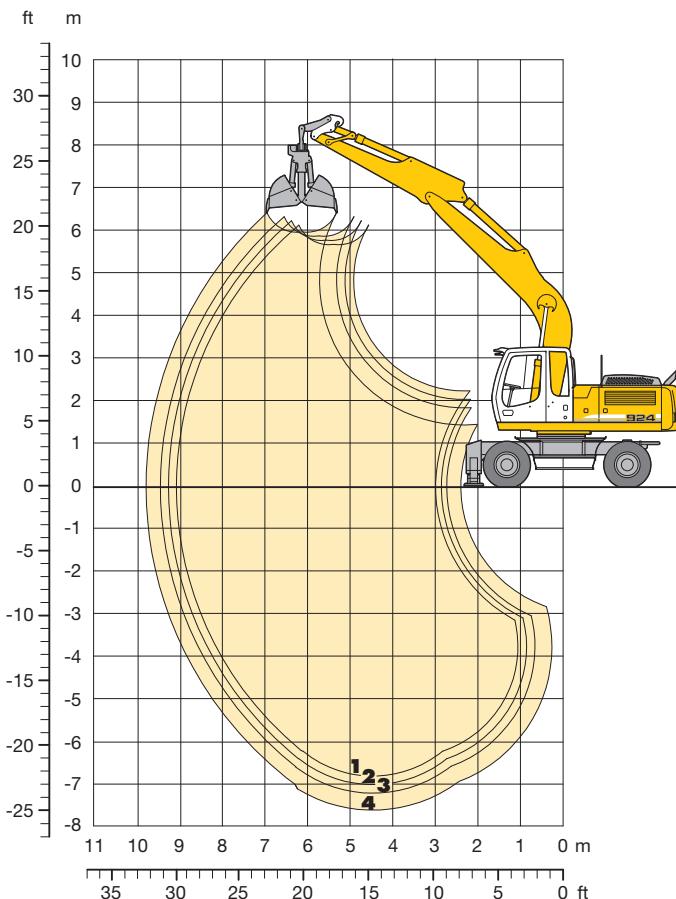

Digging Envelope with Quick Change Adapter

	1	2	3	4	
Stick length	m	2.25	2.45	2.65	3.05
Max. digging depth	m	6.80	7.00	7.20	7.60
Max. reach at ground level	m	9.10	9.25	9.45	9.80
Max. dumping height	m	5.70	5.80	5.90	6.00

Clamshell Model

10 B

Max. tooth force	73 kN (7.4 t)
Max. torque of hydr. swivel	1.76 kNm

Operating Weight

The operating weight includes the basic machine with 8 tires plus spacer rings, gooseneck boom 5.65 m, stick 2.25 m, quick change adapter 48 and clamshell model 10 B/0.60 m³ (1,000 mm without ejector).

Undercarriage versions	Weight
A 924 C Litronic with stabilizer blade	22,900 kg
A 924 C Litronic with 2 pt. outriggers	23,300 kg
A 924 C Litronic with stabilizer blade + 2 pt. outriggers	24,600 kg
A 924 C Litronic with 4 pt. outriggers	25,100 kg

Clamshell Model 10 B Machine stability per ISO 10567* (75% of tipping capacity)

Width of shells mm	Capacity m ³	Weight kg	Stabilizers raised				Stabilizer blade down				2 pt. outriggers down				Stabilizer blade + 2 pt. outriggers down				4 pt. outriggers down			
			Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)				Stick length (m)			
			2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05	2.25	2.45	2.65	3.05
320 ¹⁾	0.17	770	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ¹⁾	0.22	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ¹⁾	0.35	860	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ¹⁾	0.45	910	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	0.60	970	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
1,000 ¹⁾	1.00	1,040	□	△	△	■	□	□	□	□	△	□	□	□	□	□	□	□	□	□	□	□
1,500 ¹⁾	1.50	1,160	▲	▲	▲	▲	■	■	▲	▲	□	△	△	△	□	□	□	□	△	□	□	△
1,800 ¹⁾	1.80	1,280	▲	▲	▲	▲	▲	▲	▲	▲	△	■	■	■	□	□	□	□	△	■	□	△
320 ²⁾	0.17	820	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
400 ²⁾	0.22	880	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
600 ²⁾	0.35	950	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
800 ²⁾	0.45	1,010	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□

* Indicated loads are based on ISO 10567 and do not exceed 75% of tipping or 87% of hydraulic capacity, max. stick length without quick change adapter, lifted 360° on firm with blocked oscillating axle

1) without ejector

2) with ejector

- = ≤ 1.8 t/m³ max. material weight
- △ = ≤ 1.5 t/m³ max. material weight
- = ≤ 1.2 t/m³ max. material weight
- ▲ = not authorized

Equipment

 Undercarriage	914	924	 Operator's Cab	914	924
2-circuit brake system	•	•	Hourmeter, readable from the outside	•	•
Support individually controllable	+	+	Roof window	•	•
Tires Mitas EM 22	•	•	Travel alarm	+	+
Wide gauge 2.75 m	—	•	Fire extinguisher	+	+
Travel speed levels (four)	•	•	Bottle holder	•	•
Piston rod protection support cylinders	+	+	FOPS cab protection system	+	+
Powershift transmission	•	•	Slide-in front window	•	•
Parking brake, maintenance-free	•	•	Floor mat removable	•	•
Tire variants, various	+	+	Display, large, for all indicating, monitoring and warning functions	•	•
Pipe fracture safety on support cylinders	•	•	Coat hook	•	•
Custom paintwork undercarriage	+	+	Automatic climate control	•	•
Speeder*	+	+	Consoles and seat adjustable separately or in combination	•	•
Tool box on both sides, lockable	•	•	Cooler, electrical	+	+
Central lubrication undercarriage	+	+	Steering column adjustable horizontally	•	•
			LIDAT***	+	+
 Uppercarriage	914	924	Liebherr proportional controls	+	
Refueling pump, electrical	+	+	Automatic engine shut-down (time adjustable)	+	+
Main battery switch for electrical system	•	•	Bullet proof glass (front and top)	+	+
Engine hood with gas spring	•	•	Radio system	+	+
Uppercarriage doors, lockable	•	•	Smokers package	•	•
Uppercarriage lock electro-hydraulically activated from the cab	•	•	Rear view camera**	•	•
Beacon on engine hood	+	+	Back-up alarm	+	+
Custom paintwork uppercarriage	+	+	Beacon	+	+
Power socket 12 V, 20 A	+	+	Tainted glass	•	•
Central lubricating system, automatic	+	+	Windshield washer	•	•
Central lubricating system, semi-automatic	•	•	Rear wiper	+	+
			Wiper lower front window	+	+
 Hydraulics	914	924	Sliding window in the door	•	•
Stop cock between hydraulic tank and pump(s)	•	•	Sun roller blind	•	•
Pressure test fittings	•	•	Auxiliary heater with timer	+	+
Accumulator for controlled lowering of the attachment with the engine shut down	•	•	Immobilizer electronic (key code)	+	+
Hydraulic oil from -20 °C to +40 °C	•	•	Xenon headlights (front resp. rear)	+	+
Hydraulic oil filter with integrated microfilter	•	•	Auxiliary headlights (front resp. rear)	+	+
Hydraulic oil pre-heating	+	+			
Liebherr hydraulic oil, biologically degradable	+	+			
Liebherr hydraulic oil, specially for warm and cold regions	+	+			
Mowing bucket and mulcher operation	+	+			
Bypass filter	+	+			
Change-over for controls (hammer/shear operation via pedals or joystick)	+	+			
 Engine	914	924			
Fuel theft protection	+	+	 Attachment	914	924
Fuel preheating	+	+	Main boom, adjustable in height	+	+
Coolant preheating 230 V	+	+	Slope attachment	+	+
Liebherr particle filter	+	+	Function hammer/shear operation incl. tubing	+	+
Fan drive, reversible	+	+	Grapple sticks	+	+
Air pre-cleaner	+	+	Hoist limitation, electronic	+	+

* = Standard, + = Option, - = not available

* = not available in all countries, ** = country-dependent, *** = starting mid 2010

Options and/or special attachments, supplied by vendors other than Liebherr, are only to be installed with the knowledge and approval of Liebherr to retain warranty.

Liebherr-Hydraulikbagger GmbH

Liebherrstraße 12, D-88457 Kirchdorf/Ille

+49 7354 80-0, Fax +49 7354 80-72 94

www.liebherr.com, E-Mail: info.lhb@liebherr.com