

# KOBELCO®

## SK210LC ACERA MARK 8



**Operating Weight**  
47,800 lbs (21,700 kg)

**NET Horsepower**  
150 hp @ 2,000 rpm  
(112 kW @ 2,000 rpm)

**Max Digging Depth**  
22'0" (6.70 m)

**Bucket Capacity**  
.63 to 1.80 cu yd  
(.48 to 1.4 m<sup>3</sup>)

**Bucket Breakout Force**  
(SAE) 31,700 lbf (141 kN)  
(ISO) 34,613 lbf (154 kN)

## A NEW LEVEL OF PRODUCTIVITY AND CONTROL

Kobelco continues to set the standard for jobsite performance and operator control. The new SK210LC Acera Mark 8 hydraulic excavator uses technology borrowed from the SK350LC to deliver unsurpassed digging performance with unmatched precision control. That makes it perfect for applications that require maximum power for digging and fine control for grading and leveling.

### A Cab Designed Around You, the Operator

- Oversized cab provides ample room and numerous comfort features
- Operator visibility is excellent in all directions, with minimal obstructions
- New control locations provide easy access to critical functions
- Climate-controlled A/C & heating system is perfect for all climates

### Powerful Productivity

Kobelco's industry-leading performance numbers just got even better

- Increased horsepower and efficiency delivers pure performance
- 10% more Swing Torque for moving fully loaded buckets
- Independent Travel provides more control when carrying a load and traveling
- An astounding 6,800 lb. increase in Drawbar Pull force gives you the confidence to climb a grade while carrying a heavy load
- Arm Digging force has also been increased by 6% for more strength coming out of the hole or trench

### Proven System Power

- Reliable 409 cu. in. (6.7 L), 6-cylinder water-cooled, turbocharged engine
- 150 (SAE) Net engine horsepower (112 kW) @ 2,000 rpm
- 10% more power with “no time limit” from our Power Boost™ system
- 10% more power with “no time limit” from our Heavy Lift system
- Top Notch warranty and support from our Kobelco dealer network

Kobelco builds high performance excavators that are the envy of our competitors. When you buy or rent a new Kobelco SK210LC Acera Mark 8 excavator, you're getting power, comfort and reliability, all in a proven excavator design. See your Kobelco dealer for a demonstration or visit [www.kobelcoamerica.com](http://www.kobelcoamerica.com) to find the dealer nearest you.



Easy, ground-level servicing of filters, batteries and hydraulics reduces maintenance time to boost your productivity.

Spacious dimensions and an unrivaled view make the Kobelco cab a comfortable and productive place to work.





The SK210LC provides superior bucket and arm digging forces so you can easily handle the most demanding digging conditions.





The operator seat adjusts seven ways to fit operators of any size.

Diagnostic system monitors vital functions and provides you with complete operating information.

## SK210LC

### SUPERIOR VISIBILITY AND CONTROL

Let's face it, you can't perform at your best if you're not comfortable. Kobelco has gone to the extremes to ensure that our customers enjoy operating our excavators. The SK210LC delivers complete operational control, maximum comfort, progressive hydraulic acceleration and a 360 degree view. The perfect combination for a very productive day.

#### Near-Perfect Visibility

- Large glass panels on all sides of the cab provide a clear view
- Operator is positioned for maximum visibility of all functions and operations

#### Comfortable Seating

- 7-position suspension seat provides adjustment for maximum comfort
- Viscous silicon cab mounts minimize vibration and shock to the cab
- Wide entry/exit area provides easy access to the roomy cab
- AM/FM stereo with dual speakers is standard
- 24 volt to 12 volt converter for charging cell phones and other accessories

#### Enhanced Controllability

- Intelligent Total Control System (ITCS) recognizes your moves and assists with smooth engagements and disengagements
- Auto-acceleration system smoothly increases engine rpms to full speed in proportion to the operator's movement of the control levers. This results in even, deliberate acceleration for precise operations
- Heavy Lift mode provides additional power for lifting heavy loads
- Power Boost provides increased force for heavy bucket digging
- Independent travel circuit, exclusive to North American Kobelco products, provides dedicated flow for excavator travel

#### Easy-to-Read Instruments

- Central gauge cluster includes work mode selector switch, fuel and temperature gauges, and an orange backlit multi-display with large sun shade
- Self-diagnostics with fault code memory makes it easy to monitor and adjust system pressures, speeds other operating functions
- Warning screens and alarms alert you to temperature and pressure status
- Establish and review service intervals for engine oil, hydraulic oil, fuel and filters



Operators work with confidence and ease with a clear view of the jobsite.



A personal climate control console includes an LCD display and controls for the high-output air conditioning and heating system and the four-speed fan. Just program a temperature between 64 and 90 degrees F (18 to 32 C) for optimum comfort any time of year.



## REPOWERED FOR PERFORMANCE

To meet Tier III engine requirements we've repowered the SK210LC with a proven power train technology 150 net horsepower 6-cylinder, direct injected diesel engine with intercooler turbocharger. This engine features 490 ft-lbs of torque (Net) at 1,200 rpm, a 14% increase in torque over the previous SK210.

### Power Mode Selection

Provides four modes for work operation:

- **H Mode** Heavy-duty excavation work, gives priority to the workload at high speed (default mode)
- **S Mode** Standard digging and loading work, provides fuel savings
- **B Mode** Breaker work (1-way hydraulic flow)
- **A Mode** Demolition work with crusher/nibbler-breaker (2-way /1 or 2 pump flow)

Change modes easily on the readout display

### Auto Warm-up System

Our auto warm-up system is designed to warm-up the hydraulic circuit to an optimum 126 degree (F). Kobelco recommends using this system whenever ambient temperatures drop below 50 degrees (F). This feature improves the efficiency of your hydraulic system so you can focus on productivity.

### Auto Acceleration System

If not used for more than 4 seconds, the SK210LC engine will automatically Decelerate to 1,200 rpms or, the range or setting pre-programmed by operator. This saves costly fuel, extends service intervals and provides longer engine life. Auto Acceleration increases engine rpm proportionally and in direct response to movement of the control lever by operator. This gives YOU power ***"on command, without lag"***.

### Smooth, Powerful Hydraulic Performance

Kobelco provides performance features that are unmatched by the competition.

- Power Boost™ provides 10% more bucket breakout force, ***"without time limit"***
- Heavy Lift provides 10% more lifting capability, ***"without time limit"***
- Boom and arm holding valves minimize drift for accurate positioning
- Standard high-flow valve can be switched between one-pump flow to two-pump flow from inside the cab
- Hydraulic flow has been increased by 5.6% for improved flow and performance


### Designed with attachments in mind

Kobelco doesn't just design excavators, we design excavators for use with attachments.


- High-capacity hydraulics with in-cab adjustment
- Standard one- or two-way auxiliary valve
- Two auxiliary hydraulic modes for easy in-cab switching between one- and two-way flow (with auxiliary hydraulics installed)
- Optional independent flow and dedicated pump for multi-function attachments that include thumbs or twist buckets

The hydraulic feed to the main pumps is positioned to draw fluid from the side of the hydraulic tank - rather than the tank bottom like many competitors. The hydraulic system utilizes a high capacity, small particle filtration system to provide industry leading maintenance intervals.

Side-by-side radiator, oil cooler and intercooler can be accessed easily for inspection and cleaning. The side-by-side design allows the components to be removed independently. This means the radiator can be removed for service without draining the hydraulic system.

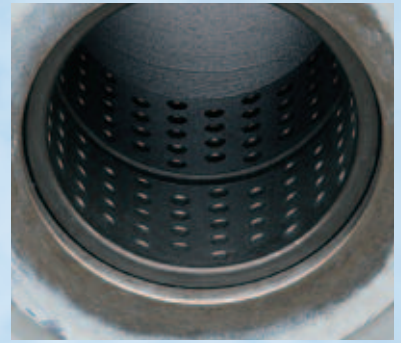

Flanged brass bucket bushings provide long life and extended maintenance intervals.

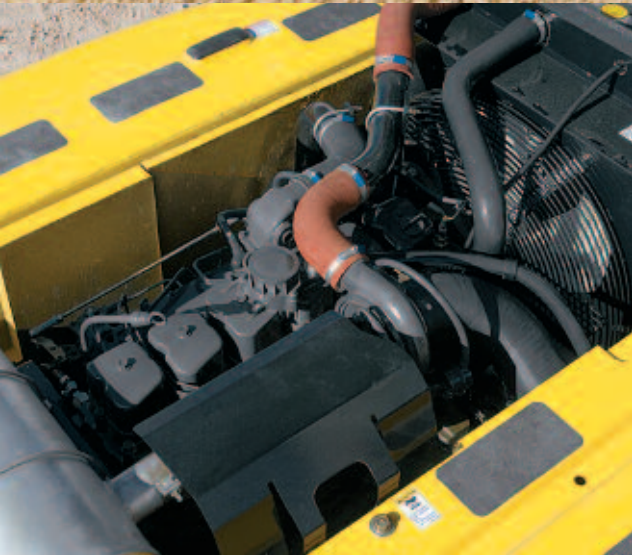


Dependable 409 cu. in. (6.7 L) 6-cylinder turbo-charged engine produces 490 ft.-lbs (666 N•m) of torque.

The Power mode system provides four power modes to match your work operations. The monitor features a large sunshade and orange back-lit screen for easy viewing.



# SK210LC DIMENSIONS, WEIGHTS & BUCKET SELECTION CHART

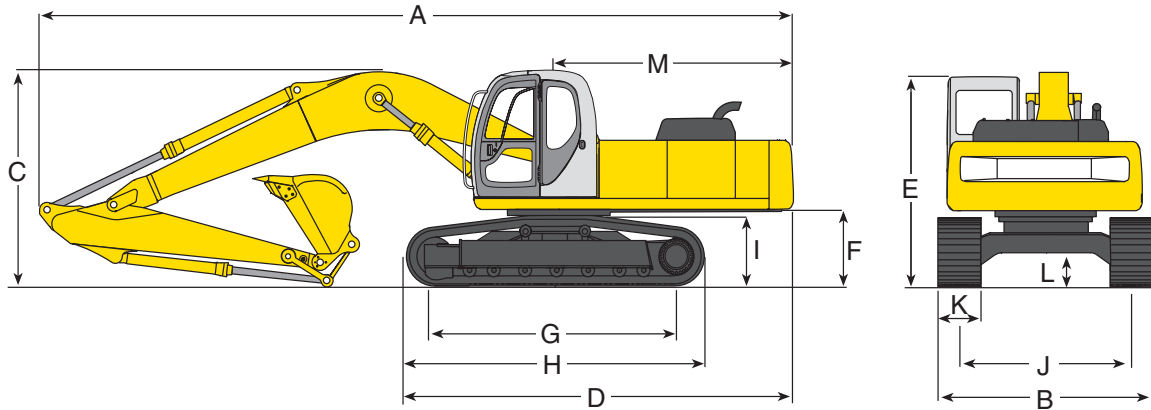

## DIMENSIONS: SK210LC Unit ft-in (m)

ARM LENGTH	9' 8" (2.94)	11' 6" (3.50)
A. Overall length	31' 0" (9.45)	31' 1" (9.52)
B. Overall width (with 800mm shoe)	10' 6" (3.19)	10' 6" (3.19)
C. Overall height (to top of boom)	9' 11" (3.03)	10' 5" (3.18)
D. Basic machine length	16' 4" (4.98)	16' 4" (4.98)
E. Overall height (to top of cab)*	9' 7" (2.93)	9' 7" (2.93)
F. Ground clearance of rear end*	3' 6" (1.06)	3' 6" (1.06)
G. Center distance of tumbler	12' 0" (3.66)	12' 0" (3.66)
H. Overall length of crawler	14' 7" (4.45)	14' 7" (4.45)
I. Crawler height at tumbler center*	37' 8" (960 mm)	37' 8" (960 mm)
J. Track gauge	7' 10" (2.39)	7' 10" (2.39)
K. Width of crawler shoe	31.5" (800 mm)	31.5" (800 mm)
L. Ground clearance of undercarriage*	17.7" (450 mm)	17.7" (450 mm)
M. Tail swing radius	9' 0" (2.75)	9' 0" (2.75)

\*Excludes height of grouser bar.

## WEIGHTS: SK210LC with 9'8" std. HD arm, 31.5" 3-bar tracks and bucket weighing 1,430 lbs (650 kg)

SHOE WIDTH	in (mm)	35.4" (900)	31.5" (800)
Machine overall width	ft-in (mm)	10' 10" (3.290)	10' 6" (3.190)
Ground pressure	psi (kg/cm <sup>2</sup> )	4.4 (0.309)	4.9 (0.34)
Operating weight	lb (kg)	48,300 (21,900)	47,800 (21,700)

SHOE WIDTH	in (mm)	27.6" (700)
Machine overall width	ft-in (mm)	10' 2" (3.090)
Ground pressure	psi (kg/cm <sup>2</sup> )	5.52 (0.39)
Operating weight	lb (kg)	47,200 (21,400)

## HYDRAULIC SYSTEM

Main Pumps	Tandem inline variable displacement		
Max discharge flow	US gal/min (L/min)	2 x 58.1	(2 x 220)
Auxiliary pump output	US gal/min (L/min)	1 x 5.3	(1 x 220)
Operating Pressure:			
	Implement	psi (MPa)	4,970 (34.3)
	Travel	psi (MPa)	4,970 (34.3)
	Swing	psi (MPa)	4,210 (29.0)
	Power Boost/Heavy lift	psi (MPa)	5,480 (37.8)
	Pilot control circuit	psi (MPa)	725 (5.0)
Control valves	8 spool		

## BUCKET SELECTION CHART

Bucket Duty	Capacity (SAE)		Width		Bucket		Arm ft-in (m)	
	Cubic Yard	(m <sup>3</sup> )	Inches	(m)	Weight lb	(kg)	9'8" (2.94)	11'6" (3.5)
GENERAL	.91	(.695)	30"	(.762)	1,325	(601)	H	H
	1.14	(.871)	36"	(.914)	1,450	(658)	H	M
	1.37	(1.047)	42"	(1.066)	1,651	(749)	M	L
	1.6	(1.223)	48"	(1.219)	1,780	(807)	L	X
	1.8	(1.38)	54"	(1.371)	2,019	(916)	L	X
HEAVY DUTY	.68	(.519)	24"	(.609)	1,250	(567)	H	H
	.91	(.695)	30"	(.762)	1,420	(644)	H	M
	1.14	(.871)	36"	(.914)	1,560	(708)	M	L
	1.37	(1.04)	42"	(1.066)	1,730	(785)	L	X
	1.6	(1.233)	48"	(1.219)	1,905	(864)	X	X
SEVERE DUTY	.63	(.481)	26"	(.66)	1,455	(660)	H	H
	.75	(.573)	31"	(.787)	1,590	(721)	H	H
	.88	(.672)	37"	(.939)	1,790	(812)	M	M
	1.13	(.871)	43"	(1.092)	2,000	(907)	L	X

H - Used with material weight up to 3,000 lbs/cu yd (1,780 kg/m<sup>3</sup>)


M - Used with material weight up to 2,500 lbs/cu yd (1,483 kg/m<sup>3</sup>)

L - Used with material weight up to 2,000 lbs/cu yd (1,186 kg/m<sup>3</sup>)

X - Not recommended



# SK210LC SPECIFICATIONS

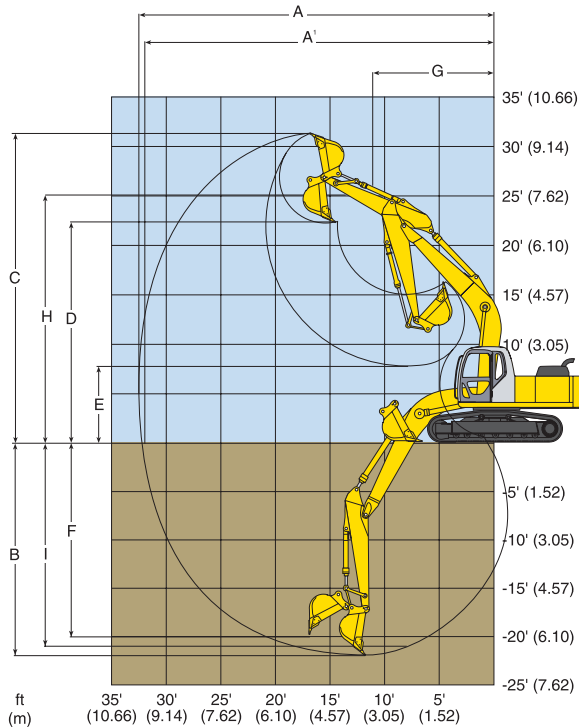

This chart is a graphic representation of the working ranges for the SK210LC equipped with a 9' 8" (2.94 m) arm.

## WORKING RANGES Unit ft-in (m)

### ATTACHMENTS

	Standard Arm 9' 8" (2.94)	Optional Arm 11' 6" (3.5)
A. Max digging reach	32' 6" (9.90)	33' 11" (10.34)
A'. Max digging reach at ground level	31' 11" (9.73)	33' 4" (10.17)
B. Max digging depth	22' 0" (6.70)	23' 10" (7.26)
C. Max digging height	31' 11" (9.73)	32' 0" (9.75)
D. Max dumping clearance	22' 8" (6.91)	22' 10" (6.97)
E. Min dumping clearance	8' 0" (2.43)	6' 2" (1.87)
F. Max vertical wall digging depth	20' 0" (6.1)	21' 3" (6.47)
G. Min front swing radius	11' 7" (3.54)	11' 5" (3.48)
H. Height at min swing radius	25' 2" (7.68)	25' 4" (7.72)
I. Digging depth for 8' (2.4m) flat bottom	21' 5" (6.52)	23' 3" (7.08)

## DIGGING FORCE\* Unit lbf (kN)

		9'8" (2.94 m) Arm	11'6" (3.5 m) Arm
Bucket digging force	ISO	34,613 (154)	34,613 (154)
Bucket digging force	SAE	31,700 (141)	31,700 (141)
Arm crowding force	ISO	24,692 (110)	22,267 (99)
Arm crowding force	SAE	24,500 (109)	22,100 (98)

\*Power Boost engaged

## PERFORMANCE

Travel speed (Turtle)	2.2 mph (3.6 km/h)
Travel speed (Rabbit)	3.7 mph (6.0 km/h)
Swing speed	12.5 rpm
Gradeability	35 degrees (70%)
Drawbar pulling force	51,500 lbf (229 kN)

## REFILLING CAPACITIES Unit: US gal (liters)

Fuel tank	97.7 (370)
Hydraulic oil reservoir	38.6 (146)
Hydraulic system including oil reservoir	60.8 (230)
Cooling system	6.9 (26)
Engine oil	5.3 (20)

## SPECIFICATION SUMMARY

### GENERAL

Operating weight with Bucket	lb (kg)	47,800 (21,700)
Bucket Capacity Range	cu yd (m <sup>3</sup> )	.63-1.8 (.48-1.4)
Counterweight	lb (kg)	10,230 (4,639)

### ENGINE

Make and Model	F4GE9684E-J6	
Displacement	cu in (L)	409 (6.7)
Bore and Stroke	in (mm)	4.09"x5.20" (104x132)
Horsepower SAE NET	HP/RPM (KW/RPM)	150@2,000 (112@2,000)
Max Torque	lbf-ft (N•m)	490@1,200 (666@1,200)

### HYDRAULIC SYSTEM

Hydraulic Pumps	Tandem Variable Displacement	2VP+1FG
Pilot Pump	gpm (L/m)	1x5.3 (1x20)
Rated Oil Flow	gpm (L/m)	2x58.1 (2x220)
Operating Pressure	Implement-psi (MPa)	4,970 (34.3)

### UNDERCARRIAGE

Track Overall Length	ft-in (m)	14' 7" (4.45)
Track Overall Width w/Std. Shoe	ft-in (m)	10' 6" (3.19)
Track Shoe	in (mm)	31.5" (800)
Travel Speed	mph (km/h)	3.7/2.2 (6.0/3.6)
Draw Bar Pull	lb (kg)	51,500 (299)
Ground Bearing Pressure	psi (Kpa)	4.9 (0.34)
Ground Clearance	in (mm)	17.7" (450)

### SWING

Swing Speed	rpm	12.5
Tail Swing Radius	ft-in (m)	9' 0" (2.73)
Swing Torque	lb-ft (kN • m)	52,700 (71.5)


### SHIPPING DIMENSIONS

Height	ft-in (m)	9' 11" (3.03)
Width w/Std. Shoe	ft-in (m)	10' 6" (3.19)
Length	ft-in (m)	31' 0" (9.45)

**ACERA**  
**Mark 8™**

# SK210LC LIFT CAPACITIES — 9' 8" Arm

## LIFTING CAPACITY DIAGRAM

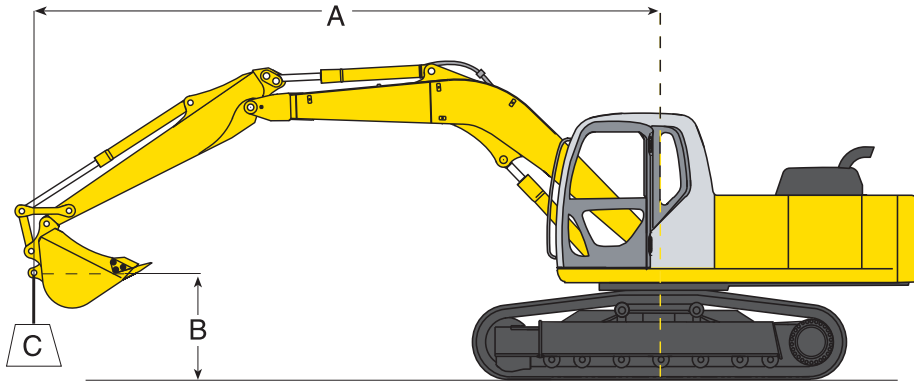

- A Reach swing centerline to bucket hook
- B Bucket hook height above/below ground
- C Lifting capacities in pounds and kilograms
  - Max discharge pressure: 5,480 psi (385 kg/cm<sup>2</sup>)
  - Track shoe: 31.5" (800 mm) Triple grouser
  - Boom: 18' 6" (5.65 m)

## LIFTING CAPACITY — 31.5" (800 mm) triple grouser shoe

Based on machine equipped with — Arm: 9' 8" (2.94 m) Bucket: SAE heaped 1.05 cu. yd. (.080 m<sup>3</sup>) bucket

B	A	LIFT POINT RADIUS										AT MAX. REACH		
		5' (1.5 m)		10' (3.0 m)		15' (4.6 m)		20' (6.1 m)		25' (7.6 m)		RADIUS		
														RADIUS
25' (7.6 m)	lb kg							*7,990 *3,620	*7,990 *3,620			*7,110 *3,220	*7,110 *3,220	20' 5" (6.23 m)
20' (6.1 m)	lb kg							*11,270 *5,110	11,050 5,010			*6,690 *3,030	*6,690 *3,030	24' 2" (7.37 m)
15' (4.6 m)	lb kg							*12,420 *5,630	10,620 4,810	*10,210 *4,630	7,150 3,240	*6,690 *3,030	6,410 2,900	26' 5" (8.06 m)
10' (3.0 m)	lb kg			*28,490 *12,920	*28,490 *12,920	*18,240 *8,270	15,830 7,180	*14,300 *6,480	9,990 4,530	11,140 5,050	6,870 3,110	*7,020 *3,180	5,710 2,590	27' 8" (8.43 m)
5' (1.5 m)	lb kg			*17,460 *7,910	*17,460 *7,910	*22,200 *10,070	14,480 6,570	15,470 7,010	9,350 4,240	10,790 4,890	6,550 2,970	*7,700 *3,490	5,430 2,460	27' 11" (8.51 m)
Ground Level	lb kg			*19,420 *8,800	*19,420 *8,800	24,060 10,910	13,670 6,200	14,940 6,770	8,880 4,020	10,520 4,770	6,300 2,860	*8,920 *4,040	5,500 2,490	27' 3" (8.30 m)
-5' (-1.5 m)	lb kg	*17,010 *7,710	*17,010 *7,710	*27,300 *12,380	26,470 12,000	23,720 10,750	13,390 6,070	14,680 6,660	8,660 3,920	10,420 4,720	6,210 2,810	10,060 4,560	6,000 2,720	25' 7" (7.80 m)
-10' (-3.0 m)	lb kg	*25,890 *11,740	*25,890 *11,740	*32,510 *14,740	26,890 12,190	*22,610 *10,250	13,490 6,110	14,740 6,680	8,710 3,950			12,140 5,500	7,250 3,280	22' 8" (6.92 m)
-15' (-4.6 m)	lb kg			*24,850 *11,270	*24,850 *11,270	*17,670 *8,010	13,980 6,340					*13,950 *6,320	10,580 4,790	18' 0" (5.50 m)



Rating over front















Rating over side/360 degrees

### Notes:

1. Do not attempt to lift or hold any load that exceeds these rated values at their specified load radii and heights. Weight of all accessories must be deducted from the above lifting capacities.
2. Lifting capacities assume a machine standing on a level, firm, and uniform supporting surface. Operator must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, inexperienced personnel, weight of various other buckets, lifting slings, attachments, etc.
3. Ratings at bucket lift hook.
4. The above rated loads are in compliance with SAE Hydraulic Excavator Lift Capacity Standard J 1097. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Rated loads marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
5. Operator should be fully acquainted with the Operator's and Maintenance Manuals before operating this machine. Rules for safe operation of equipment should be followed at all times.
6. Capacities apply only to the machine as originally manufactured and normally equipped by KOBELCO Construction Machinery America LLC.













## LIFTING CAPACITY – 27.6" (700 mm) triple grouser shoe

Based on machine equipped with — Arm: 9' 8" (2.94 m) Bucket: SAE heaped 1.05 cu. yd. (.080 m<sup>3</sup>) bucket

A		LIFT POINT RADIUS										AT MAX. REACH		
		5' (1.5 m)		10' (3.0 m)		15' (4.6 m)		20' (6.1 m)		25' (7.6 m)				
B	C													RADIUS
		25' (7.6 m)	lb							*7,990	*7,990			*7,110
	kg							*3,620	*3,620			*3,220	*3,220	(6.23 m)
20' (6.1 m)	lb							*11,270	10,920			*6,690	*6,690	24' 2"
	kg							*5,110	4,950			*3,030	*3,030	(7.37 m)
15' (4.6 m)	lb							*12,420	10,490	*10,210	7,060	*6,690	6,320	26' 5"
	kg							*5,630	4,760	*4,630	3,200	*3,030	2,860	(8.06 m)
10' (3.0 m)	lb			*28,490	*28,490	*18,240	15,640	*14,300	9,860	10,990	6,770	*7,020	5,630	27' 8"
	kg			*12,920	*12,920	*8,270	7,090	*6,480	4,470	4,980	3,070	*3,180	2,550	(8.43 m)
5' (1.5 m)	lb			*17,460	*17,460	*22,200	14,300	15,270	9,220	10,640	6,450	*7,700	5,340	27' 11"
	kg			*7,910	*7,910	*10,070	6,480	6,920	4,180	4,820	2,920	*3,490	2,420	(8.51 m)
Ground Level	lb			*19,420	*19,420	23,740	13,490	14,730	8,750	10,370	6,210	*8,920	5,410	27' 3"
	kg			*8,800	*8,800	10,770	6,110	6,680	3,970	4,700	2,810	*4,040	2,450	(8.30 m)
-5' (-1.5 m)	lb	*17,010	*17,010	*27,300	26,130	23,400	13,200	14,480	8,530	10,270	6,110	9,910	5,910	25' 7"
	kg	*7,710	*7,710	*12,380	11,850	10,610	5,990	6,560	3,870	4,650	2,770	4,490	2,680	(7.80 m)
-10' (-3.0 m)	lb	*25,890	*25,890	*32,510	26,550	*22,610	13,300	14,540	8,580			11,970	7,140	22' 8"
	kg	*11,740	*11,740	*14,740	12,040	*10,250	6,030	6,590	3,890			5,420	3,230	(6.92 m)
-15' (-4.6 m)	lb			*24,850	*24,850	*17,670	13,790					*13,950	10,440	18' 0"
	kg			*11,270	*11,270	*8,010	6,250					*6,320	4,730	(5.50 m)

## LIFTING CAPACITY – 35.4" (900 mm) triple grouser shoe













Based on machine equipped with — Arm: 9' 8" (2.94 m) Bucket: SAE heaped 1.05 cu. yd. (.080 m<sup>3</sup>) bucket

A		LIFT POINT RADIUS										AT MAX. REACH		
		5' (1.5 m)		10' (3.0 m)		15' (4.6 m)		20' (6.1 m)		25' (7.6 m)				
B	C													RADIUS
		25' (7.6 m)	lb							*7,990	*7,990			*7,110
	kg							*3,620	*3,620			*3,220	*3,220	(6.23 m)
20' (6.1 m)	lb							*11,270	11,160			*6,690	*6,690	24' 2"
	kg							*5,110	5,060			*3,030	*3,030	(7.37 m)
15' (4.6 m)	lb							*12,420	10,730	*10,210	7,240	*6,690	6,490	26' 5"
	kg							*5,630	4,860	*4,630	3,280	*3,030	2,940	(8.06 m)
10' (3.0 m)	lb			*28,490	*28,490	*18,240	15,990	*14,300	10,100	11,270	6,950	*7,020	5,790	27' 8"
	kg			*12,920	*12,920	*8,270	7,250	*6,480	4,580	5,110	3,150	*3,180	2,620	(8.43 m)
5' (1.5 m)	lb			*17,460	*17,460	*22,200	14,650	15,650	9,460	10,920	6,630	*7,700	5,500	27' 11"
	kg			*7,910	*7,910	*10,070	6,640	7,090	4,290	4,950	3,010	*3,490	2,490	(8.51 m)
Ground Level	lb			*19,420	*19,420	24,340	13,840	15,120	8,990	10,650	6,390	*8,920	5,570	27' 3"
	kg			*8,800	*8,800	11,040	6,270	6,850	4,070	4,830	2,890	*4,040	2,520	(8.30 m)
-5' (-1.5 m)	lb	*17,010	*17,010	*27,300	26,770	24,000	13,550	14,860	8,770	10,550	6,290	10,190	6,080	25' 7"
	kg	*7,710	*7,710	*12,380	12,140	10,880	6,140	6,740	3,970	4,780	2,850	4,620	2,750	(7.80 m)
-10' (-3.0 m)	lb	*25,890	*25,890	*32,510	27,190	*22,610	13,650	14,920	8,820			12,290	7,340	22' 8"
	kg	*11,740	*11,740	*14,740	12,330	*10,250	6,190	6,770	4,000			5,570	3,320	(6.92 m)
-15' (-4.6 m)	lb			*24,850	*24,850	*17,670	14,140					*13,950	10,710	18' 0"
	kg			*11,270	*11,270	*8,010	6,410					*6,320	4,850	(5.50 m)















## LIFTING CAPACITY – 27.6" (700 mm) triple grouser shoe

Based on machine equipped with — Arm: 11' 6" (3.5 m) Bucket: SAE heaped 0.92 cu. yd. (.070 m<sup>3</sup>) bucket

A		LIFT POINT RADIUS										AT MAX. REACH		
		5' (1.5 m)		10' (3.0 m)		15' (4.6 m)		20' (6.1 m)		25' (7.6 m)				
B	C													RADIUS
		25'	lb											
(7.6 m)	kg													
20'	lb													
(6.1 m)	kg													
15'	lb													
(4.6 m)	kg													
10'	lb													
(3.0 m)	kg													
5'	lb													
(1.5 m)	kg													
Ground Level	lb													
	kg													
-5'	lb													
(-1.5 m)	kg													
-10'	lb													
(-3.0 m)	kg													
-15'	lb													
(-4.6 m)	kg													
-20'	lb													
(-6.1 m)	kg													

## LIFTING CAPACITY – 35.4" (900 mm) triple grouser shoe

Based on machine equipped with — Arm: 11' 6" (3.5 m) Bucket: SAE heaped 0.92 cu. yd. (.070 m<sup>3</sup>) bucket

A		LIFT POINT RADIUS										AT MAX. REACH		
		5' (1.5 m)		10' (3.0 m)		15' (4.6 m)		20' (6.1 m)		25' (7.6 m)				
B	C													RADIUS
		25'	lb											
(7.6 m)	kg													
20'	lb													
(6.1 m)	kg													
15'	lb													
(4.6 m)	kg													
10'	lb													
(3.0 m)	kg													
5'	lb													
(1.5 m)	kg													
Ground Level	lb													
	kg													
-5'	lb													
(-1.5 m)	kg													
-10'	lb													
(-3.0 m)	kg													
-15'	lb													
(-4.6 m)	kg													
-20'	lb													
(-6.1 m)	kg													

**ACERA**  
**MARK 8™**



## STANDARD EQUIPMENT

- AM/FM radio
- Arm: 9' 8" (2.94 m) with vertical ribbed rock guard, tapped blocks, ready for auxiliary attachments
- Audible warning system for high coolant temperature, low engine oil pressure, clogged air filter and oil replacement interval
- Auxiliary valve with flow control
- Boom, 18' 6" (5.65 m)
- Boom and arm holding (anti-drift) valves
- Cab is die formed, modular steel full-vision, sound insulated, with viscous silicon-filled mounts, windshield wiper, heater and defroster, cigarette lighter, ashtray, floor mat, cab light, control lever lock, tinted skylight with damper cylinder
- Climate control air conditioning/heating system
- Counter weight 10,230 lbs. (4,639 kg)
- Display monitor mounted on multi-function console provides status of following: aging of engine oil, fuel and hydraulic filters, system status, engine preheat, low engine oil pressure, engine coolant temperature, air cleaner restriction, battery charging, fuel level, CPU error and tachometer. Beneath monitor are switches for auto-decel, windshield washer and wiper, mode selector, one/two pump auxiliary hydraulics and swing flashers
- Dual element air cleaner
- Electric horn
- Engine shuts down automatically for low oil pressure
- Heavy duty batteries (2 x12 volt 136 AH)
- Heavy Lift and Power Boost *"without time limit"*
- Hydraulic track adjusters
- Independent travel
- Lifetime lubricated track rollers, idlers and sprockets
- Engine model F4GE9684E-J6
- Mode selection:
  - H Mode — Heavy-duty excavation work
  - S Mode — Standard digging and loading work
  - B Mode — Breaker work
  - A Mode — Demolition work with crusher/nibbler-breaker
- Power outlet, 24 volt to 12 volt converter
- Proportional auto accel system
- Removable clean out screen for radiator
- Removable travel levers with toe tabs
- Self-lubricating bushings in boom foot and boom hoist cylinders
- Service diagnostics:
  - Computer system displays 68 service items 60 event fault code memory, accessible from cab

- Starting motor (24 v/5.0 KW)
- 35 amp alternator
- Straight travel system
- Suspension seat — 7-way adjustable with safety belt
- Swing and travel automatic parking brakes
- Swing flashers recessed into counterweight. Off/on switch located on multi-function console in cab
- Swing priority (trenching system) functions automatically
- Swing shockless valve
- Track shoes: 31.5" (800 mm) semi-triple grouser shoes
- Travel—two speed with automatic shift
- Two lever control for boom, arm, bucket and swing; pilot operated wrist controls and foot pedals
- Warm up function of engine and hydraulic system functions automatically
- Work lights —three front and two rear

## OPTIONAL EQUIPMENT

- Arm: 11' 6" (3.5 m) with rock guard
- Belly pan guard
- Boom and arm load (lock) valves
- Combined one-way or two-way auxiliary hydraulic piping (one or two pump) with hand or foot controls.
- Control pattern changer (ISO/BHL)
- Front rain visor
- High & wide lower
- Independent pump auxiliary rotation hydraulic system
- Large selection of buckets
- Long reach (50') with heavier counterweight
- Track shoe: 23.6" (600 mm) semi-triple bar grouser
- Track shoe: 27.6" (700 mm) double bar grouser
- Track shoe: 35.4" (900 mm) triple bar grouser
- Vandalism guards

## WORLD CLASS PRODUCTS DEMAND WORLD CLASS DEALERS

The purchase of a Kobelco excavator isn't the end, it's the beginning of our relationship together. Consider your local Kobelco dealer as your partner in productivity who will work with you to supply your business needs. Whether you need assistance in selecting the right model for your operation or developing an affordable leasing or financing plan through CNH Capital, your Kobelco dealer can offer you sound advice because he has decades of heavy equipment experience.

Downtime can happen at any time. And that's the best time to know you've got your Kobelco dealer's full service capabilities. He's the 'one stop shop' who is just down the street. Genuine Kobelco parts and all makes parts coverage, where and when you need them. Factory-trained service technicians, warranty experts and parts manager who are excavator experts. Fully equipped service vehicles which can bring responsive support to you quickly, to get you back up and running. Even customized professional maintenance programs, operator and technical training. You want your Kobelco equipment investment to be productive and keep your operation moving. **So do we.**



Your business deserves nothing less than world class product, supported by a world class business partner. That's your Kobelco dealer—your partner in productivity.

# KOBELCO®

Kobelco Construction Machinery America LLC  
245 E. North Avenue  
Carol Stream, IL 60188-2021  
866-726-3396 Toll Free  
630-260-4000  
630-260-4304 Fax

[www.kobelcoamerica.com](http://www.kobelcoamerica.com)

#### Products represented in this brochure may include optional equipment.

Note: Due to our policy of continual product improvement, all design, materials and/or specifications are subject to change without advance notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.

